

# SHURE

## SCM AUTOMATIC MIXERS



*Seamless Mixing. Intelligent Installs.*

## THEY'RE NOT JUST EASY. THEY'RE AUTOMATIC.

Shure SCM810 and SCM410 automatic mixers are the quickest, easiest, and most effective way to set up a multiple-mic room. Without clipping a syllable, they silently activate only the microphones being addressed and automatically adjust each microphone's threshold to changes in background noise.

It's proven technology. Networkable, configurable, and as simple as opening the box, plugging in, and connecting the microphones.

There's no need to buy specialized equipment, because both the SCM810 and SCM410 work with all professional wired and wireless microphones. When you choose a Shure automatic mixer, you get seamless automatic mixing right out of the box.



### WHY YOU NEED AUTOMATIC MIXING.

- *With too few open mics...* some talkers sound clear, while others seem far away.
- *With too many open mics...* there is a greater likelihood of feedback and too much background noise is added – making it hard for talkers to be heard clearly. And oftentimes, a talker's voice will be picked up by more than one microphone, resulting in poor audio quality.

Since it is difficult to select precisely the right number of microphones for adequate coverage with no overlap, the solution typically requires that someone turn microphones up and down as people speak. Not only does this demand fast hands, it involves a great deal of guesswork.

Shure automatic mixers address these concerns by opening mics as soon as they are needed and attenuating them when they are not in use.

## INTELLIMIX® CIRCUITRY: THE BRAINS OF THE OPERATION.

Shure Automatic Mixers feature our patented IntelliMix algorithm, the most effective automatic mixing technology on the market. IntelliMix combines three key functions: *Noise-Adaptive Threshold*, *MaxBus*, and *Last Mic Lock-On*.

*Noise-Adaptive Threshold* prevents false triggers by quickly distinguishing between constant background noise (such as air conditioning) and rapidly changing sounds (such as speech) for each channel input.

*MaxBus* delivers clear, natural audio by turning on only the best microphone for each speaker.


*Last Mic Lock-On* eliminates ambience dropouts, ensuring that there is always some background ambience present even if no one is currently speaking.

In addition, the *NOMA* (Number of Open Microphones Attenuator) ensures system stability with no feedback by automatically maintaining a consistent output level even as additional microphones are opened.

## TWO MIXERS. UNTOLD APPLICATIONS.

With the networking capability of both the SCM810 and the SCM410, you can connect the two mixers together (in any combination up to 400 microphones) to create the perfect setup for any size application.

Whether it's sound reinforcement, audio recording or broadcast, you now have a customizable automatic mixing solution for a variety of applications, including: Houses of Worship • Panel Discussions • Distance Learning • Hotel Sound • Courtrooms • Boardrooms • Teleconferencing • Videoconferencing

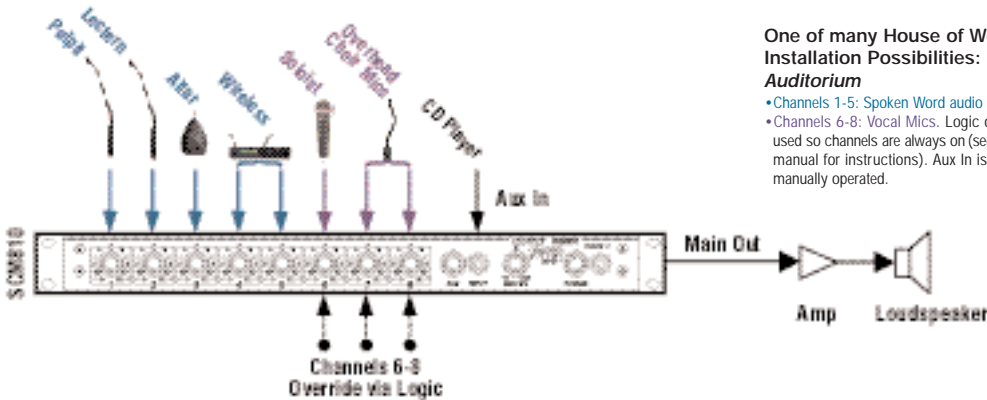


### One of many House of Worship Installation Possibilities: **Auditorium**

- Channels 1-5: Spoken Word audio sources
- Channels 6-8: Vocal Mics. Logic override used so channels are always on (see user's manual for instructions). Aux In is always manually operated.


## LOOKING FOR A FULL SET OF FEATURES? LOOK NO FURTHER.

In addition to the advanced technologies of IntelliMix and NOMA, Shure Automatic Mixers include a comprehensive set of features to help you customize them to your specific needs. Shared features of the SCM810 and SCM410 include:



Low Cut/High Shelving EQ Filters

- Individual channel gain control
- Adjustable low cut and high frequency shelving EQ filter per channel
- Master output level control
- TTL logic control
- AMX and Crestron™ compatibility
- Internal and external modifications to accommodate almost any installation need, including:
  - Mute any channel in output bus (for noise-inhibiting miking)
  - Channel group gating (for multi-channel choir miking)
  - Change any direct output to insert (send/return) point (for dynamics processing such as AGC, DFR, PEQ)

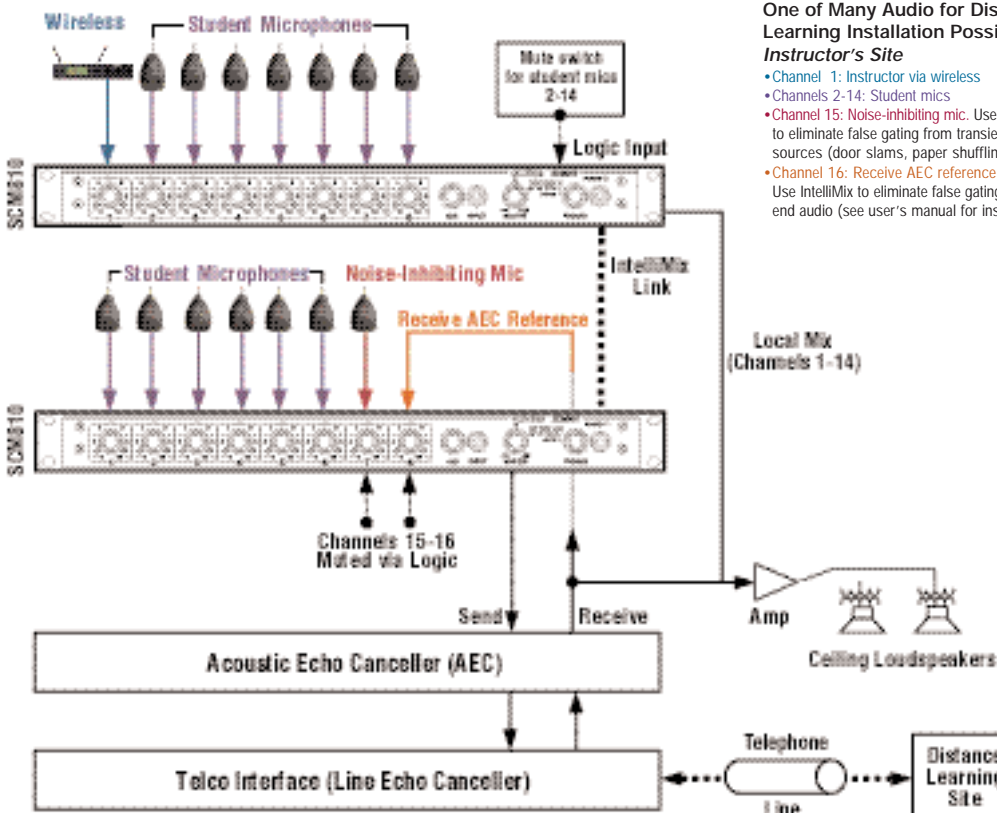

### One of Many Audio for Distance Learning Installation Possibilities: **Instructor's Site**

- Channel 1: Instructor via wireless
- Channels 2-14: Student mics
- Channel 15: Noise-inhibiting mic. Use any mic to eliminate false gating from transient noise sources (door slams, paper shuffling, etc.).
- Channel 16: Receive AEC reference audio. Use IntelliMix to eliminate false gating from far-end audio (see user's manual for instructions).





## FEATURES

**SCM810** – 9 inputs, 9 outputs

- Eight balanced mic-line input channels (Phoenix block connectors)
- One unbalanced 1/4" aux input level control
- Eight unbalanced 1/4" direct line level outputs
- One balanced master line/mic level output (Phoenix block connector)
- Selectable 48V phantom power per channel
- Level selectable peak output limiter
- Full rack width (single-rack height)

**SCM410** – 4 inputs, 2 outputs

- Four active balanced XLR mic level inputs
- One active balanced XLR mic/line selectable output
- One unbalanced RCA aux level output
- 12V phantom power
- +16 dBu peak output limiter
- Half-rack width (single-rack height)

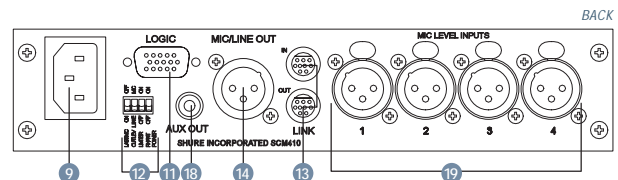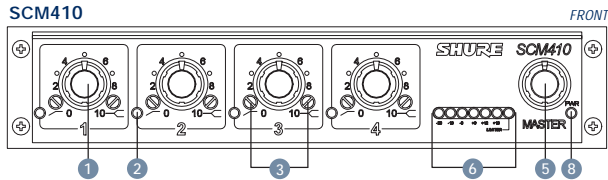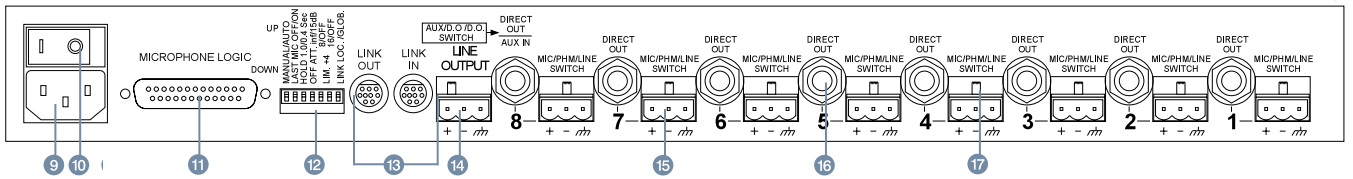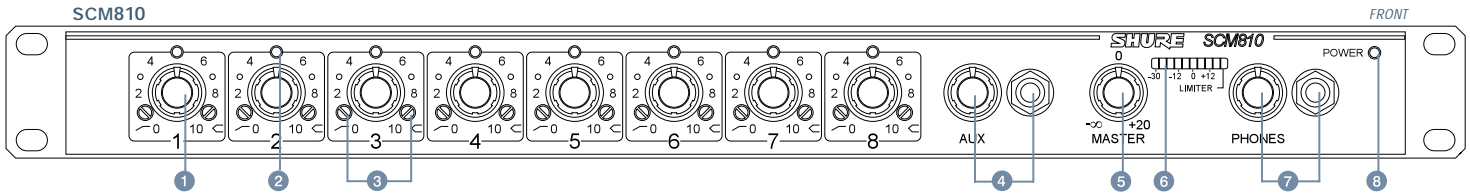

**FEATURES** (numbers correspond to both unless otherwise indicated)

**FRONT**

- SCM810 – microphone channel gain controls 1-8  
SCM410 – microphone channel gain controls 1-4
- Easy to view LEDs – light is green when channel is active and red at 6 dB below clipping
- Adjustable EQ – can adjust to reduce low-frequency signals, and boost or cut high-frequency signals
- Auxiliary Control and Input – for mixing external devices such as CD players (SCM810 only)
- Master Control – to set overall level
- Output Level LED Meter – indicates peak output signal and limiter action
- Headphone Control and Output provides monitoring of overall mixer output (SCM810 only)
- Power LED – lights green when unit is on

**BACK**

- 120 VAC Power Connector – can be internally changed to 230V Operation
- Power On/Off Rocker Switch (SCM810 only)
- Microphone Logic Connector – with mute, override and gate logic terminals for each channel
- DIP Switch allows for different setup options
- Link In/Out Jacks – allow linking of SCM410, SCM810, FP410, and AMS8100 mixers
- Mic/Line Output for connection to amplifiers, recorders, or other mixers (SCM410 modifiable for mic level, SCM810 is mic/line switchable)
- Mic/Line Switchable Block Connectors for fast and secure microphone connections (SCM810 only)
- Modifiable Direct Out/Insert 1/4" phone jacks on each channel (SCM810 only)
- Recessed Switch to set mic/line input level and 48V phantom (SCM810 only)
- Auxiliary Output – allows for use of consumer-level audio equipment (SCM410 only)
- XLR Microphone Connectors for quick and easy microphone connections (SCM410 only)

**SPECIFICATIONS** (specifications for both mixers unless otherwise indicated)

**FREQUENCY RESPONSE**

(at 1 kHz, channel controls centered)  
50 Hz to 20 kHz: ±2dB; -3 dB corner at 25 Hz

**VOLTAGE GAIN**

(typical, controls full clockwise)

SCM810	OUTPUT		
	line	headphones	direct out
mic	80 dB	88 dB	34 dB
line	40 dB	48 dB	-6 dB
aux	44 dB	52 dB	none
send/return	20 dB	28 dB	none
SCM410	line	mic	aux
mic	80 dB	40 dB	68 dB

**INPUT CLIPPING LEVEL**

SCM810: Mic: -15 dBV      Line: +22 dBV  
 Aux: +22 dBV      Send/Return: +18 dBV  
 SCM410: Mic: -14 dBV

**OUTPUT CLIPPING LEVEL**

SCM810: Line: +18 dBV      Headphones: +12 dBV  
 Direct Out: +18 dBV      Send/Return: +18 dBV  
 SCM410: Line: +24 dBV      Mic: -18 dBV  
 Aux: +14 dBV

**TOTAL HARMONIC DISTORTION**

<0.1% at +18 dBV output level, 50 Hz to 20 kHz (through 20 Hz - 20 kHz filter; input 1 and master at 5, all other controls full counterclockwise)

**COMMON MODE REJECTION**

>70 dB at 1 kHz

**POLARITY**

SCM810: Mic/Line, Send inputs to all outputs are non-inverting;  
 Aux input to all outputs is inverting  
 SCM410: All inputs to all outputs are non-inverting

**INPUT CHANNEL ACTIVATION**

Attack Time: 4 ms  
 Hold Time: 0.4 s (switchable to 1.0 s – SCM810 only)  
 Decay Time: 0.5 s

**OFF ATTENUATION**

SCM810: 15 dB (switchable to ∞)  
 SCM410: 13 dB

**EQUALIZATION**

Low-frequency: 6 dB/octave cut, adjustable corner from 25 to 320 Hz  
 High-frequency: ±6 dB at 5 kHz, ±8 dB at 10 kHz, shelving

**LIMITER**

Type: Peak  
 Threshold: SCM810: switchable: off, +4, +8, +16 dBu output  
 SCM410: switchable: off and +16 dBu at output

**PHANTOM POWER**

SCM810: 48 Vdc open-circuit through 6.8 kΩ series resistance  
 SCM410: 12 Vdc open-circuit through 680 Ω series resistance

**OPERATING VOLTAGE**

120 Vac, 60 Hz (SCM810 and SCM 410) or 230 Vac, 50 Hz (SCM810E and SCM410E)

**MICROPHONE LOGIC CONTROL PINS**

External voltage supply required: 5 Vdc, 100 mA  
 Logic output current sinking ability: 500 mA

**OVERALL DIMENSIONS**

SCM810: 44.5 mm H x 483 mm W x 317 mm D (1 3/4 x 19 x 12 1/2 inches)  
 SCM410: 44.5 mm H x 219 mm W x 268 mm D (1 3/4 x 8 5/8 x 10 1/2 inches)

**NET WEIGHTS**

SCM810: 4.3 kg (9.9 lbs)  
 SCM410: 1.75 kg (3.86 lbs)



www.shure.com

**United States:**  
 Shure Incorporated  
 5800 West Touhy Avenue  
 Niles, IL 60714-4608 USA

Phone: 847-600-2000  
 Fax: 847-600-1212  
 E-mail: info@shure.com

**Europe:**  
 Shure Europe GmbH  
 Wannenäcker Str. 28,  
 74078 Heilbronn, Germany

Phone: 49-7131-72140  
 Fax: 49-7131-721414  
 E-mail: info@shure.de

**Asia:**  
 Shure Asia Limited  
 Unit 301, 3rd Floor  
 Citicorp Centre  
 18, Whitfield Road  
 Causeway Bay, Hong Kong

Phone: 852-2893-4290  
 Fax: 852-2893-4055  
 E-mail: info@shure.com.hk

**Elsewhere:**  
 Shure Incorporated  
 International Americas  
 Middle East & Africa

Phone: 847-600-2000  
 Fax: 847-600-6446  
 E-mail: international@shure.com