



BAL650C-4

FLUORESCENT EMERGENCY BALLAST

One or two-lamp emergency illumination
for 4-pin fluorescent lamps (with integral starter)



APPLICATION


The BAL650C-4 fluorescent emergency ballast works in conjunction with an AC ballast to convert new or existing fluorescent fixtures into emergency lighting. The emergency ballast consists of a high-temperature nickel cadmium battery, charger and electronic circuitry in one compact white case. The BAL650C-4 can be used with one 13 - 42 W or two 13 - 39 W (4-pin) twin, quad and triple twin-tube compacts. It is also compatible with most one-, two-, three-, and four-lamp electronic, standard, energy-saving and dimming AC ballasts. If used in an emergency-only fixture, no AC ballast is necessary. The BAL650C-4 is suitable for indoor locations and is not suitable for air handling heated air outlets or for wet or hazardous locations. For information about specific lamp and ballast compatibility, please call the factory.

OPERATION


When AC power fails, the BAL650C-4 immediately switches to the emergency mode, keeping either one or two lamps illuminated at a reduced lumen output for a minimum of 90 minutes. When AC power is restored, the BAL650C-4 automatically returns to the charging mode.

INSTALLATION

The BAL650C-4 does not affect normal fixture operation and may be used with either a switched or unswitched fixture. If a switched fixture is used, an unswitched hot lead must be connected to the emergency ballast. The emergency ballast must be fed from the same branch circuit as the AC ballast. The BAL650C-4 may be installed on top of or remote from the fixture. The emergency ballast may be remotely installed up to half the distance the AC ballast manufacturer recommends remoting the AC ballast from the lamp or up to 50 feet, whichever is less. For simple visual inspection of the charging indicator light and easy operational testing, the test/monitor plate can be installed near the fixture wall switch. Or, it can be installed in the ceiling near the fixture to ensure an unobtrusive installation. Installation is not recommended with fixtures where the ambient temperature may fall below 0°C.

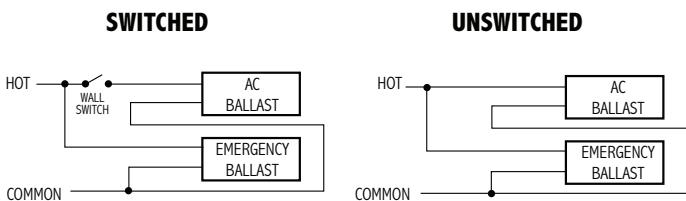

Primary circuit only. Lamp leads not shown.

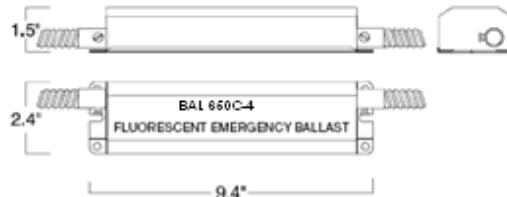

UL AND CODE COMPLIANCE

The BAL650C-4 has been tested by Underwriters Laboratories in accordance with the standards set forth in UL 924, "Emergency Lighting and Power Equipment," and is UL Listed for factory or field installation. Emergency illumination time exceeds the National Electrical Code (NEC), Life Safety Code (NFPA-LSC) and UL 90-minute requirements.

BATTERY

Because high temperatures exist in fluorescent fixtures, the BAL650C-4 uses a specially constructed, high-temperature nickel cadmium battery. This battery requires no maintenance and has a life expectancy of 7- 10 years.

EMERGENCY ILLUMINATION

Depending on the number (one or two), wattage and type of lamps selected, the BAL650C-4 produces 300 to 750 lumens initial emergency light output (contact factory for specific information on the lumen output for different lamps). If two-lamp operation is selected, light output is evenly divided between the lamps for better distribution of emergency illumination. Emergency lumen output will be less with one-lamp operation.



SPECIFICATION

Emergency lighting shall be provided by using a standard fluorescent fixture equipped with a Best BAL650C-4 emergency ballast. This emergency ballast shall consist of a high-temperature, maintenance-free nickel cadmium battery, charger and electronic circuitry contained in one 9 3/8" x 2 3/8" x 1 1/2" white metal case with 2' lengths of flexible conduit at each end. A test/monitor plate with a solid-state charging indicator light to monitor the charger and battery, a single-pole test switch and installation hardware shall be provided. The emergency ballast shall be capable of operating One or Two 6W -28W Tubular fluorescent lamps; One or Two 13W – 32W and One 40W – 42w 4-pin Compact fluorescent lamps (with no integral starters) in the emergency mode for a minimum of 90 minutes. The BAL650C-4 shall produce 300 to 750 lumens initial emergency light output, have 3.5 Watts of input power, have a 14.4 Watt-hour battery capacity and comply with emergency standards set forth by the current NEC. The emergency ballast shall be UL Listed for installation on top of or remote from the fixture and shall be warranted for a full five years from date of purchase.

WARRANTY

Model BAL650C-4 is warranted for five (5) full years from date of purchase. This warranty covers only properly installed BEST emergency ballasts used under normal conditions. For the warranty period Best will, at its option, repair or replace without charge, a defective emergency ballast provided it is returned to the factory transportation prepaid and our inspection determines it to be defective under terms of the warranty. Repair or replacement, as stated above, shall constitute the purchaser's exclusive warranty, which does not extend to transportation, installation, labor or any other charges; nor does it apply to any equipment of another manufacturer used in conjunction with the emergency ballast.

PRODUCT SUMMARY

UL LISTED
Factory or Field
Installation

ILLUMINATION
90 Minutes

INITIAL LIGHT OUTPUT
300-750 Lumens

FULL WARRANTY
5 Years (NOT pro-rata)

DUAL VOLTAGE INPUT
120/277 VAC
60 Hz

AC INPUT CURRENT
280mA

AC INPUT POWER RATING
3.5 Watts

TEST SWITCH
Single pole

BATTERY
High-Temperature
Maintenance-Free
Nickel-Cadmium Battery
7-10 Year Life Expectancy

BATTERY CHARGING CURRENT
280mA

RECHARGE TIME
24 Hours

CHARGING INDICATOR LIGHT
LED

TEMPERATURE RATING (AMBIENT)
0°C TO +55°C
(32°F TO 131°F)

DIMENSIONS
9.4" x 2.4" x 1.5"
(238mm x 60mm x 38mm)
2' (610mm) Flexible conduit
Mounting center 8.9" (226mm)

WEIGHT
2.1 lbs (1 kg)

BAL650C-4

FLUORESCENT EMERGENCY BALLAST
One or two-lamp emergency illumination
for 4-pin fluorescent lamps (with integral starter)

