
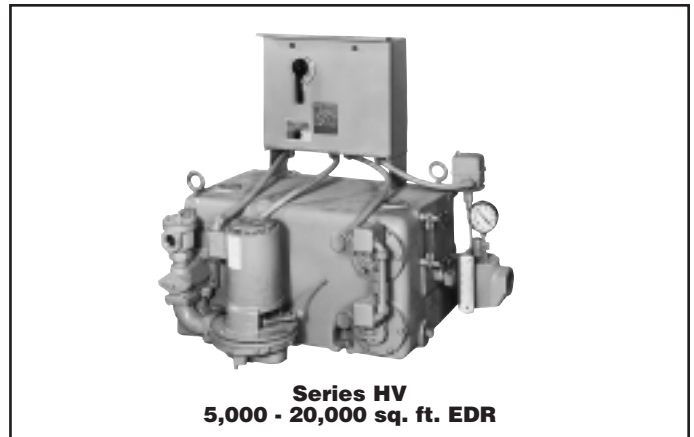


Vacuum Heating Units (Built to Order)

Series HV®

Hoffman Series HV® Vacuum Heating Units provide condensate transfer and fast, even, steam distribution throughout residential, commercial, institutional, and industrial heating systems.

- For systems up to 65,000 sq. ft. EDR
- Includes two compartment, cast iron receiver with 20 year warranty against corrosion
- Available with receivers from 23 - 100 gallons (87 - 379 liters)
- Available with pumps in simplex or duplex design
- Low height NPT inlet for easy return line piping
- Separate NPT connections provide a secondary vent for safe operation
- NPT drain connection
- Double pole float switch - simplex models
- Mechanical alternator - duplex models
- 100% factory tested as a complete unit
- Bronze fitted pumps available in 3500 or 1750 RPM
- Includes inlet basket strainer and gauge glass with protective brass rods and shut-off valve
- Optional equipment
 - Discharge pressure gauges
 - Control panel
- Maximum air capacity 22 CFM (0.013M³/s)
- Maximum discharge pressure 40 psi (276 kPa)
- Pump seal maximum temperature 250°F (121°C)

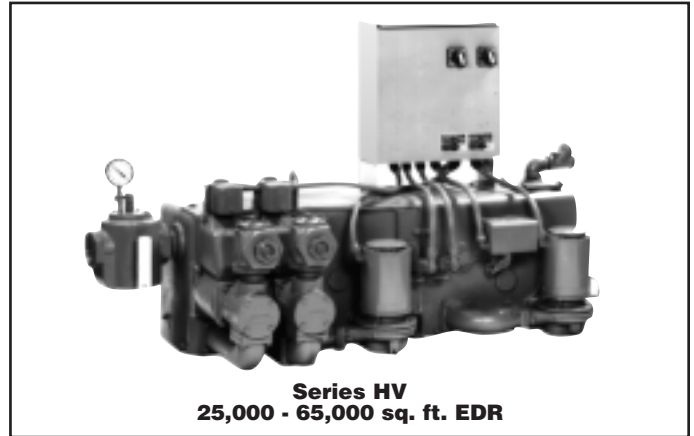

* Contact your Hoffman representative for sizing details.