

# industrial booths

## EZ INDUSTRIAL ENCLOSURE

- EZ TO QUICK SHIP
- EZ TO INSTALL
- EZ TO OPERATE
- EZ TO MAINTAIN

Air flows in through the filtered double entry doors in the front of the booth, passes through the booth's working area, and into the filtered exhaust chamber located in the rear of the booth. This filtered exhaust air is drawn through the exhaust plenum and discharged upward into the atmosphere through the exhaust stack. Our EZ industrial booths make efficient use of your valuable floor space and are available in three heights to accommodate your needs.

### LIGHTING FEATURES

Bright full-booth illumination is provided by four 48", four-tube, 32-watt fluorescent light fixtures placed in the ceiling panels and side walls. Each is sealed behind clear tempered safety glass. All fixtures are UL listed and approved for their intended use and placement. The light tubes are not furnished with the fixtures.

### CONSTRUCTION FEATURES AND QUALITY STANDARDS

All booth and plenum sections are made with 18-gauge galvanized steel. All product and personnel access doors are pre-hung in heavy gauge galvanized steel frames for easy installation. Brixon™ latches are provided for each door opening.



A tube axial type duct fan and motor specifically designed and constructed for use in paint spray booths and similar applications is provided for exhaust.

All hardware, filters and sealants needed for the booth installation are included. The control panel and other electrical components may be purchased separately.

**Col-Met Spray Booth products comply with all OSHA and NFPA regulations.**


## EZ INDUSTRIAL ENCLOSURE

Model Number	Interior Dimensions			Exterior Dimensions			Access Doors	Nominal Door Opening				Lights Open	Air Flow SCFM	Fan Spec.		Filters	
	Width	Height	Length	Width	Height	Length		Width	Height	Qty	Type			Dia.	HP	Int.	Exh.
EIE-1208	12'-0"	8'-0"	12'-4"	12'-4"	8'-2"	12'-8"	1	11'-4"	7'-10"	1	Filtered	4	9,600	30"	2HP	24	20
EIE-1210	12'-0"	10'-0"	12'-4"	12'-4"	10'-2"	12'-8"	1	11'-4"	9'-10"	1	Filtered	4	12,000	30"	3HP	30	25
EIE-1212	12'-0"	12'-0"	12'-4"	12'-4"	12'-2"	12'-8"	1	11'-4"	11'-10"	1	Filtered	4	14,400	30"	5HP	30	25

**BOOTH DIMENSIONS AND SPECIFICATIONS ON REVERSE SIDE**


# BOOTH DIMENSIONS AND SPECIFICATIONS

## EZ INDUSTRIAL ENCLOSURE

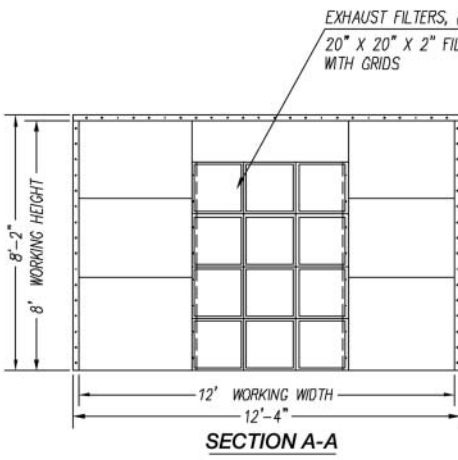

EXHAUST FILTERS, (20) SUPPLIED  
20" X 20" X 2" FILTERS  
WITH GRIDS

**SECTION A-A**

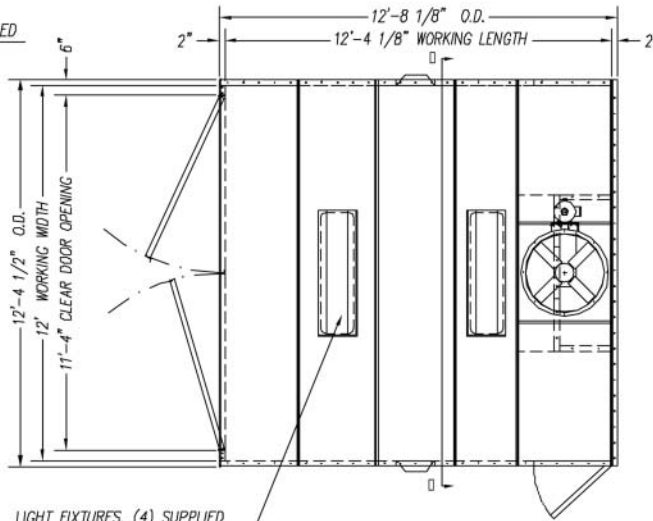


**PLAN VIEW**


LIGHT FIXTURES, (4) SUPPLIED  
FOUR TUBE 48"; 32 WATT FIXTURES  
MOUNTED BEHIND CLEAR TEMPERED GLASS  
PANES, "UL" RATED FOR THEIR INTENDED  
USE AND PLACEMENT, (4 OPEN TYPE)

30" DIA TUBEAXIAL FAN UNIT  
RATED FOR 9,600 SCFM EXHAUST @  
1/2" SP; DRIVEN BY A 2 HP ODP TYPE  
MOTOR

FILTERED PRODUCT ENTRY DOORS  
EQUIPPED WITH 24 TACKY INTAKE  
FILTERS 20"x20"x1", 1 PANIC LATCH,  
DOOR SWITCH, SWEEP SEAL AND  
HARDWARE.

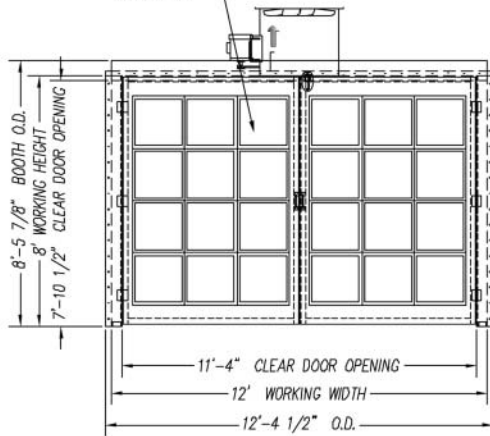

**END VIEW**

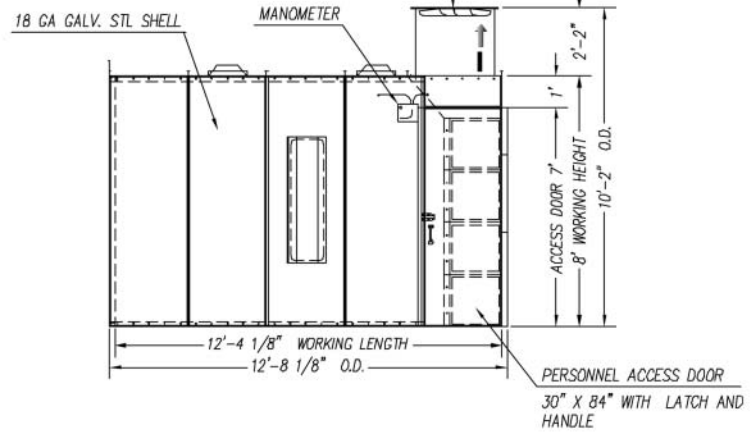

**SIDE ELEVATION**

### Col-Met Spray Booths

Dallas, TX // e-mail: sales@colmetsb.com

toll free: 888.452.6684 // www.colmetsb.com

02/06 CA

