


"QUALITY PUMPS SINCE 1939"

Product information presented here reflects conditions at time of publication. Consult factory regarding discrepancies or inconsistencies.

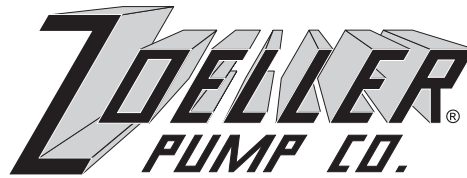

SECTION: 8.10.012

FM1216

0703

Supersedes

0402

MAIL TO: P.O. BOX 16347 • Louisville, KY 40256-0347
SHIP TO: 3649 Cane Run Road • Louisville, KY 40211-1961
(502) 778-2731 • 1 (800) 928-PUMP • FAX (502) 774-3624

visit our web site:
<http://www.zoeller.com>

MODEL 105 Drain Pump

DRAIN PUMP ADVERTISING COPY

PUMP FEATURES

- .3 HP
- Powder Coated Epoxy Cast Iron/Plastic.
- Non-clogging Vortex Impeller.
- Passes 1/2" solids.
- All stainless fittings.
- 1 1/2" discharge.
- Thermal overload protected motor.
- Pumps 43 gallons per minute at 5' TDH.
- UL Listed.

CHECK VALVE FEATURES

- PVC construction.
- Vertical or horizontal installation.
- Full flow design.
- 1 1/2" or 1 1/4" slip x slip union.
- Easy to install.

BASIN FEATURES

- 1 1/2" compression slip fit for top and side inlets.
- Rugged polyethylene construction.
- Corrosion resistant.
- Gasketed polyethylene lid.
- 1 1/2" NPT discharge.
- 2" NPT vent.
- Gas tight/odor free.
- Maximum diameter 14 1/2".
Maximum height 12 1/2".
- IAPMO Listed (passes 10' water stack test).
- No screens or inlet filters to clean.

COPY

Removes water from areas where gravity flow won't work. Applications include laundry tray pump, wet bar sink, air conditioning condensate or dehumidifier water removal. Maintenance free - No filters to clean. A problem solving product with proven performance. IAPMO Listed.