

Product information presented here reflects conditions at time of publication. Consult factory regarding discrepancies or inconsistencies.

MAIL TO: P.O. BOX 16347 • Louisville, KY 40256-0347
 SHIP TO: 3649 Cane Run Road • Louisville, KY 40211-1961
 (502) 778-2731 • 1 (800) 928-PUMP • FAX (502) 774-3624

visit our web site:
www.zoeller.com

ZOELLER ON-SITE WASTEWATER PRODUCTS

ZOELLER SEPTIC SYSTEM FILTERS




Zoeller Pressure Effluent Filter

The Zoeller Pressure Filter will help prolong the life of an on-site drain-field by filtering out solids which cause plugging. Used in both residential and commercial applications, this unique design and mounting location allows the filtering screen to be scrubbed while in operation, providing maximum maintenance intervals and unmatched performance.

The filter screen is a type 347 S.S. with .062 diameter holes, which controls the particle sizes leaving the tank. By using sock inserts, filtration to 100 or 600 microns is achieved. The element is 3 inches in diameter and 18 inches long with a 69.5 square inch open area. The large open area results in minimal head loss (see below).

Use in low-pressure pipe, drip, or enhanced flow applications. Use as a prefilter for dosed treatment devices such as recirculating media filters.

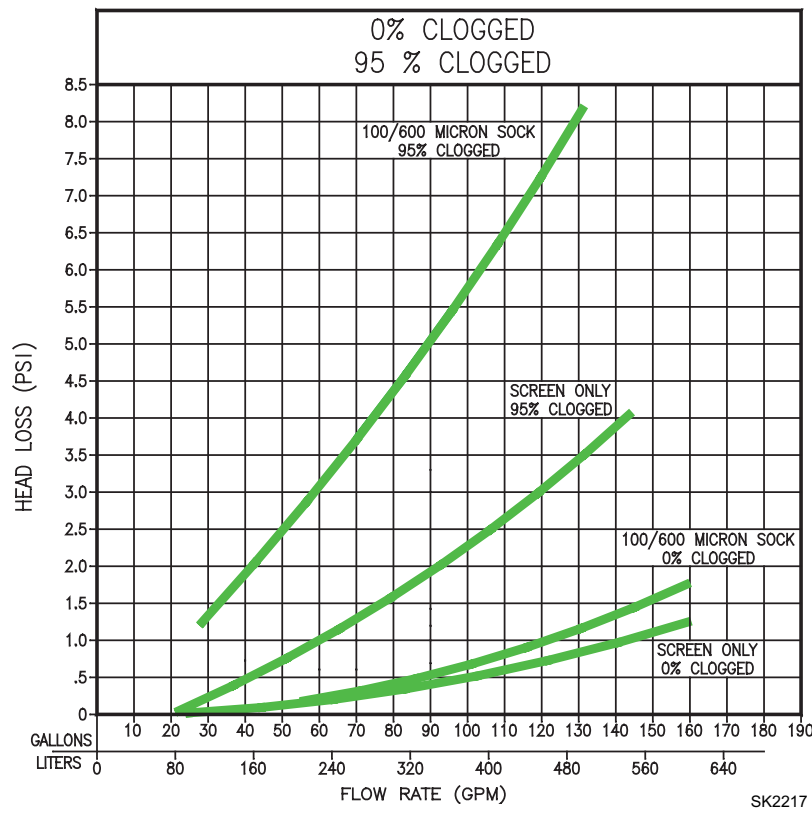

Part Number	Description
5000-0001	2" inlet/outlet
5000-0008	3" inlet/outlet
5000-0013	Replacement Screen (fits 2" or 3" models)

Zoeller Septic System Pressure Filter Accessories

PROTECTIVE SOCK

100 and 600 Micron Protective Sock for finer filtration. The 100 Micron sock can be used in conjunction with most drip systems.



P/N 5000-0002 100 Micron Sock
P/N 5000-0003 600 Micron Sock

PRESSURE ALARM SWITCH

The pressure switch will activate an alarm in the event of a clogged filter. Adjustable pressure alarm switch can be adjusted between 3 to 24 lbs. standard. Supplied with 5 ft. of - 1/4" tubing, adjustable switch and 10 ft. of electrical cord.



P/N 5000-0006 Pressure Alarm Switch
(order alarm separately)

ALARM



Tested to UL Standard UL 508 & Certified to CSA Standard C22.2 No. 205

Indoor/Outdoor alarm box to work with the pressure alarm switch. Visual red light & audible alarm. 115 V. UL Listed and CSA Certified.



P/N 10-0623 Indoor/Outdoor Alarm

LID WRENCH & FILTER REMOVAL TOOLS

The 40" long standard screen removal wrench is designed to easily pull and insert the filter using the hooked end and open the filter cap using the boxed end.


The bristle screen removal wrench is designed to remove the filter without tearing the optional protective socks.



P/N 5000-0004 Standard screen removal wrench.

P/N 5000-0005 Bristle screen removal wrench (use with protective socks).

Product may not be exactly as pictured.

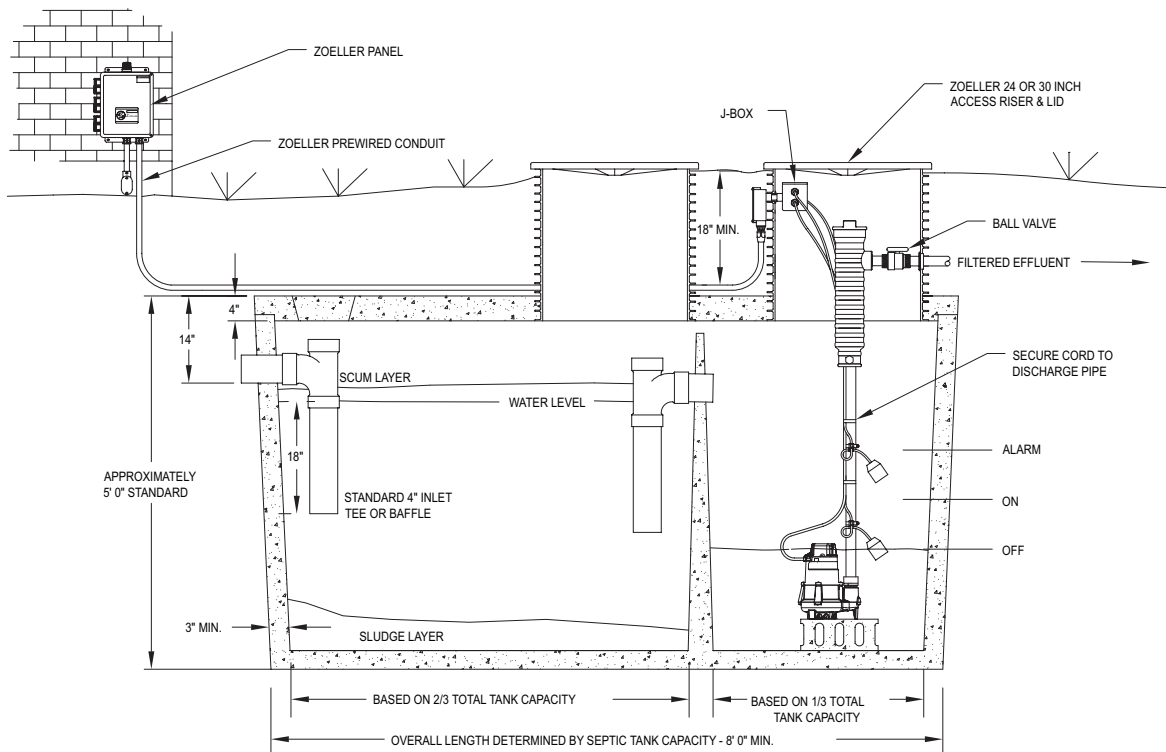

SK2168

ALL ZOELLER ON-SITE WASTEWATER PRODUCTS MUST BE INSTALLED IN ACCORDANCE WITH LOCAL AND/OR STATE PLUMBING AND/OR HEALTH DEPARTMENT CODES.



www.zoeller.com

ZOELLER
PUMP CO.

MAIL TO: P.O. BOX 16347
Louisville, KY 40256-0347
SHIP TO: 3649 Cane Run Road
Louisville, KY 40211-1961
(502) 778-2731 • 1 (800) 928-PUMP
FAX (502) 774-3624

Manufacturers of . .

"QUALITY PUMPS SINCE 1939"