


"QUALITY PUMPS SINCE 1939"

Product information presented here reflects conditions at time of publication. Consult factory regarding discrepancies or inconsistencies.

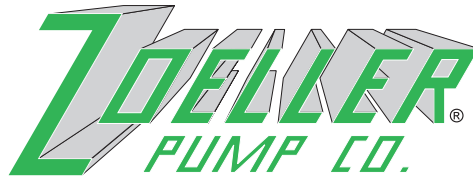

SECTION: 2.60.067

FM1748

1103

Supersedes

0902

MAIL TO: P.O. BOX 16347 • Louisville, KY 40256-0347  
 SHIP TO: 3649 Cane Run Road • Louisville, KY 40211-1961  
 (502) 778-2731 • 1 (800) 928-PUMP • FAX (502) 774-3624

visit our web site:  
<http://www.zoeller.com>

Zoeller Company is proud to the addition of the self-priming Sprinkler Pump to its product. The unique design allows for lawn sprinkling saturation in areas where high water pressure is not available or inadequate. Quality features include a heavy duty motor ranging from 3/4 HP to 2 HP, a large volume pump housing that ensures quick and easy self-priming operation, mechanical seal, and an air volume control connection. With a versatile and compact design to fit in tight places, these lawn sprinkler pumps can be field wired for 115V or 230V applications. This pump comes preassembled and ready for installation.



330-331-332-333

Cast Iron Series

**"LAWN SPRINKLER"  
 PUMP**

SPECIFICALLY DESIGNED FOR LAWN IRRIGATION APPLICATIONS



**COMPARE THESE FEATURES**


- Cast iron pump housing.
- Air volume control connection.
- Self-priming after initial fill of pump housing.
- Models 330/331/332 use high impact molded plastic impeller.
- Model 333 comes standard with a brass impeller.
- Mechanical seal.
- Top suction.
- Large reservoir.
- 3/4 HP thru 2HP/ 3450 RPM.
- Carbon ceramic seal.
- 2" suction and 1 1/2" discharge.
- Mounting bracket.
- 56 frame, NEMA J, capacitor start, double ball bearing motors designed for continuous operation.
- cCSAus listed.

**APPLICATIONS**

- Irrigation.
- Lawn sprinkler systems.
- Gardens.
- General purpose water transfer.


Model	HP	A	B	C	D	E	F	G	H	J
NE330	3/4	4.25	5.25	7.69	9.75	11.25	3.63	9.25	9.00	16.63
NE331	1	4.25	5.25	7.69	9.75	11.25	3.63	9.25	9.00	17.13
NE332	1-1/2	4.25	5.25	7.69	9.75	11.25	3.63	9.25	9.00	17.75
NE333	2	4.25	5.25	7.69	9.75	11.25	3.63	9.25	9.00	18.25

\*NE model pumps can be field wired for 115V or 230V applications.

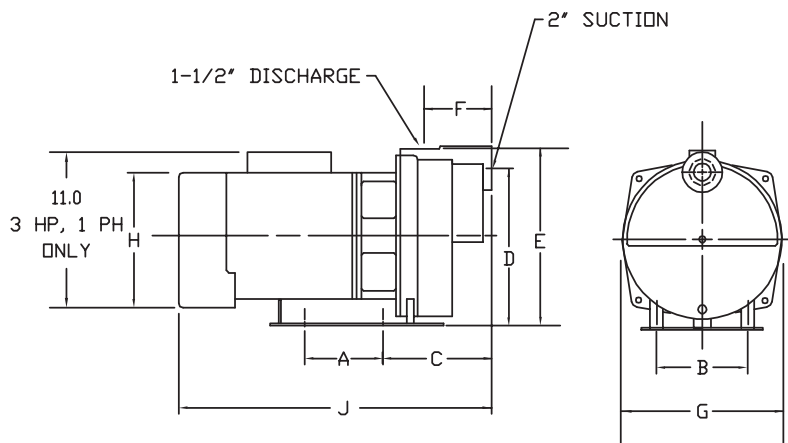

## PUMP PERFORMANCE

Model	HP	Suction Lift Feet	Discharge Pressure (PSI)								Shut off Pressure PSI	Suction Pipe Tap	Discharge Pipe Tap
			U.S. GALLONS PER MINUTE										
			10	15	20	25	30	35	40	45			
330	3/4	5	56	48	42	37	29	21			41	2"	1-1/2"
		15	47	42	37	29	22	12			37		
		25	43	37	31	22	10			33			
331	1	5	58	53	48	43	38	32	23	11	48	2"	1-1/2"
		15	53	48	45	37	31	24	12	43			
		25	48	44	38	33	25	14		39			
332	1-1/2	5	78	77	74	70	62	53	43	30	47	2"	1-1/2"
		15	70	68	66	62	53	43	30	41			
		25	47	46	45	44	42	34		36			
333	2	5	86	84	81	77	71	62	52	40	50	2"	1-1/2"
		15	76	74	72	69	64	55	43	25	45		
		25	52	51	50	47	45	42	30		40		

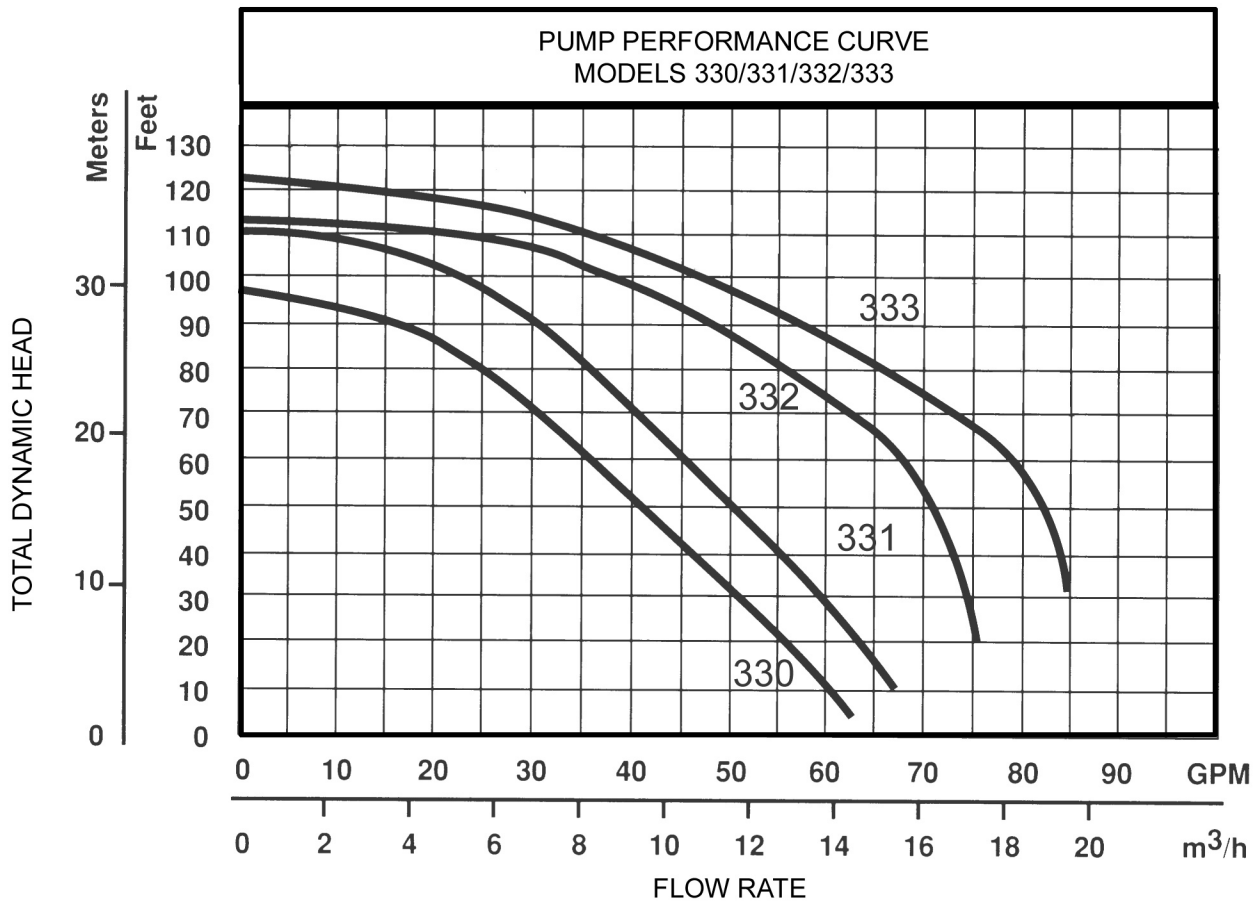

### RESERVE POWERED DESIGN

For unusual conditions a reserve safety factor is engineered into the design of every Zoeller pump.



<http://www.zoeller.com>

ZOELLER

PUMP CO.

MAIL TO: P.O. BOX 16347  
Louisville, KY 40256-0347  
SHIP TO: 3649 Cane Run Road  
Louisville, KY 40211-1961  
(502) 778-2731 • 1 (800) 928-PUMP  
FAX (502) 774-3624

Manufacturers of..

"QUALITY PUMPS SINCE 1939"