



HAVE A SPECIAL APPLICATION?
Specialty ties from Avery Dennison are ideal for securing harnesses (screw mounts and push mounts), prototyping (releasables), harnessing two bundles simultaneously (double headed), and for identification purposes (ID ties).

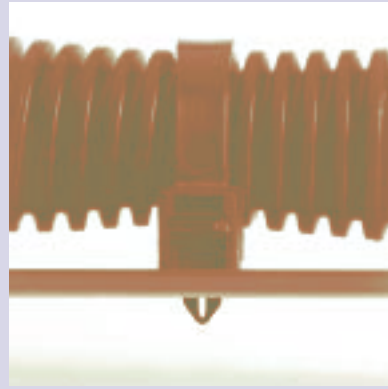


ONE STEP FASTENING... Push-Mount cable ties
from Avery Dennison. Simply push into a pre-drilled hole for a simple and secure one piece harness. Winged Push-Mount ties are for variable panel thicknesses up to 1/8" (3.175mm) and a hole diameter of 1/4" (6.35mm).



Length: 7.5"/190.5mm, width: .177"/4.50mm, thickness: .050"/1.27mm

7.5" (190.5 mm) PUSH-MOUNT


PART #	MATERIAL/STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	PKG QTY	CASE QTY
08414	NATURAL PUSH MOUNT	7.5"/190.5mm	1/16"-1-3/4"/1.59mm-44.45mm	50 LBS./22.68kg	1000/BAG	5M
08439	NATURAL PUSH MOUNT				100/BAG	5M
08445	BLACK/HS/PUSH MOUNT				1000/BAG	5M
08446	BLACK/WR/PUSH MOUNT				1000/BAG	5M



Length: 11"/279.4mm, width: .177"/4.50mm, thickness: .050"/1.27mm

11" (279.4 mm) PUSH-MOUNT

PART #	MATERIAL/STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	PKG QTY	CASE QTY
10355	NATURAL PUSH MOUNT	11"/279.4mm	1/16"-3"/1.59mm-76.2mm	50 LBS./22.68kg	1000/BAG	5M
10359	BLACK/WR/PUSH MOUNT				100/BAG	1M





Length: 4"/101.6mm, width: .095"/2.41mm, thickness: .039"/.99mm

4" (101.6 mm) WINGED PUSH-MOUNT

PART #	MATERIAL/STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	PKG QTY	CASE QTY
10690	NATURAL WINGED PUSH MOUNT	4"/101.6mm	1/16"-7/8"/1.59mm-22.23mm	18 LBS./8.16kg	1000/BAG	5M
10691	BLACK/HS/WINGED PUSH MOUNT				1000/BAG	5M


Screw Mount Ties are preferred when position is critical or the operation requires the product be pre-mounted to a surface before final assembly.

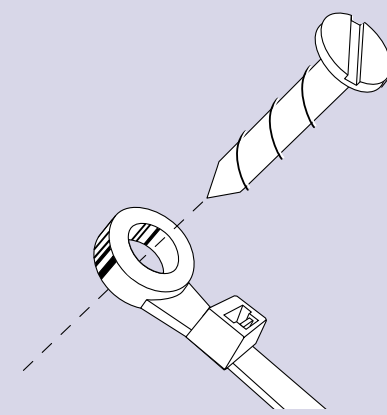

Length: 7.5"/190.5mm, width: .177"/4.50mm, thickness: .055"/1.40mm

7.5" (190.5 mm) for #10 screws SCREW MOUNT


PART #	MATERIAL/STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	PKG QTY	CASE QTY
08415	NATURAL SCREW MOUNT	7.5"/190.5mm	1/16"-1-3/4"/1.59mm-44.45mm	50 LBS./22.68kg	1000/BAG	5M
08484	NATURAL SCREW MOUNT				100/BAG	5M
08443	BLACK/HS/SCREW MOUNT				1000/BAG	5M
08444	BLACK/WR/SCREW MOUNT				1000/BAG	5M
08318	BLACK/WR/SCREW MOUNT				100/BAG	5M



Length: 11"/279.4mm, width: .177"/4.50mm, thickness: .050"/1.27mm

11" (279.4 mm) for #10 screws SCREW MOUNT

PART #	MATERIAL/STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	PKG QTY	CASE QTY
10350	NATURAL SCREW MOUNT	11"/279.4mm	1/16"-3"/1.59mm-76.2mm	50 LBS./22.68kg	1000/BAG	5M
10351	BLACK/HS/SCREW MOUNT				1000/BAG	5M
10352	BLACK/WR/SCREW MOUNT				1000/BAG	5M
10354	BLACK/WR/SCREW MOUNT				100/BAG	1M



Length: 14.5"/368.3mm, width: .250"/6.35mm, thickness: .075"/1.91mm

14.5" (368.3 mm) for 1/4" (6.35 mm) screws SCREW MOUNT TIE

PART #	MATERIAL/STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	PKG QTY	CASE QTY
10035	NATURAL SCREW MOUNT	14.5"/368.3mm	3/16"-3.5"/4.76mm-101.6mm	120 LBS./54.43kg	100/BAG	1M
08426	NATURAL SCREW MOUNT				50/BAG	1M
08441	BLACK/HS/SCREW MOUNT				100/BAG	1M
10040	BLACK/WR/SCREW MOUNT				100/BAG	1M

FOR AN ADDED DIMENSION OF SECURITY, AVERY DENNISON™ SCREW-MOUNT TIES. Easily applied, these cable ties keep your application secure and positioned exactly where it needs to be.