
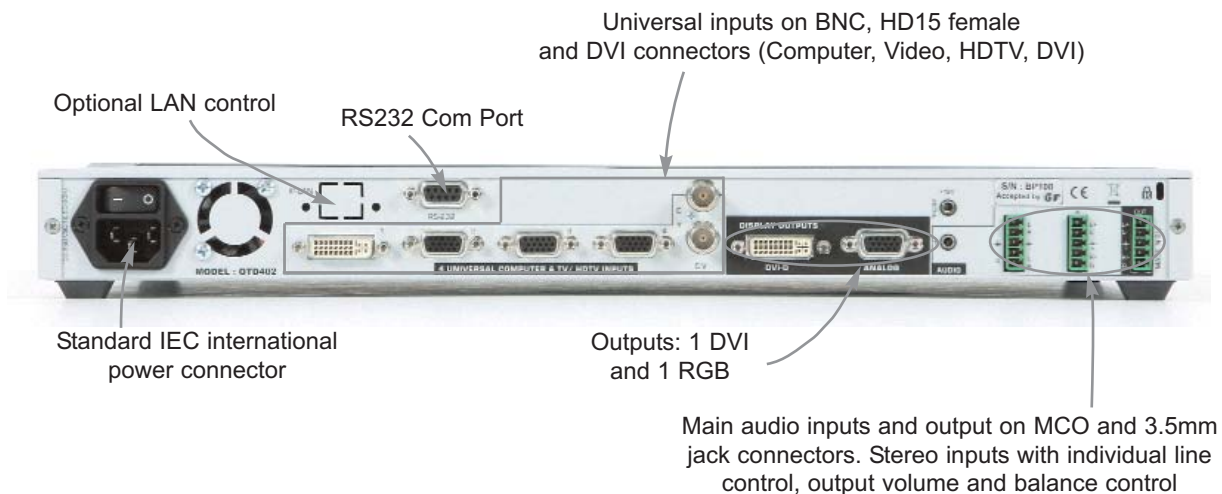
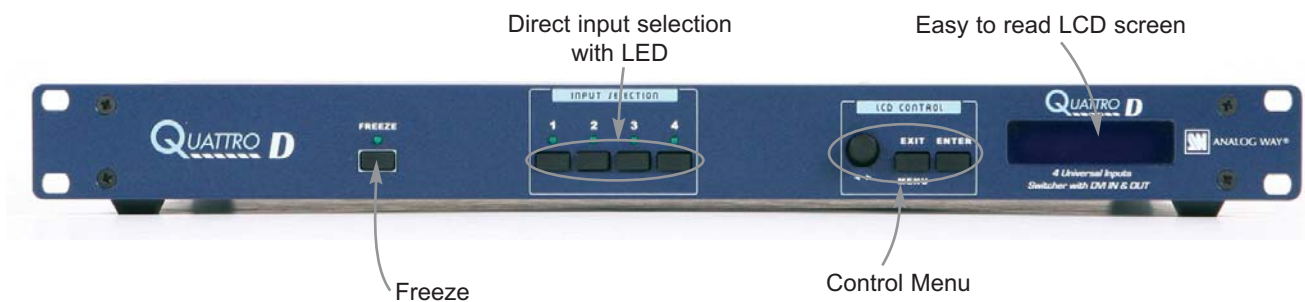


Quattro D™

HD Seamless Switcher for Conference Rooms, Houses of Worship and Large Screen Projections

New!

Model. QTD402

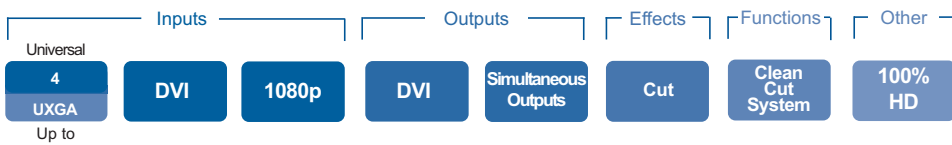

Inputs

- Analog and Digital Inputs/Outputs up to 1080p
- 4 universal inputs with 1 DVI
- Computer and DVI up to UXGA / 1080p
- Video : NTSC/PAL/SECAM, S. Video, YUV, RGB, HDTV
- 4 Stereo Audio with level adjustment for each input

Outputs

- 1 DVI + 1 RGB up to UXGA / 1080p
- Audio Stereo with level adjustment

Effects

- Seamless Cut
- Ultra fast and smooth or colored switching
- Auto centering of image
- Time Base Corrector



ANALOG WAY®

www.analogway.com

P/N : QTD402/C1007-VA

Seamless Switchers

Technical Specifications

4 Universal Inputs

- **Composite Video** NTSC = 15.735 kHz/60 Hz
PAL/SECAM = 15.625 kHz/50Hz
- **S.Video (Y/C)** NTSC = 15.735 kHz
PAL/SECAM = 15.625 kHz/50Hz
- **Component (YUV)** 15.625 kHz/50 Hz – 625L
15.735 kHz/60 Hz – 525L
- **RGB/S** (TTL or 0.3V Analog), **RGsB** (SOG: 0.3V Analog),
15.625 kHz/50 Hz - 625L, 15.735 kHz/ 60 Hz - 525L
- **HDTV:** Component (HDYUV 2/3 Level Sync.) 1080i/60-50Hz,
720p/60-50Hz, 480p/60Hz
- **Computer** (RGB HV, RGB/S and RGsB): PC, Mac, Workstation.
Automatic Sync. & centering. Resolution from 640x480 to
1600x1200 (up to 110kHz)
- **DVI:** Digital computer up to 1600x1200 RB/60Hz and
1920x1080/60Hz (Fpx: 165MHz max)

Audio Inputs

- **4 Stereo Inputs**
 - Zi = 20 kOhms unbalanced
 - 1 balanced audio input Zi = 40 kOhms balanced
 - 3 unbalanced audio inputs Gain: adjustable
 - Vi = + 18 dBu max

Display Output

- 1 x Buffered output (1 on HD15 F connector
connector) RGB HV, RGB/S or RGsB selectable (H&V separated,
Sync. Composite or SOG), RGB= 0.7Vp/p (75 Ohms)
- 1 x DVI-D on DVI-I connector
- Resolution: **4/3 & 5/4** = SVGA, XGA, SXGA+, UXGA,
16/9 & 16/10 = WVGA, WSVGA, WXGA, WSXGA, WSXGA+,
1080p
- Rate: Internal 50, 60, 72(*) & 75(*) Hz (Follow)
(*) : depending on resolution

Audio Output

- Stereo output (balanced & unbalanced)
- Vo = + 18 dBu max - Zo = 300 Ohms (unbalanced)
- Vo = + 24 dBu max - Zo = 600 Ohms (balanced)
- G = 0dB nominal, with volume

User Controls and Connectors

FRONT PANEL

User controls:

- Selection of inputs 1 to 4
- Freeze

• LCD window & control buttons for menu:

Test patterns, proc. image adjust., input format selection, output
format display, output format & sync., audio input level and output,
volume adjustments, position & size adjustments, front panel
control lockout

REAR PANEL

Input Connectors:

- Input #1: DVI-I
- Inputs #2 and #3: HD 15F
- Input #4: HD 15F + 2 BNC
- Audio inputs 2 to 4 and auxiliary: on 5-pin screw terminal
- Audio inputs 1: on 3.5 jack stereo

Output Connectors:

- Video: DVI-I + HD 15F
- Audio: 5-pin screw terminal

Other:

- 1 x DB9F with 2 RS232 ports
- 1 x Jack 3.5: +12Vdc trigger
- Optional Ethernet Port 10/100BT: RJ45

Power Supply

Internal, universal, automatic, 100-250 VAC;50/60 Hz (50 W) (UL,
CSA, GS, CE), ON/OFF AC Main Switch

Supplied with

- 1 x Power cable
- 1 x Set of 3 audio 5-pin screw terminals
- 1 x DVI-VGA adapter
- 1 x HD15M-5BNC adapter cable of 0.5m (1.5ft)
- 1 x Remote control software
- 1 x User Manual

Dimensions: 19", 1U Compatible

- D 10.4" x W 19" x H 1.74"
- D 265 mm x W 482 mm x H 44 mm

Weight: 3.5 kg (7.7 lbs)

Warranty

3 year warranty on parts and labor back to factory

Specifications subject to change without prior notice

Quattro D™ by Analog Way is a **High Resolution Digital and Analog, Computer & Video Scaler Seamless Switcher**.

QTD 402 is fitted with 4 Universal A/V inputs including one DVI, and 2 outputs : 1 Analog and 1 DVI. It performs an ultra fast and smooth transition between any Video or Computer sources. It also allows a true seamless switching between one computer Input (direct) and any other Video or Computer Input.

QUATTRO D is a **High Performance State of the Art Up/Down Video and Computer Scaler**. Ready to fit the native resolution of the latest HD display devices, it provides a high quality image thanks to its high quality digital decoder, improved 3:2 and 2:2 pull down circuitry, auto-adaptative pixel by pixel 3D motion compensation, time base corrector, frame rate converter & follower.

Easy to use, **QTD 402** offers an Auto Setup function and a Powerful Auto Clock & Phase for Computers. Each input image control - brightness, contrast, color, hue, processing, aspect ratio, zoom, etc ... - can be individually set and stored in non volatile memories.

To Control Quattro D

- **RKD500-T:** Remote console with T-Bar
- **RKD500:** Remote console
- **RKD100:** Remote console
- **Axion:** High End Remote controller



Axion



RKD500-T



RKD100

Each of the 4 Inputs is fitted with a stereo audio line. The audio can either follow or break away from the Video image. **QTD 402** is fitted with a Dual RS232 Com port for Integral remote control and automatic control of other devices in the installation. Full Field upgradable firmware maintains the high value of your equipment. Upgrades are available on the **Analog Way** web site. An optional TCP/IP connection allows for remote control and/or upgrade.

This ultra compact and user friendly device is designed for high resolution A/V presentation displays, Houses of Worship, conference and boardrooms, and events.

References

> **QTD402:** QUATTRO D with RS232 com port

- **RKD500-T*:** Remote control with T-Bar
- **RKD500*:** Remote control
- **RKD100*:** Remote control

* : sold separately

Option

- **OPT-LAN:** Optional TCP/IP control interface

Cables for Quattro D

- S.Video Cables from 1.8m/6ft to 20m/66ft
- S. Video to BNC Cables of 1.8m/6ft and 5m/16ft
- RCA Cable of 1.2m/4ft
- RCA / BNC Adapter Cables
- Jack Stereo Cable of 1.2m/4ft
- Audio Stereo Cable of 1.2m/4ft
- VGA Cables from 0.4m/1.3ft to 1.8m/6ft
- VGA/BNC adapter Cables of 1.8m/6ft and 3m/10ft
- Remote Cables from 0.5m/1.6ft to 30m/100ft

ANALOG WAY

USA, Canada, South America and The Carribeans

ANALOG WAY Inc
Tel.: +1 212 269 1902
Fax.: +1 212 269 1943
Email: salesusa@analogway.com

Europe, Africa and Middle-East

ANALOG WAY FRANCE
Tel.: + 33 1 64 47 16 03
Fax.: + 33 1 64 47 14 73
Email: saleseuro@analogway.com

Asia and Asia Pacific

ANALOG WAY Pte Ltd
Tel.: + 65 62 92 58 00
Fax.: + 65 62 92 52 05
Email: salesasia@analogway.com