


# MUSICAL FIDELITY

## A3<sup>CR</sup> Power Amplifier

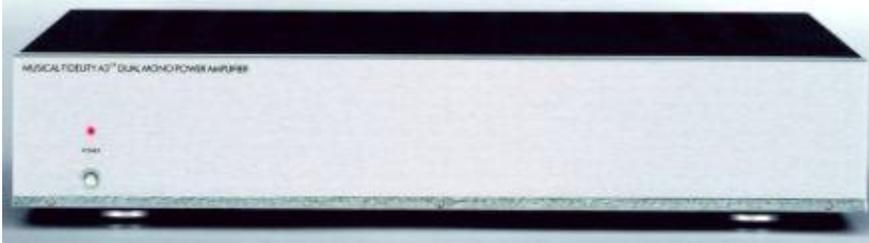

[Print This Page](#)

## OVERVIEW

### FEATURES & BENEFITS

<b>Dual mono design.</b>	Ensures perfect imaging and maximum dynamic attack. State of the art sound.
<b>Choke regulated power supply.</b>	Almost complete absence of signal or power supply 'sawtooth' residual. This leads to incredibly clean sound with extraordinary resolution of low level detail.
<b>Loop out facility.</b>	Allows easy 'daisy chaining' of A3cr for bi- or tri-amping, or home cinema use with existing setup.
<b>Very high peak current, low output impedance and exceptional stability margins.</b>	Will drive any loudspeaker with ease.

### SPECIFICATIONS

<b>Power output (0.5% distortion)</b>	120 watts per channel into 8 Ohms 210 watts per channel into 4 Ohms
<b>THD 20Hz-20KHz</b>	<0.005% at 1KHz 'A' weighted

**Frequency response** 10Hz-20KHz±0.5dB  
10Hz-100KHz±2dB

---

**Channel separation** >85dB 20Hz-20kHz

---

**Input sensitivity** 1000mW

---

**Input impedance** 31KOhm

---

**S/N ratio** > -98dB 'A' weighted (Ref 1W)  
> -120dB 'A' weighted (full output)

---

**Power consumption** 600W maximum

---

**Dimensions (mm)** Amplifier 440 x 95 x 400 (W x H x D)  
Height includes feet, depth includes  
terminals

---

**Power requirements** 100/115/230V AC 50/60Hz (factory preset)

---

**Weight** 15kg

---

**Standard accessories** IEC type mains lead

---