

Offering up to 240 Watts RMS, these premium amplifiers each feature an FM/AM digital tuner and an MP3-ready CD player. These models are designed to meet the needs of contractors; offering ample input connections such as 4 XLR MIC connectors, a 600 Ohms telephone paging input and an auxiliary 200mV input. These input specifications are complemented by a 70 Volt or 4, 8, 16 Ohm speaker outputs, a 'Music-On-Hold' output and four 70V or 25V zone outputs.




P60FACD 60 Watt P.A. Amplifier
with FM/AM Tuner & MP3-Ready CD Player

P30FACD 30 Watt P.A. Amplifier
with FM/AM Tuner & MP3-Ready CD Player

**Save rack space and money
by combining 2 sources,
a preamplifier and
power amplifier
into one chassis!**

- Four 70/25V zone outputs
- FM/AM Tuner with 8 function CD Player Unit
- 30 or 60 Watts RMS / 60 or 90 Watts Max.
- AC 115V/50/60Hz
- 60-15kHz
- 4 MIC inputs/4 XLR connections (1mV; 250 Ohms)
- 1 AUX Input (200mV 47K)
- 1 Telephone Input (0.1-1V 600 ohms)
- 4/8/16 Ohms & 25/70 V Line Outputs
- Music-On-Hold Feature
- Separate Bass & Treble Controls
- 3.5" H x 16.9" W x 11.6" D
- UL & CSA listed

Rack Mount **PBMRK2**

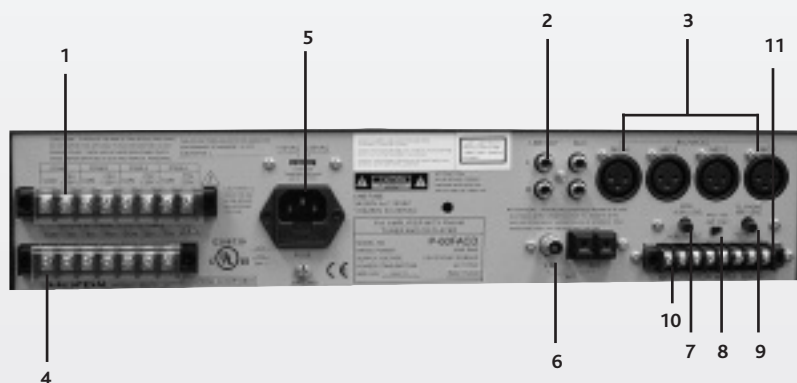

1. Zone 1-4 output terminals
2. Aux output RCA jacks
3. XLR Mic connectors
4. Screw terminal outputs
5. AC plug-in for electrical cord
6. Inputs for AM & FM Radio antennas
7. Music on hold volume adjustment
8. Override Mic #1 switch
9. Adjust paging system volume
10. Music-on-hold input
11. Telephone paging input