

### Powerchief® Maximum Value Portable Generators



PC60H

### 3,000 through 9,000 Watts


Baldor Generators are known for their quality and performance and the Powerchief® Series provides what you've come to expect in a maximum value generator. All Powerchief generators feature industrial grade engines, a Baldor generator with 3-year limited warranty, Switchless Full Pow'R and Focal Vibration System.

Catalog Number	Max. Watts	Cont. Watts	Fuel Capacity	Engine	Engine Hp	Volts (60 Hertz)	List Price	Mult. Sym.	Approx. Shp. Wgt.
PC30H	3000	2500	3.8 Qt.	Honda	5.5	120 VAC	1,345	PG	108
PC40H	4000	3500	4.6 Gal.	Honda	8.0	120/240 VAC	1,743	PG	171
PC50H	5000	4000	4.6 Gal.	Honda	9.0	120/240 VAC	1,965	PG	185
PC60H	6000	5000	4.6 Gal.	Honda	11.0	120/240 VAC	2,179	PG	211
PC60HE ①	6000	5000	4.6 Gal.	Honda	11.0	120/240 VAC	2,729	PG	217
PC90HE ①	9000	8000	4.6 Gal.	Honda	16.6	120/240 VAC	3,269	PG	270

**NOTES:** ① Batteries are not included or available on any Electric Start Models.  
Baldor reserves the right to implement specifications or design changes without notice.

**WARNING:** Do not connect generator to any building's electrical system unless a disconnect switch has been installed. Follow local and national electrical codes for proper installation.

### Receptacle Reference Drawings

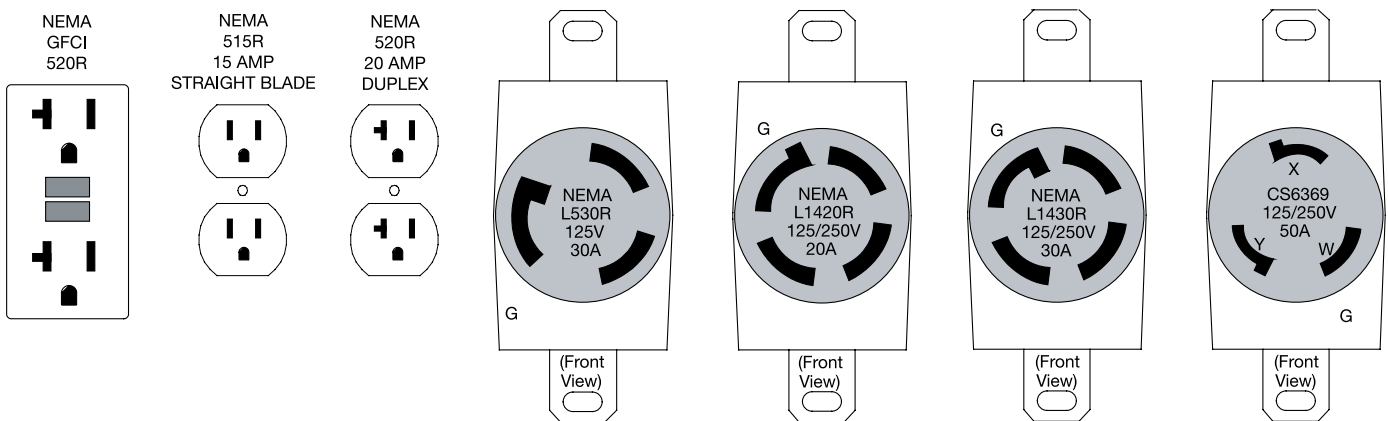

## Baldor Powerchief Portable Generator Specifications

Powerchief Model	PC30H	PC40H	PC50H	PC60H	PC60HE	PC90HE
<b>Features</b>						
Switchless Full Pow'R	—	std	std	std	std	std
AC Circuit Breakers	std	std	std	std	std	std
Low Oil Shutdown	std	std	std	std	std	std
Spark Arrestor Muffler	std	std	std	std	std	std
Extended Run Fuel Tank	—	std	std	std	std	std
Tubular Roll Cage	std	std	std	std	std	std
Neoprene Isolators	std	std	std	std	std	std
Focal Vibration System (FVS)	—	std	std	std	std	std
3-Year Warranty ②	std	std	std	std	std	std
<b>Engine Model</b>						
	Honda	Honda	Honda	Honda	Honda	Honda
Horsepower	5.5	8	9	11	11	16.6
Cylinder (S)	1	1	1	1	1	2
Displacement-CC	163	242	270	337	337	614
Starting Systems ①	Recoil	Recoil	Recoil	Recoil	12 Volt with Recoil	12 Volt with Recoil
<b>Rating</b>						
Max Rating	3000W	4000W	5000W	6000W	6000W	9000W
Rated	2500W	3500W	4000W	5000W	5000W	8000W
Volts	120VAC	120/240VAC	120/240VAC	120/240VAC	120/240VAC	120/240VAC
Amps	20.8	29.2/14.6	33.3/16.7	41.6/20.8	41.6/20.8	66.7/33.4
dbA (Ave) @ 7 meters	70	73	73	72	72	78
<b>Receptacles</b>						
Straight (515R) 120V, 15A, Single	1	—	—	—	—	—
Straight (515R) 120V, 15A, Duplex	1	—	—	—	—	—
Straight (520R GFCI) 120V, 20A, Duplex	—	1	1	1	1	1
Twist Lock (L530R) 120V, 30A	—	1	1	1	1	1
Twist Lock (L1430R) 120/240V, 30A	—	1	1	1	1	1
<b>Fuel System</b>						
Fuel Capacity (U.S. Gallons)	3.8 qt	4.6 gal	4.6 gal	4.6 gal	4.6 gal	4.6 gal
Operational Run Time/Full Load	1.5 hr	4 hr	6 hr	4 hr	4 hr	3.2 hr
Operational Run Time/Half Load	2.3 hr	7 hr	10 hr	7 hr	7 hr	5.6 hr
<b>Dimensions</b>						
Length	22"	28"	28"	28"	28"	30.5"
Width	15.75"	20.5"	20.5"	20.5"	20.5"	21.5"
Height	16.5"	22.25"	22.25"	22.25"	22.25"	21"
Weight (Net Dry)	94 lbs	162 lbs	162 lbs	187 lbs	193 lbs	258 lbs

**NOTES:** ① Batteries are not included or available on any Electric Start Models.

② Proper engine maintenance is required. Engine warranty per manufacturer.

Baldor reserves the right to implement specifications or design changes without notice.

**WARNING:** Do not connect generator to any building's electrical system unless a disconnect switch has been installed. Follow local and national electrical codes for proper installation.