

RC-2C

Wall Plate – RS-232 & IR Controller



▲ US version




▲ European version

The **RC-2C** is a 2-button controller that sends a series of RS-232 or IR commands with the push of a button. It operates serial or IR-controlled devices such as projectors, displays, and switches.

FEATURES

- 2 Multi-Color & Label Capable Buttons.
- 1 RS-232 Port - Controls a device via serial control protocols.
- 1 IR Port - Controls a device via IR protocols.
- Optional Ports - Add control ports with the PL-18 Control Port Expander.
- Memory - Up to 4 commands per macro and 4 toggling macros per button.
- Wall Plate - 1 gang EU/US.

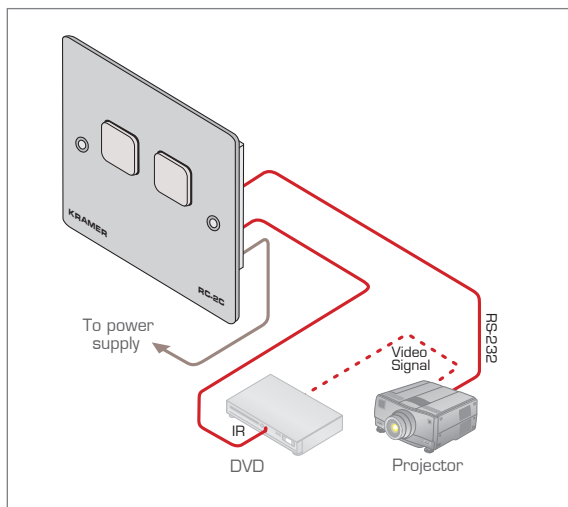

TECHNICAL SPECIFICATIONS

PORTS:	1 RS-232 on a terminal block connector; IR OUT on a terminal block connector.
POWER SOURCE:	12V DC/500mA adapter, 40mA.
DIMENSIONS:	12.4cm x 1.59cm x 7.9cm (4.88" x 0.63" x 3.12") W, D, H (US); 8.6cm x 1.59cm x 8.6cm (3.39" x 0.63" x 3.39") or 8.0cm x 1.59cm x 8.0cm (3.15" x 0.63" x 3.15") W, D, H (EU).
WEIGHT:	0.3kg (0.67lbs) approx.
ACCESSORIES:	Kramer's Windows®-based configuration software, power supply.
OPTIONS:	RS-232 9-pin D-sub port to 3-pin terminal block connector cable (C-D9F/3PM-0.6).

