



Feed-Through Bushings

Seals wall openings – Secures and protects cable
Impact-Resistant ABS Plastic Construction
Acid-resistant UV Inhibitor™ protects bushing from
ultraviolet-ray damage

- 200-982BK** RG59 Black Bushing
- 200-986BK** RG6 Black Bushing
- 200-986CL** RG6 Clear-Natural Bushing
- 200-986IV** RG6 Ivory Bushing
- 200-986WH** RG6 White Bushing
- 200-988BK** RG6-Dual Black Bushing
- 200-988CL** RG6 Dual Clear-Natural Bushing
- 200-988IV** RG6-Dual Ivory Bushing
- 200-984BK** RG6 Black Bushing with Ground and Messenger Knockouts
- 200-984CL** RG6 Clear Bushing with Ground and Messenger Knockouts
- 200-984WH** RG6 White Bushing with Ground and Messenger Knockouts
- 200-985BK** RG6-Dual Black Bushing with Ground and Messenger Knockouts
- 200-985CL** RG6-Dual Clear Bushing with Ground and Messenger Knockouts
- 200-985WH** RG6-Dual White Bushing with Ground and Messenger Knockouts



UVINHIBITOR™



UVINHIBITOR™

- 200-982BK** RG59 Black
- 200-986BK** RG6 Black
- 200-986CL** RG6 Clear
- 200-986IV** RG6 Natural-Ivory
- 200-986WH** RG6 White



- 200-988BK** RG6-Dual Black
- 200-988CL** RG6-Dual Clear
- 200-988IV** RG6-Dual Natural-Ivory



UVINHIBITOR™



UVINHIBITOR™




- 200-984BK** RG6 KO Black
- 200-984CL** RG6 KO Clear
- 200-984WH** RG6 KO White

- 200-985BK** RG6-Dual KO Black
- 200-985CL** RG6-Dual KO Clear
- 200-985WH** RG6-Dual KO White

Cable Strain-Relief Boots



Slip-On Insulated Strain-Relief Covers
Protects and supports cable to prevent breakage

- 200-970BK** RG58 Black Cable Boot
- 200-972BK** RG59 Black Cable Boot



UVINHIBITOR™

UVINHIBITOR™



- 200-970BK** RG58 Black
- 200-972BK** RG59 Black


200-974BK 2"

200-975BK 2 1/2"

Weather Boots

Tapered-Inner-Diameter Weather Boots
Suitable for Regular-Tri-Quad Shield Series 6 and 59
Coaxial Cable – Flexible Rubber Construction
UV-Inhibitor™ Ultraviolet-Ray Resistant

- 200-974BK** 2" Short Boot – Tapered I.D. 6 1/2-11mm
- 200-975BK** 2 1/2" Long Boot – Tapered I.D. 6 1/2-11mm
- 200-976BK** 2" Ribbed Short Boot – Tapered I.D. 7-12mm
- 200-978** F Weather Rubber Seal
Slips over F jacks to cover and protect connection joint
3/8" Diameter Black Rubber




UVINHIBITOR™

UVINHIBITOR™

- 200-976BK** 2" Ribbed


Box Service Enclosure

- 220-710** Weather-Resistant Service Enclosure
Provides secure enclosure for mounting splitters and terminating coax
Weatherproof HDPE Construction with UV Inhibitor for Added Durability
Padlock Eyelet for Added Security
Generous 3/4" x 1/2" Entrance Slots
Accommodates multiple cables and allows for future expansion
Removable Cover for Easy Access
Mounts flat or on a pole using screw, cable tie or U-bolt slots
6 1/4"(W) x 8 3/4"(H) x 2 3/4"(D)



UVINHIBITOR™

- 200-978**

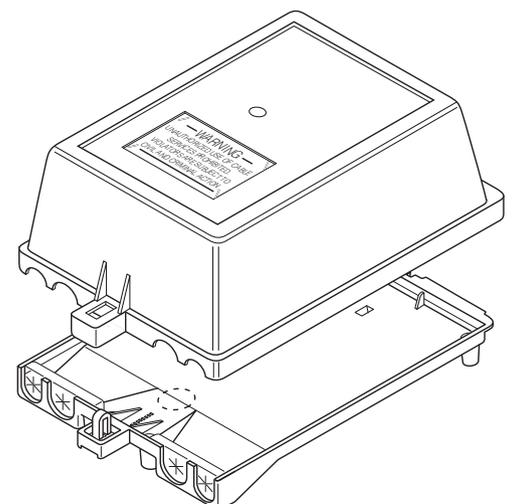

- 220-710**