



Plenum Category-5E Cable

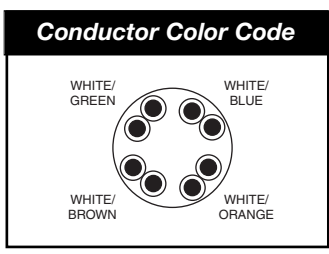



300-793BL Blue
300-793GY Grey

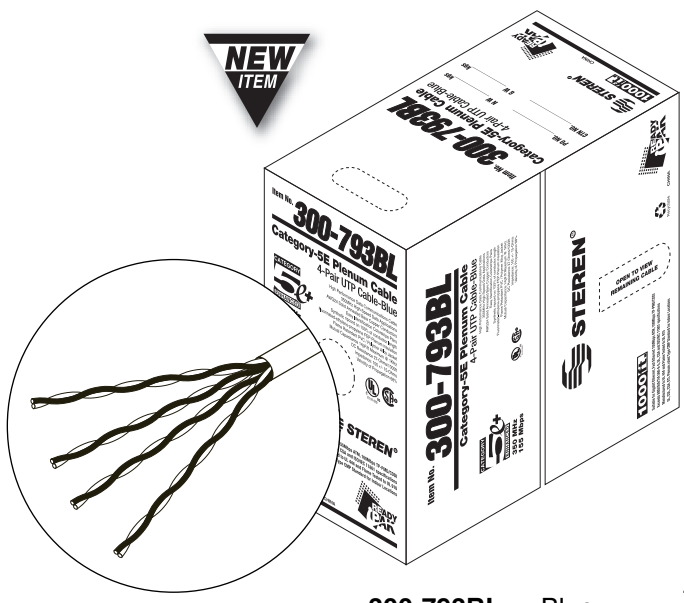

Category-5E Unshielded Twisted Pair (UTP) Cable High-Performance Data Communications Cable Suitable for 350 MHz High-Speed Data Applications Suitable for Gigabit Ethernet, Fast Ethernet, 155Mbps ATM, and 100Mbps TP-PMD/CDDI 4-Pair – Easily Identified Color-Striped Pairs AWG24 Solid Annealed Copper Conductors Excellent Attenuation and Crosstalk Characteristics Impedance: $100\Omega \pm 15\%$ @ 1-100MHz DC Resistance $28\Omega/1000'$ Mutual Capacitance 14pF/ft Nominal Velocity of Propagation 68% PVC Polymer Compound Jacket Manufactured and Flame Tested to UL 444/910 Fluorinated-Ethylene-Propylene Plenum Insulation Flame Retardant – Type CMP, CMR Suitable for Indoor and Outdoor Installations Exceeds ANSI/EIA/TIA 568-A-5, UL, CSA and ISO/IEC 11801 specifications UL/cUL, CSA, ETL Listed – Supplied in 1000' Pull Boxes

- NEW ▶ 300-793BL** 1000' Blue CAT5E Plenum Pull-Box
- NEW ▶ 300-793GY** 1000' Grey CAT5E Plenum Pull-Box

Fast Media™ CAT6 Cable

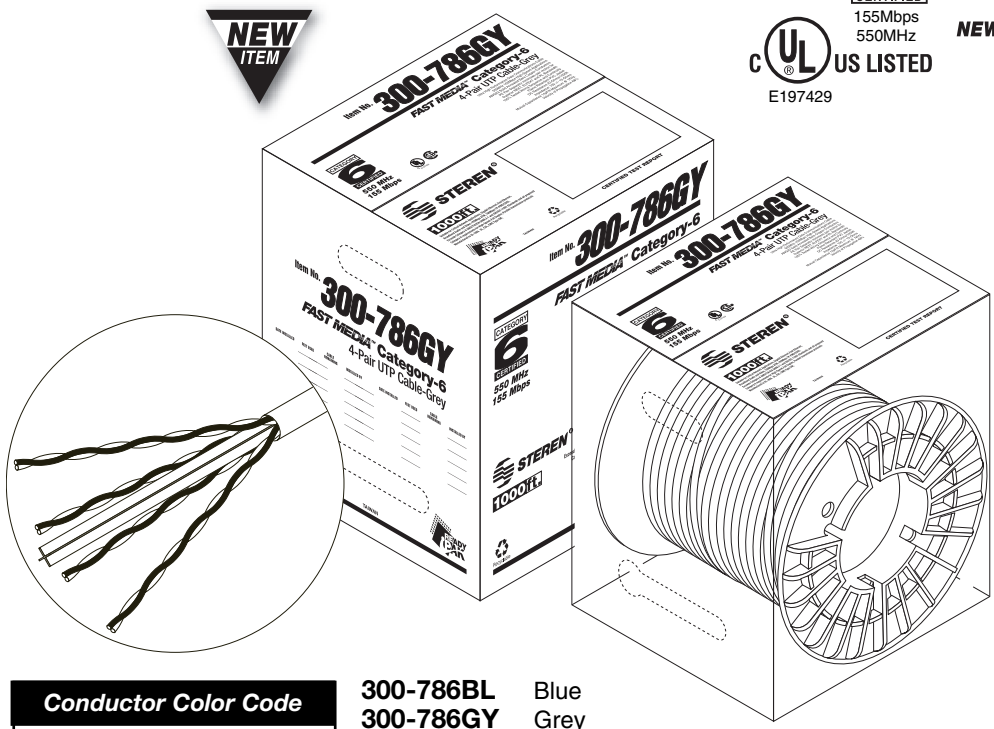

300-786BL Blue
300-786GY Grey

Category-6 Unshielded Twisted Pair (UTP) Cable Ultra-High-Performance Data Communications Cable Suitable for 550MHz High-Speed Applications, Critical Network Applications, Gigabit Ethernet, Fast Ethernet, Broadband Audio and Video, 155Mbps ATM, and 100Mbps TP-PMD/CDDI, NEXT, ELFEXT and RL Bandwidth Compliant 4-Pair – Easily Identified Color-Striped Pairs PE pair separator minimizes pair motion AWG23 Solid Annealed Copper Conductors 100% Tested Wiring Sequence and Continuity Excellent Attenuation and Crosstalk Characteristics Impedance $100\Omega \pm 15\%$ – DC Resistance $23\Omega/1000'$ Mutual Capacitance 14pF/ft Maximum @ 1kHz Velocity of Propagation 68% Blue or Grey PVC Jacket Flame Retardant – Type CM CMH, CMR Suitable for Indoor Installations Exceeds Category-6 ANSI/TIA/EIA 568B.2-1 and ISO/IEC 11801 standards and all proposed Category-6 requirements for high-speed, full duplex, parallel transmission protocols UL/cUL 1685, CSA, ETL Listed Supplied in 1000' Reel-in-a-Box

- NEW ▶ 300-786BL** 1000' Blue CAT6 Reel-Box
- NEW ▶ 300-786GY** 1000' Grey CAT6 Reel-Box