




200-990 35mm
200-994 44mm

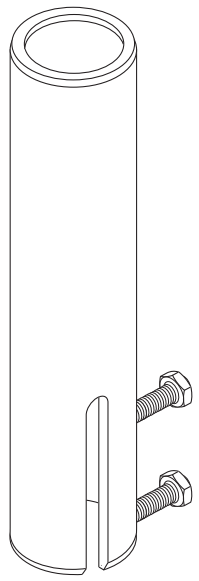


200-904

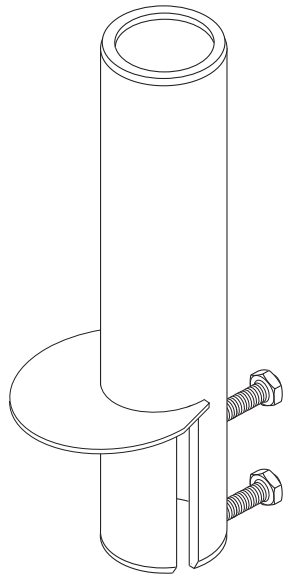


200-908

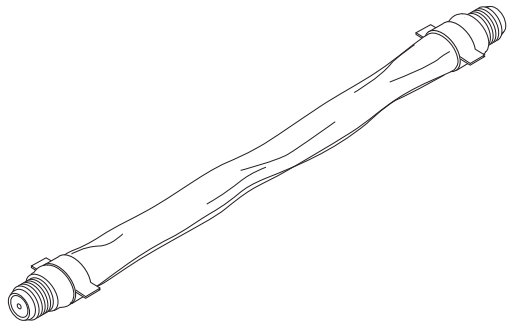

205-090WH 8-inch



200-989



200-991

DSS Quick Pipe Adapters

8"-Length Pipe Adapters for Satellite Dishes
Adapts C-Band and PrimeStar pipes for 18" dishes
Powder-Coated Durable Finish

- 200-904** 1⁵/₈" DSS Easy-Install Pipe Adapter
Suitable for 2⁷/₈" to 4¹/₂" ID Pipes
- 200-908** 1⁵/₈" DSS Easy-Install Pipe Adapter with
Protective Water-Cover Lip
Suitable for 2⁷/₈" ID Pipes
Powder-Coated Durable Finish, Length 8"

Dish Positioning Compass

Direction Finding Compass – Plastic
DSS Installation-Kit Component
Used in Initial Dish Positioning

- 200-990** 35mm Direction Finding Compass
- 200-994** 44mm Plastic Direction Finding Compass

F-F Flat Through Cable

205-090WH 8" White Flat F-F 75Ω Jumper
Cable Thickness ³/₃₂"
Eliminates drilling through walls and
conveniently runs under or
over windows and doors
Mounting Adhesive-Taped Back
Nickel-Plated Brass F Connectors
Soft Waterproof White PVC Jacket

Satellite Dish Levels

10x30mm Satellite Dish Levels Used in Installation

- 200-989** 10 x 30mm Single Satellite Dish Level
- 200-991** 10 x 30mm Dual Satellite Dish Level
Plastic Housing with Underside Magnet