

# Coaxial Cable

Siamese and Single constructions for Satellite TV, Direct TV, Cablevision, and CCTV Control Cable (Closed Circuit TV).  
All Cables are U/L Listed



## Coaxial Cable

- Home Controls
- Security
- Cable TV/Internet
- Pay-Per-View
- Satellite Delivery
- Security Pan & tilt

### Siamese RG 6/U Quad Shield 75 Ohm Foil & Braid




Catalog Number	RG Type	Cond. Size	Dielectric O.D.	Shield	Nom. O.D.	Nom. Imp.	Vel. Prop	Nom. pF/Ft.	MHz	Atten. dB/100'
1564 DUAL	Quad Shield 6/U	18 Solid BC	Foam Poly. .180	2-Foil Shlds & 1-60%, 1-40% Braids	.295	75	82%	16.2	100	2.05
					x				200	2.83
					.615				1000	6.8
									1.450	8.04
								2.200	9.50	

### Siamese RG 6/U Types 75 Ohm Foil & Braid



Catalog Number	RG Type	Cond. Size	Dielectric O.D.	Shield	Nom. O.D.	Nom. Imp.	Vel. Prop	Nom. pF/Ft.	MHz	Atten. dB/100'
1563 2.2GIG DUAL	6/U	18 Solid BC	Foam Poly. .180	100% Foil & 60% Alum.	.275	75	82%	16.2	100	2.05
					x				200	2.83
					.575				1000	6.8
									1.450	8.04
								2.200	9.50	

### RG 59/U Types 75 Ohm Copper Braid with 18/2

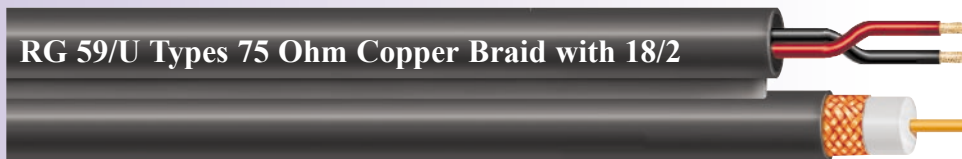

Catalog Number	RG Type	Cond. Size	Dielectric O.D.	Shield	Nom. O.D.	Nom. Imp.	Vel. Prop	Nom. pF/Ft.	MHz	Atten. dB/100'
1526	59/U with 18/2	22 Solid BC	Foam Poly. .140	B.C. 95% Braid	.242	75	78%	16.3	100	3.0
					x				200	4.5
					.430				400	6.6
									900	10.0

### RG 6/U Types 75 Ohm Copper Braid

Catalog Number	RG Type	Cond. Size	Dielectric O.D.	Shield	Nom. O.D.	Nom. Imp.	Vel. Prop	Nom. pF/Ft.	MHz	Atten. dB/100'
1531	6/U	18 Solid BC	Foam Poly. .180	B.C. 95% Braid	.275	75	78%	16.5	100 200 400	2.1 3.9 4.6

### RG 59/U Type 75 Ohm Copper Braid

Catalog Number	RG Type	Cond. Size	Dielectric O.D.	Shield	Nom. O.D.	Nom. Imp.	Vel. Prop	Nom. pF/Ft.	MHz	Atten. dB/100'
1525	59/U	22 Solid BC	Foam Poly. .140	B.C. 95% Braid	.242	75	78%	16.3	54-60 82-88 174-180 210-216	2.4 3.1 4.0 4.3
1510/95	59/U	20 Solid BC	Foam Poly. .140	B.C. 95% Braid	.242	75	78%	16.3	54-60 82-88 174-180 210-216	2.4 3.1 4.0 4.3

### RG 6/U Types 75 Ohm Foil & Braid

Catalog Number	RG Type	Cond. Size	Dielectric O.D.	Shield	Nom. O.D.	Nom. Imp.	Vel. Prop	Nom. pF/Ft.	MHz	Atten. dB/100'
1561 2.2GIG	6/U	18 Solid BC	Foam Poly. .180	100% Foil & 40% Alum.	.275	75	82%	16.2	100 200 1000 1.450 2.200	2.05 2.83 6.8 8.04 9.50
1563 2.2GIG	6/U	18 Solid BC	Foam Poly. .180	100% Foil & 60% Alum.	.275	75	82%	16.2	100 200 1000 1.450 2.200	2.05 2.83 6.8 8.04 9.50

### RG 6/U Quad Shield Type 75 Ohm

Catalog Number	RG Type	Cond. Size	Dielectric O.D.	Shield	Nom. O.D.	Nom. Imp.	Vel. Prop	Nom. pF/Ft.	MHz	Atten. dB/100'
1564 2.2GIG	Quad Shield 6/U	18 Solid BC	Foam Poly. .180	2-Foil Shlds & 1-60%, 1-40% Braids	.295	75	82%	16.2	100 200 1000 1.450 2.200	2.05 2.83 6.8 8.04 9.50