



SourceFlex™ System


Model SAS-SM8

Sonic Mushroom™

Installation/Operation




EN55103-1 E1-E5; EN55103-2 E1-E4
Typical Performance reflects product at publication time exclusive of EMC data, if any, supplied with product. Specifications are subject to change without notice.

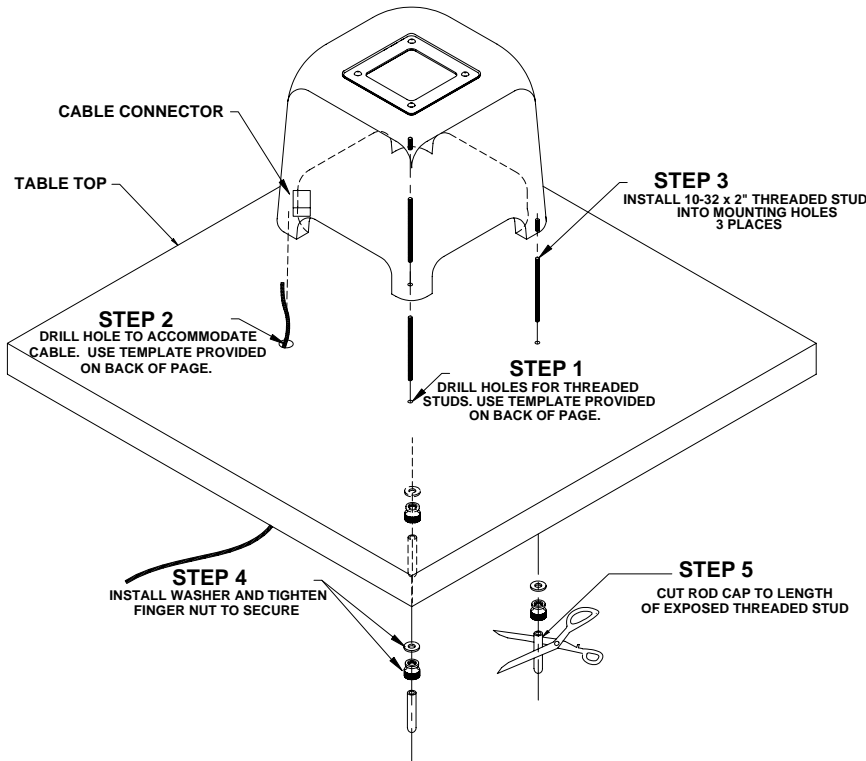

Standard SAS-SM8 mounting using SAS-MK mounting kit.

Connect cable conductors to the terminal block on the SAS-82 or SAS-8C controller.

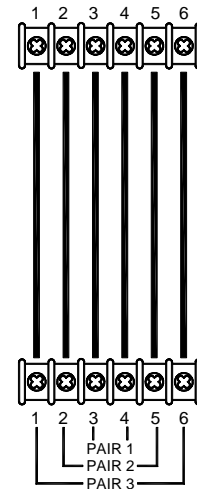

Connect cable conductors to the terminal block on the SAS-SM8.

TYPICAL PERFORMANCE

Input terminals driven by SAS-8C or SAS-82 output:	Balanced audio, display data, switching logic, power
Frequency Response:	Maximum intelligibility on table top installation
SPL:	85 dBa @ 1 meter omnidirectional
Controls:	Momentary channel select, volume ramp UP, volume ramp DOWN
Volume Adjustment Range:	40 dB
Ramp Rate:	5 seconds nominal for 40 dB
Display:	7-segment red LED ("0" = OFF or paging, "1" through "8" = selected channel)
Control buttons:	Moisture sealed user-replaceable polycarbonate
Construction:	Industrial quality tamper-resistant aluminum/steel
Mounting:	3-point mounting in tabletops up to 1.2" (3.0cm)
Color:	RDL Silver Leopard (adapts to color of table, masks fingerprints)
Power Requirement:	24 to 33 Vdc @ 225 mA, Ground-referenced
<i>Note: Current requirement is increased by the load connected. For example, 450mA is required when two SM8s are connected.</i>	
Interconnection Cable:	Connect to SAS-8C or SAS-82 output using 22 gauge solid phone wire
Dimensions:	Height: 4.7 in 11.9 cm
	Length: 5.4 in 13.7 cm
	Depth: 5.4 in 13.7 cm