




- 200-057** F81 1GHz Red Insulator
- 200-058** F81 2.5GHz Blue Insulator
- 200-059** F81 3GHz Green Insulator

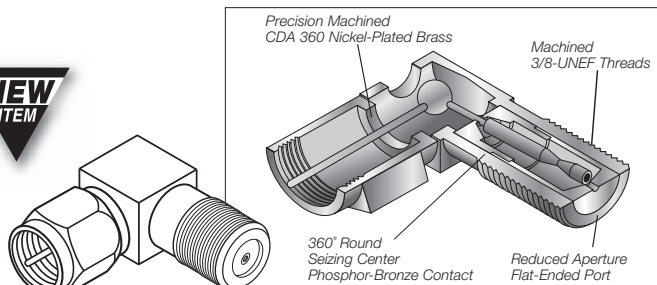


**200-106** 2.5GHz




**200-060**




**200-063**



**200-110**



**200-170**



**200-196**

## F Series Premium Adapters

High-Performance F Splices and L-Adapters Engineered for High-Frequency Broadband Network and Distribution System Applications to 3GHz Precision Machined CDA360 Brass Construction Thick Nickel-Plated for Corrosion-Free Service Life Flat-ended small-aperture F ports meets SCTE IPS-SP-407 for improved contact and high return loss 360° round seizing center contact provides high spring-tension for repeat insertions High 8-Ampere DC Continuous Current Capacity Insertion Loss 0.20dB max.

- 200-057** 1 GHz F81 Splice – 1" Long  
Red Insulator – Phosphor Bronze Contact  
Return Loss -20dB minimum @ 1GHz
- 200-058** 2.5 GHz F81 Splice – 1" Long  
Blue Insulator – Phosphor Bronze Contact  
Return Loss -24dB minimum @ 2.5GHz
- NEW ▶ 200-059** 3 GHz F81 Splice – 1" Long  
Green Insulator – Beryllium-Copper Pin  
Return Loss -30dB minimum @ 3GHz
- NEW ▶ 200-106** 2.5 GHz F Angle Adapter  
Blue Insulator – Phosphor Bronze Contact  
Return Loss -24dB minimum @ 2.5GHz

## RCA Coaxial Connectors

- 200-060** RCA Plug Crimp RG59 1/4" Ring
- 200-063** RCA Plug Solder RG59 Premium Gold Plated – Spring Strain Relief

## RCA Coaxial Adapters

- 200-110** F Jack to RCA Plug
- 200-170** BNC Jack to RCA Plug
- 200-196** UHF Jack to RCA Plug