



Digital Multimeters

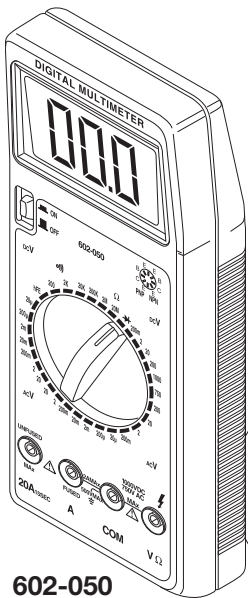


Blister-Packaged

- Functions:
- AC/DC Voltage
 - AC/DC Current
 - Resistance
 - Diode-Continuity Beeper
 - Transistor Tester




602-050

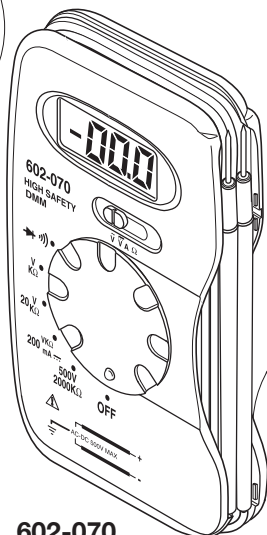

Blister-Packaged Wrap-Around Test Leads


- Functions:
- AC/DC Voltage
 - DC Current
 - Resistance



602-070


602-050 3¹/₂-Digit DMM Multitester
 3/4" High-Contrast LCD Display
 32-Position Rotary-Range Switch
 Diode and 50Ω Continuity Beeper
 Overload Protected
 Transistor Tester 10μA 3.4V
 Voltage 200mV-1000V DC ±0.5%
 Voltage 200mV-700V AC ±0.8%
 Input Impedance 10MΩ
 Current 20μA-10A DC ±0.5%
 Current 20μA-10A AC ±1%
 Resistance 200Ω-20MΩ ±0.5%
 High-Visibility Yellow Case
 Includes 30" test leads, 9V battery
 3 1/4"(W) x 6 3/4"(H) x 1 1/8"(D)

602-070 3¹/₂-Digit Pocket DMM
 3/4" LCD Display
 Diode and 50Ω Continuity Beeper
 Overload Protected
 Voltage 2-500V DC ±0.5%
 Voltage 200-500V AC ±1.2%
 Input Impedance 1MΩ
 Current 200mA DC ±1.5%
 Resistance 2K-2MΩ ±1.0%
 18" Wrap-Around Test Leads
 Includes leatherette pouch, 9V battery
 2 3/4"(W) x 4 3/4"(H) x 3/4"(D)

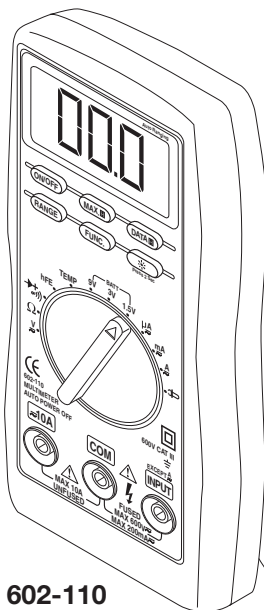


Display-Boxed

- Functions:
- AC/DC Voltage
 - AC/DC Current
 - Resistance
 - Diode-Continuity Beeper
 - Transistor Tester
 - Temperature




602-110

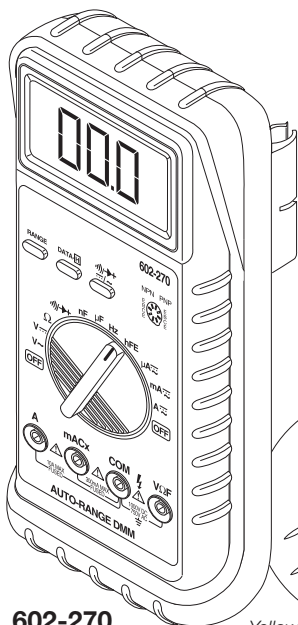

Blister-Packaged Probe Holders

- Functions:
- AC/DC Voltage
 - AC/DC Current
 - Resistance
 - Capacitance
 - Frequency
 - Diode-Continuity Beeper
 - Transistor Tester



602-270

Yellow Injection Molded Tuff Case

NEW ▶ 602-110 3-Digit Autorange Digital Multimeter
 Digital Backlit LCD Display
 Display and Audio Continuity Test
 Auto Range – Data Hold
 Diode Test – Battery Test
 Voltage 200m-600V DC ±0.7%
 Voltage 200m-600V AC ±0.8%
 Curr. DC 200μ-200mA ±1.2%, 10A ±2.0%
 Curr. AC 200μ-200mA ±1.5%, 10A ±3.0%
 Resist. 200Ω-2MΩ ±1.2%, 20MΩ ±2.0%
 IEC1010-1 Cat III 600V Compliant
 18" Test Leads – Includes AAA batteries
 3"(W) x 6 1/4"(H) x 1 13/4"(D)

602-270 3³/₄-Digit Auto-Range DMM
 5/8" High Contrast LCD Display
 33-Segment Fast Analog Bargraph
 Diode and 50Ω Continuity Beeper
 Manual Range-Override Switch
 Overload Protected – Data Hold Switch
 Transistor Tester 10μA 3.2V
 Frequency 32.6-200kHz ±1.2%
 Capacitance 326nF-32.6μF ±3.0%
 Voltage 326mV-1000VDC ±0.3%
 Voltage 326mV-750VAC ±0.8%
 Input Impedance 10-100MΩ
 Current 326μA-10A DC/AC ±1.5%
 Resistance 326Ω-32.6MΩ ±0.8%
 Yellow Injection Molded Tuff Case
 36" 1500V Double-Insulated Test Leads
 Includes tilt stand, holster, 9V battery
 3 3/4"(W) x 7 3/4"(H) x 1 1/2"(D)