




**CATV Amplifiers**

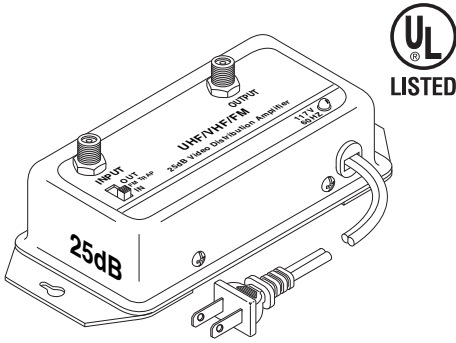


200-651 25dB

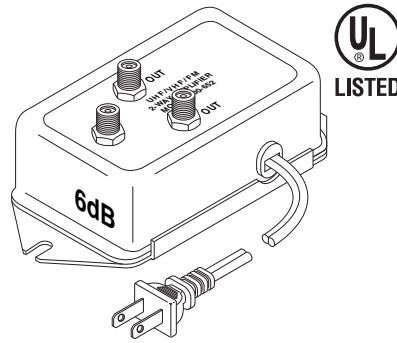


200-652 6dB

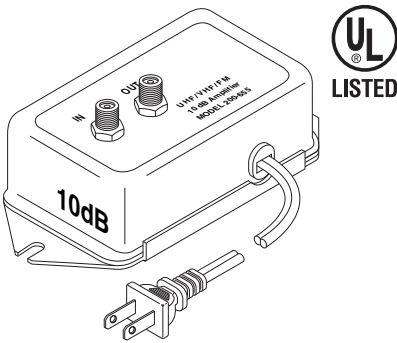


200-656 10dB

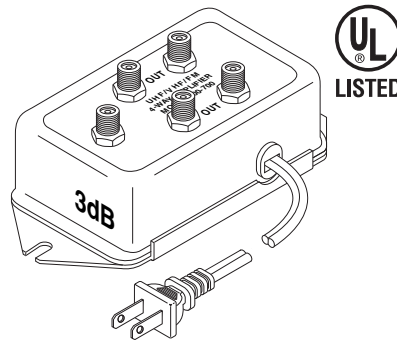

200-700 3dB

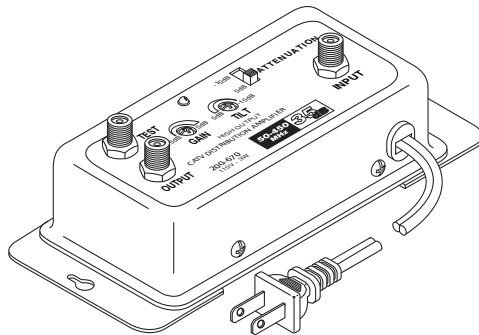

200-670 35dB

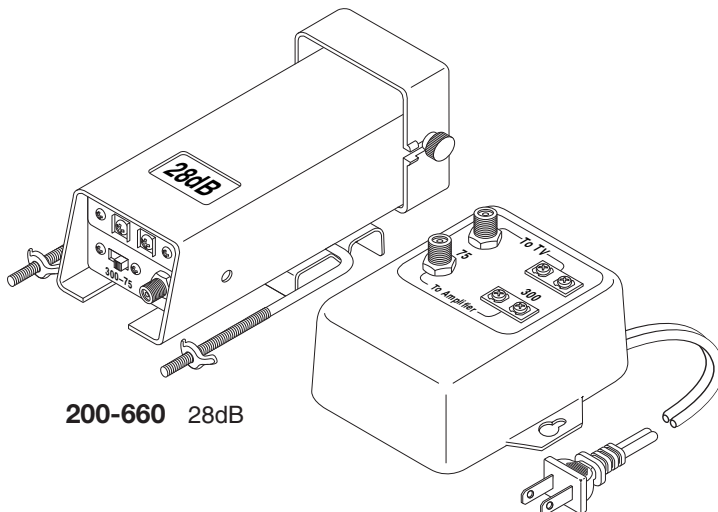

200-660 28dB

UHF/VHF/FM Broadband Amplifiers  
Low-Noise – Heavy-Gauge Shielded Case  
Bandwidth 54-890MHz – Impedance 75Ω  
117 VAC 60Hz Power Source – UL Listed

- 200-651** 25dB Broadband Amplifier  
Switchable FM Attenuation Trap  
FM Rejection-20dB at 88-108MHz  
VHF Gain 25dB – UHF Gain 21dB  
VHF Noise 6dB – UHF Noise 8dB  
Flatness Response ±2dB  
On-Off Indicator Light  
6<sup>5</sup>/<sub>8</sub>"(W) x 1<sup>3</sup>/<sub>8</sub>"(H) x 3<sup>1</sup>/<sub>8</sub>"(D)
- 200-652** 6dB 2-Output Broadband Amplifier  
VHF Gain 6dB – UHF Gain 3dB  
Flatness Response ±2dB  
3<sup>1</sup>/<sub>2</sub>"(W) x 1<sup>1</sup>/<sub>2</sub>"(H) x 2<sup>1</sup>/<sub>4</sub>"(D)
- 200-656** 10dB Broadband Amplifier  
VHF Gain 10dB – UHF Gain 7dB  
Flatness Response ±2dB  
3<sup>1</sup>/<sub>2</sub>"(W) x 1<sup>1</sup>/<sub>2</sub>"(H) x 2<sup>1</sup>/<sub>4</sub>"(D)
- 200-700** 3dB 4-Output Broadband Amplifier  
VHF Gain 3dB – UHF Gain 0dB  
Flatness Response ±2dB  
3<sup>1</sup>/<sub>2</sub>"(W) x 1<sup>1</sup>/<sub>2</sub>"(H) x 2<sup>1</sup>/<sub>4</sub>"(D)

**CATV Distribution Amplifier**

- 200-670** 35dB CATV Distribution Amplifier  
Bandwidth 47-450MHz  
Band Flatness ±1.5dB  
Input Return Loss 14dB  
Slope Control Adjustment 0-10dB  
Gain Control Adjustment 0-15dB  
Test Port -20dB  
Shielded Metal Housing  
6<sup>5</sup>/<sub>8</sub>"(W) x 1<sup>3</sup>/<sub>8</sub>"(H) x 3<sup>1</sup>/<sub>8</sub>"(D)

**Mast-Mount Video Amplifier**

- 200-660** 28dB Mast-Mount Signal Booster  
Low-Noise – Lightning Protection  
VHF Gain 28dB – UHF Gain 22dB  
54-890 MHz UHF-VHF FM  
117VAC 60Hz Power Supply  
Input Impedance 75-300Ω  
Output Impedance 75-300Ω  
Booster 2"(W) x 5<sup>1</sup>/<sub>4</sub>"(H) x 1<sup>1</sup>/<sub>2</sub>"(D)  
Power Supply 3"(W) x 1<sup>5</sup>/<sub>8</sub>"(H) x 4"(D)