



RC-63AL/RC-63A

6-Button Room Controllers with Analog Volume Knob

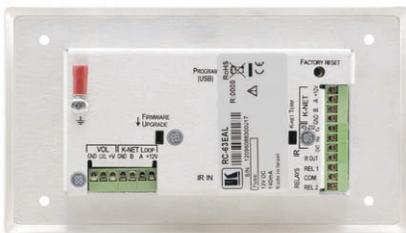

▲ RC-63AL (US versions)

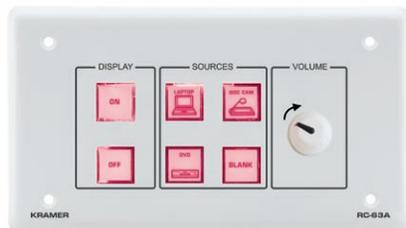


◀ RC-63A (European versions)

The **RC-63AL** and **RC-63A** are 6-button room controllers with an analog volume knob for multimedia rooms. The units function either as standalone controllers or as part of the SummitView™ system to control audio components, video components and other room facilities such as lights and screens.

FEATURES

- **6 Programmable Buttons** - Color, back-lit & label capable.
- **Group Labels** - Programmable back-lit LCD group labels (RC-63AL); printed group labels (RC-63A).
- **Analog 10kΩ Volume Control Knob**.
- **Macro Capability** - Carries out multiple commands with a single press of a button.
- **Command Banks** - Each button offers multiple layers of functions for alternate behavior, toggle functionality, and more.
- **Internal Clock** - Schedules recurring tasks, defines the system shutdown timer for economic operation, and more.
- **1 USB** - For programming.
- **1 Bidirectional RS-232** - Controls AV equipment such as projectors, LCD and PDP displays, power amplifiers, switchers and scalers.
- **1 IR Output** - Additional control port for AV equipment.
- **IR Learning Function** - Learns commands from IR remotes.
- **2 Relay Contact Closure Ports** - Conveniently controls other room items related to the AV system such as raising and lowering drapes, the screen or the projector.
- **2 K-NET™ Connectors** - Connects to other control panels or a central control processor.
- **K-NET™ Control Channel** - Provides power and control data to the wall plate controllers over a single cable.
- **Wall Plate Sizes** - RC-63A/RC-63AL - 2 gang US, RC-63EA/RC-63EAL - 2 gang EU. Available in white.

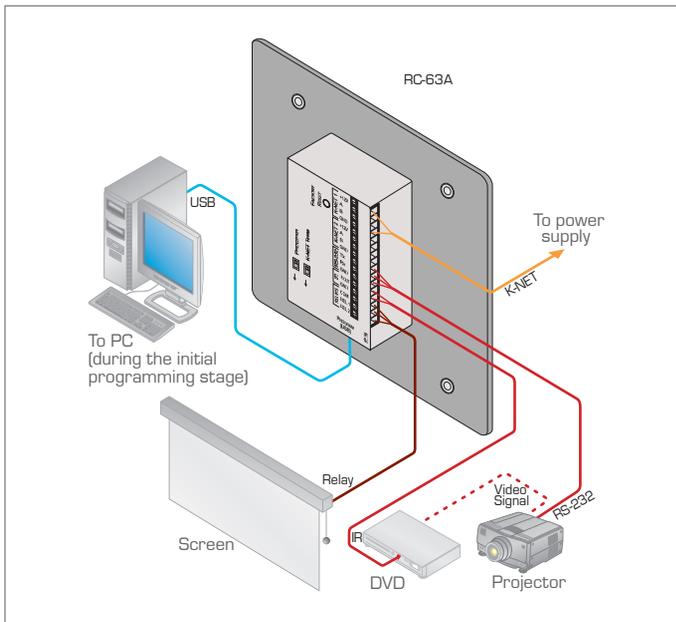

TECHNICAL SPECIFICATIONS

PORTS:	1 RS-232 on terminal block connectors; 2 K-NET™ on terminal block connectors; 1 USB port.
OUTPUT:	2 relays on terminal block connectors (36V AC or DC, 2A, 60V AC maximum on non-inductive load); 1 IR emitter on terminal block connectors.
POWER SOURCE:	12V DC, 100mA.
FUSE:	500mA, F5MD 2920.
ADAPTER:	SummitView™ kits: 12V, 5A; independent: 12V, 500mA.
DIMENSIONS:	11.4cm x 2.6cm x 11.4cm (4.49" x 1.02" x 4.49") W, D, H.
WEIGHT:	0.14kg (0.31lbs) approx.
ACCESSORIES:	Power supply, USB cable 0.91m (3ft), screwdriver, Windows®-based Kramer control software.
OPTIONS:	Kramer 3.5mm to IR Emitter Control Cable (C-A35/IRE-10); 15m and 20m IR emitter extension cables.

