

HUSKEY™ II AC

High Power for Close Quarters

MODEL	C4-26 AC	
TYPE	Electric	
SPEED ¹	10 mph	16 km/hr
RANGE ²	30 miles	48.3 km
DRAW BAR PULL ³		
ULTIMATE	3,000 lbs	13.3 kN
NORMAL	600 lbs	2.7 kN
TOWING CAPACITY ⁴	30,000 lbs	13,610 kg
BATTERY COMPARTMENT	32" L x 18.5" W x 24" H	
	81.2 cm x 46.9 cm x 60.9 cm	
VOLTAGE	48 volts	
TURNING RADIUS	74.5 inches	189 cm

¹ Unloaded maximum speed

² Unloaded on dry clean level concrete or equivalent

³ Per ANSI B56.9 Standard

⁴ Based on:

- Dry clean level concrete or equivalent
- 600 lbs normal draw bar pull
- Trailer rolling drag = 20 lb per 1,000 lb towed



Vehicles may be shown with optional equipment

Tough and Dependable Product Solutions

The new generation Huskey™ II AC builds on the reliable history of the original Huskey™.

The Huskey™ II AC combines high power towing in a compact maneuverable tow tractor, while maintaining operator comfort and safety.

For most trailer systems, the Huskey™ II AC can tow up to 30,000 pounds gross towed load: impressive for a tractor only 39 inches wide and 93 inches long (including hitch). Towing power comes from an enclosed 17 hp AC motor coupled to the Taylor-Dunn GT drive.

This tractor is easy to maneuver with cushion grip steering wheel and 74.5 inch turning radius. The high ratio steering gear makes controlling the tractor effortless.

The Huskey™ II AC comes equipped with many standard features for operator comfort such as full 4-wheel suspension, remote lever to release the hitch, suspension seat, cushion grip steering wheel, and cup holder. Additional standard features such as high visibility driving position, lighting (headlight with dual brake, tail, and reverse lights), automatic parking brake, emergency stop switch, multifunction dash display, and full perimeter steel plate protection are provided for the safety of the driver and others. Options allow configurations to meet various applications. Additionally, Taylor-Dunn will factory modify vehicles to meet specific requirements; thus, maintaining OSHA compliance.

With over 160,000 vehicles in service and over 55 years of experience in the industry, Taylor-Dunn products are the best way to go about your business.



TAYLOR-DUNN®
Commercial and Industrial Vehicles Since 1949

The best way to go about your business

PERSONNEL CARRIERS



Aristocrat



Roadmaster

BURDEN CARRIERS



Taylortruck



Loadmaster



Model B Series



Electruck



Maintenance Expediter



Stepsaver



Stockchaser

TOW TRACTORS



Towmaster



Mule




TT 316



Model E



Huskey

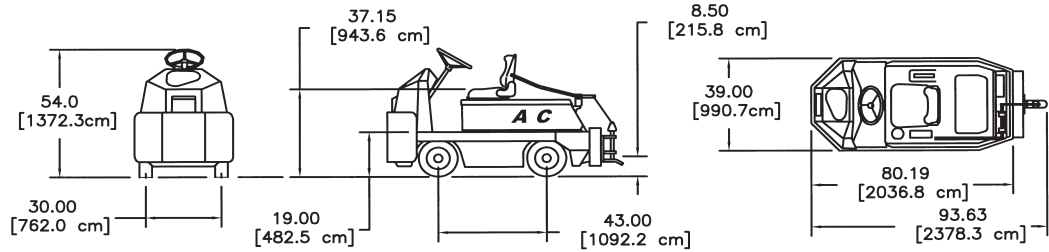

TURNING RADIUS: 74.5 Inches [189 cm] INTERSECTING ASILE: 70 Inches [178 cm]

HUSKEY™ II AC SPECIFICATIONS

Product Line	C4-26 AC	
Unit Weight (less battery)	2,700 lbs	1,225 kg
Towing Capacity	30,000 lbs	13,610 kg
Draw Bar Pull: Ultimate	3000 lbs	13.3 kN
Normal	600 lbs	2.7 kN
Battery Compartment Size: Lift Out Battery	32" L x 18.5" W x 24" H	81.2 cm x 46.9 cm x 60.9 cm
Left Side Extract	32" L x 18.5" W x 21.25" H	81.2 cm x 46.9 cm x 54 cm
Battery Weight Range	1,200 – 1,500 lbs	544 – 680 kg
System Voltage	48 volts	
Drive Axle	GT, Automotive Type Differential	
Transmission	Helical Gears in Oil Bath	
Motor	17 hp AC, Enclosed	
Tires	4.00 x 8 Soft Solid, Traction Tread	
Brakes	4 Wheel Hydraulic Disc, Automatic Parking Brake	
Steering	24:1 Ratio Automotive Type	
Frame	3/16-inch Thick Steel Chassis with 1/2-inch Thick Full Perimeter Steel Plate Protection, Rear Traction Weight	
Suspension	Coil Springs Front and Rear with Shock Absorbers	
Color	Two Tone, Red Cowl and Battery Lid, Gray Chassis	
Seat	Adjustable, Suspended	
Controller	AC Solid State, Hi-Lo Speed Selector	
Instrumentation	Combination Display (battery status indicator, hour meter, fault code display, speedometer), Seat Interlock Switch, Emergency Stop Switch	
Lighting	Headlight with Dual Tail, Brake, and Reverse Lights Powered by Fully Isolated DC-DC Converter	
Hitch	Spring Loaded E-Type with Release Lever at Left Side of Driver	
Conformance	Type E OSHA 1910.178, ANSI B56.9	

HUSKEY™ II AC OPTIONAL FEATURES

- Left Side Battery Extract Frame
- Cab
- Hitches
- Governed Maximum Speed
- Extra Wide Traction Tires
- Factory Customization
- Maintains OSHA compliance
- Contact your local dealer for details



2114 West Ball Road, Anaheim, CA 92804 • (714) 956-4040 • FAX (714) 956-3130
Toll Free (800) 688-8680 Visit our website: www.taylor-dunn.com

Specifications, standard equipment, accessories and modifications subject to change without notice.