

STEPSAVER™

Designed For Versatile Applications

MODEL	SS5-34	SS5-36
TYPE	Electric	Electric
SPEED (MAX MPH)	10 (16 kmph)	10 (16 kmph)
RANGE (MILES)	20 (32 km)	20 (32 km)
LOAD CAPACITY (lbs)	500 (227 kg)	600 (272 kg)
TOWING CAPACITY (lbs)	Consult Factory	Consult Factory
BED SIZE (W"xL") (INCHES)	27"x17"	30"x19"
VOLTAGE	24	24
TURNING RADIUS (INCHES)	75" (190 cm)	75" (190 cm)

Based on Standard Configuration

*Typical capacity: Actual load capacity depends on application and vehicle configuration



Tough and Dependable Product Solutions

Vehicles may be shown with optional equipment

These Stepsavers provide personnel transportation for executive, supervisors, security, maintenance, mail carriers and other workers whose job keeps them on the go.

Stepsaver's versatile design allows you to convert the vehicle from personnel carrier to burden carrier in a matter of seconds. This vehicle can carry up to two people or 600 lbs. of load on the job site.

With its three wheel short turning radius design, Stepsaver can maneuver dependably around warehouses, industrial complexes, resorts and hotels, shopping malls, hospitals and other commercial complexes.

It's all welded steel unitized body and frame is built to last for years of use. Modularized control system design provides ease of maintenance on all electrical systems. Tiller loop steering, 10 mph speed, and on-board charger provide safety, efficiency and convenience during daily operation.

With more than 150,000 vehicles in service and over 50 years of experience in the industry, Taylor-Dunn® products are the best way to go about your business.



- 75" Turning Radius
- Load Capacity Up To 600 lbs.
- Towing Capacity Up To 4,250 lbs.
- Zero Emissions



TAYLOR-DUNN®
Commercial and Industrial Vehicles Since 1949

The best way to go about your business

PERSONNEL CARRIERS



Aristocrat



Roadmaster

BURDEN CARRIERS



Taylortruck



Loadmaster



Model B Series



Electruck



Maintenance Expediter



Stepsaver



Stockchaser

TOW TRACTORS



Towmaster



Mule



Pullmaster




Model E



Huskey

SS5-36

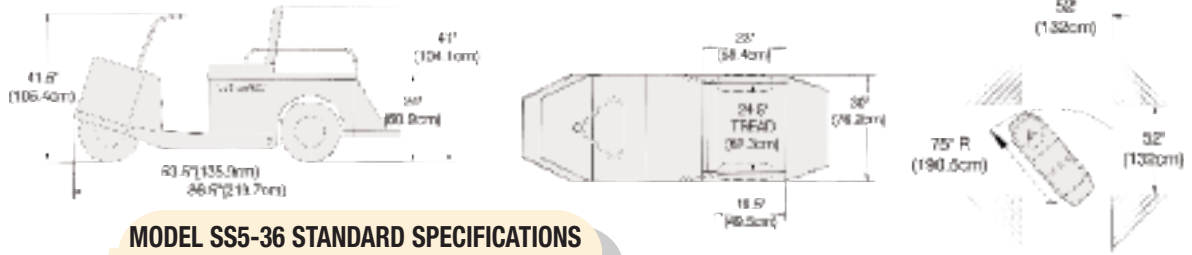

MODEL SS5-36 STANDARD SPECIFICATIONS

Product Line	SS5-36
Unit Weight Lbs (Kgs)	701 (309 kg)
Load Capacity Lbs (Kgs)	600 (272 kg)
Wheels	3 Wheels
Battery Type (Lead Acid)	220 Amp Hours, 6 Volts
System Voltage	24 Volt
Energy Consumption	211 Watt/Hr. Per Mile
Travel Distance (Unloaded)	20 Miles
Drive Axle	Direct Drive, Oil Bath
Transmission	12:1 Reduction
Motor h.p. 24V@935 rpm	DC Series Wound 4.5 Hp
Speed (Unloaded)	10 Mph (16 Kmph)
Gradeability	10% Empty, 5% Fully Loaded
Tires Pneumatic	4.80x8 Load Range B
Brakes	Two Wheel Mechanical Rear Drum, Foot Operated Parking Brake
Steering	Loop Tiller
Frame	All Steel Unitized Body, Heavy Duty 16 Gauge Diamond Plate Steel
Suspension	Safety Orange, Traffic Yellow
Color	Split Seat Cushion With Full Length
Seats	Foam Padded Cushion And Backrest; Flip Down Seat For Passenger
Controller	Solid State Speed Controller 275 Amp 24 Volt
Wiring	Modular Harness Design With Weather Protected Connectors
Instrumentation	Battery Discharge Indicator, Forward/Reverse Selector, Key Switch, Seat Switch
Light Accessories	Headlight, Taillight, Stop Light
Charger	25 Amp, 24 Volt Built In automatic Charger
Charge Time	8 Hours For Charge On Batteries 80% Discharged
Input Voltage	110 Volt/220 Volt, 50 Hz./60 Hz.
Charging Energy Requirements	6.6 Kw Hr. @ 80% Efficiency
Conformance	Type E OSHA Requirements 1910.178, ANSI B56.8 Requirements (Factory Mutual Research Corp. Approved)



MODEL SS5-34 - Mechanical Brake Through Differential; Flip Down Seat Optional; Headlight, Taillight, And Stop Light Optional; Automotive Differential With Speeds 5 Mph to 10 Mph; Capacity 500 lbs

STEPSAVER OPTIONAL FEATURES

Charger

- Portable 25 amp charger
- Portable 40 amp charger 110V/220V
- Built in 110V/220V 50 Hz.

Accessories

- Strobe light, amber on pole
- Reverse alarm
- Hour meter

Tires

- Soft solid tires

Deck

- Diamond plate deck
- Clipboard holder

Battery Compartment

- 244 a.h. batteries
- Lift out battery box (SS5-34)

Frame

- Smooth skin
- Front bumper
- Geared steering

Color

- White or special paint color
- Undercoating



TAYLOR-DUNN CORPORATION
Commercial and Industrial Vehicles Since 1949



METRO CROWN INTERNATIONAL
A TAYLOR-DUNN COMPANY



TIGER TRACTOR
A TAYLOR-DUNN COMPANY



2114 West Ball Road, Anaheim, CA 92804 • (714) 956-4040 • FAX (714) 956-3130
Toll Free (800) 688-8680 Visit our website: www.taylor-dunn.com

Specifications, standard equipment, accessories and modifications subject to change without notice.

LS-536-21