

STOCKCHASER

The Stock to Dock Solution

MODEL	SC-090-24	SC-100-24	SC-100-36	SC-100-48
TYPE	Electric	Electric	Electric	Electric
SPEED (MAX MPH)	9 (14 kmph)	8 (13 kmph)	8 (13 kmph)	8 (13 kmph)
RANGE (MILES)	20 (32 km)	20 (32 km)	30 (48 km)	40 (64 km)
LOAD CAPACITY (lbs)	900 (408 kg)	1,000 (450 kg)	1,000 (450 kg)	1,000 (450 kg)
TOWING CAPACITY (lbs)	2,000 (907 kg)	5,000 (2273 kg)	5,000 (2273 kg)	5,000 (2273 kg)
BED SIZE (W"xL")	29x58 (73x147cm)	29x58 (73x147cm)	29x58 (73x147cm)	29x58 (73x147cm)
VOLTAGE	24	24	36	48
TURNING RADIUS (INCHES)	67 (160 cm)	67 (160 cm)	67 (160 cm)	67 (160 cm)

Tough and Dependable Product Solutions

Taylor-Dunn® Stockchaser is a cost-effective solution to improve efficiency in any warehousing application. This unique narrow aisle, highly maneuverable vehicle provides an ergonomic advantage to the operator by bringing him closer to the material to be picked.

Stockchaser has an all steel unitized body and 24, 36, or 48 volt drive system, providing years of service in rugged applications. Equipped with 4, 5 or 6 step ladder, the Stockchaser allows the operator to pick materials from higher stock locations.

Supported by the Taylor-Dunn® team of worldwide dealer network, we pride ourselves in configuring this Stockchaser to your specific application needs. Options like multilevel shelving, clip board, steering wheel or extended deck overlay provide maximum functionality for your operation.

Stockchaser configured with roll out or lift out battery box can provide 24 hours of service in any warehousing application.

With over 160,000 vehicles in service and over 55 years of experience, *Taylor-Dunn products are the best way to go about your business.*






Some vehicles shown with optional equipment



TAYLOR-DUNN®
Commercial and Industrial Vehicles Since 1949

The best way to go about your business

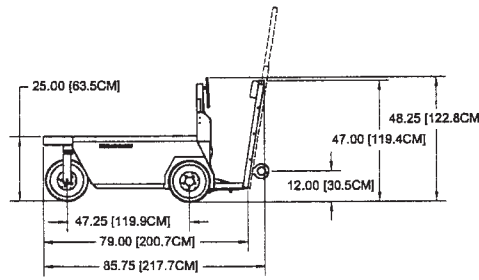

STOCKCHASER STANDARD SPECIFICATIONS

Product Line	MODEL SC-090-24	MODEL SC-100-24	MODEL SC-100-36	MODEL SC-100-48
Unit Weight:	760 lb (345 kg)	970 lb (440 kg)	1,095 lb (497 kg)	1,195 lb (542 kg)
Load Capacity:	900 lb (400 kg)	1,000 (450 kg))	1,000 (450 kg))	1,000 (450 kg))
Battery Type (Lead Acid):	217 Amp-Hours, 6 Volt	217 Amp-Hours, 6 Volt	217 Amp-Hours, 6 Volt	217 Amp-Hours, 6 Volt
System Voltage:	24 Volt DC	24 Volt DC	36 Volt DC	48 Volt DC
Drive Axle:	Direct Gear Drive	GT Automotive Type Differential	GT Automotive Type Differential	GT Automotive Type Differential
Transmission:	Oil Bath, Helical Gears	Oil Bath, Helical Gears	Oil Bath, Helical Gears	Oil Bath, Helical Gears
Motor:	3.8 hp, Series	4.3 hp, Separately Excited	6.6 hp, Separately Excited	8.8 hp, Separately Excited
Tires:	4.80x8 Load Range B, Pneumatic	4.80x8 Load Range B, Pneumatic	4.80x8 Load Range B, Pneumatic	4.80x8 Load Range B, Pneumatic
Brakes:	Rear Mech Drum, Hand Operated Parking Brake (In Rear Wheels)	Rear Mech Disc, Hand Operated Parking Brake (In Rear Wheels), Regenerative Braking	Rear Mech Disc, Hand Operated Parking Brake (In Rear Wheels), Regenerative Braking	Rear Mech Disc, Hand Operated Parking Brake (In Rear Wheels,) Regenerative Braking
Steering:	Clover Leaf Steering Wheel	Clover Leaf Steering Wheel	Clover Leaf Steering Wheel	Clover Leaf Steering Wheel
Frame:	All Steel Unitized Body, Heavy Duty Diamond Plate Steel	All Steel Unitized Body, Heavy Duty Diamond Plate Steel	All Steel Unitized Body, Heavy Duty Diamond Plate Steel	All Steel Unitized Body, Heavy Duty Diamond Plate Steel
Suspension:	Solid Mounted Rear Axle	Solid Mounted Rear Axle	Solid Mounted Rear Axle	Solid Mounted Rear Axle
Color:	Traffic Yellow	Safety Orange	Safety Orange	Safety Orange
Seat:	Padded Backrest	Padded Backrest	Padded Backrest	Padded Backrest
Controller:	Solid State	Solid State, Self Diagnostics	Solid State, Self Diagnostics	Solid State, Self Diagnostics
Instrumentation:	Battery Status Indicator	"Smart View Display" (Battery, Status Indicator, Hour Meter, "Fault Code" Display) Reverse Alarm	"Smart View Display" (Battery, Status Indicator, Hour Meter, "Fault Code" Display) Reverse Alarm	"Smart View Display" (Battery, Status Indicator, Hour Meter, "Fault Code" Display) Reverse Alarm
Charger:	600 watt, Built In Automatic Charger W/Interlock	600 watt, Built In Automatic Charger W/Interlock	1 kW, Built In Automatic Charger W/Interlock	25 amp, Portable Automatic Charger W/Interlock
Conformance Standards:	Type E OSHA Requirements 1910.178, ANSI B56.8 Requirements	Type E OSHA Requirements 1910.178, ANSI B56.8 Requirements	Type E OSHA Requirements 1910.178, ANSI B56.8 Requirements	Type E OSHA Requirements 1910.178, ANSI B56.8 Requirements



STOCKCHASER OPTIONAL FEATURES*

Accessories

- Strobe light amber - on pole
- Headlight
- Round steering wheel
- Hour meter
- Knee pad, comfort kit
- 4, 5 or 6 step ladder

Charger

- Portable charger
- Built in 110V/220V 50 hz

Tires

- 4.00x8 soft solid tires on split rims
- 16 1/4 solid extra cushion tires
- Dual front fork

Deck

- Wider bed
- Clipboard holder
- Second level deck

Battery

- Lift out battery box
- Roll out battery box (24 Volt only)
- 244 amp hr battery

Hitches

- Hitch automatic coupling trailer
- Hitch pintle trailer
- Hitch 1 7/8" or 2" ball & bracket

Frame

- Smooth skin

Factory Customization

- Maintains OSHA compliance
- Contact your local dealer for details

*Some optional features not available on all models, consult your dealer.



TAYLOR-DUNN®
CORPORATION
Commercial and Industrial Vehicles Since 1949



METRO CROWN INTERNATIONAL
A TAYLOR-DUNN® COMPANY



TIGER TRACTOR
A TAYLOR-DUNN® COMPANY

2114 West Ball Road, Anaheim, CA 92804 • (714) 956-4040 • FAX (714) 956-3130
Toll Free (800) 688-8680 Visit our website: www.taylor-dunn.com