

MULE

Maneuverable Electric Tow Tractor

MODELS	C4-32	C4-33
TYPE	Electric	Electric
SPEED (MAX MPH)	9 (14 kph)	6.5 (10 kph)
RANGE (MILES)	20 (32.2 km)	20 (32.2 km)
LOAD CAPACITY (lbs)	1,400 (635 kg)	1,200 (544 kg)
TOWING CAPACITY (lbs)	8,750 (3,969 kg)	7,500 (3,402 kg)
BED SIZE (W"xL")	29"x40"	29"x40"
VOLTAGE	36	24
TURNING RADIUS (INCHES)	70" (178 cm)	70" (178 cm)
DBP	175 Lbs	150 Lbs

Based on Standard Configuration

*Typical capacity: Actual load capacity depends on application and vehicle configuration

*Typical capacity: Actual towing capacity depends on application and vehicle configuration



Tough and Dependable Product Solutions

Taylor-Dunn's Mule C4-32 and C4-33 have the shortest turning radius available in a sitdown combination burden carrier/tow tractor. With a 28" wheel base, they can maneuver into corners other powered trucks simply cannot reach - indoor or outdoor.

Heavy-duty batteries, built-in fully-automatic chargers make sure these trucks are always ready to go. They are ideal for moving loads over smooth floors in warehousing, hospitals, schools and other environments where quiet, fume-free operation is necessary.

Only 30 inches wide, these compact trucks clear narrow aisles and standard doorways. Full 360° turns can be made in a mere 140".

Adjustable seats and all-steel construction ensure a comfortable, safe ride. Individually padded seat and backrest are covered with tough heavy-duty vinyl upholstery. Bumpers are heavy-duty steel welded to the frame; 16 gauge steel diamond plate facing covers all exterior surfaces.

With more than 150,000 vehicles in service and over 50 years experience in providing solutions to our customers, Taylor-Dunn products are the best way to go about your business.

Vehicles may be shown with optional equipment



TAYLOR-DUNN®
Commercial and Industrial Vehicles Since 1948

The best way to go about your business

PERSONNEL CARRIERS



Aristocrat



Roadmaster

BURDEN CARRIERS



Taylortruck



Loadmaster



Model B Series



Electruck



Maintenance Expediter



Stepsaver



Stockchaser

TOW TRACTORS



Towmaster



Mule




Pullmaster





Model E



Huskey

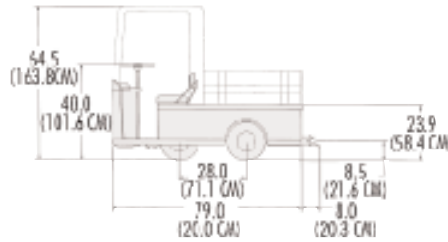

C4-32/33

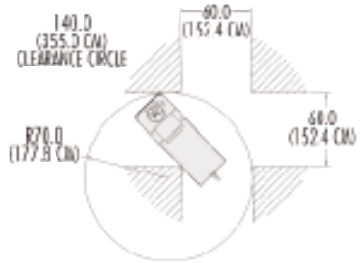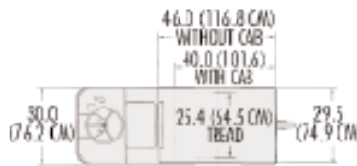

MULE - STANDARD SPECIFICATIONS

Product Line	C4-32
Wheels	3 wheels
Unit Weight	918 lbs. with batteries and charger
Load Capacity	1,400 lbs.
Draw Bar Pull	175 lbs (79.4 kg)
Battery Type (Lead acid)	220 amp hour, 6 volts
System Voltage	36 volt
Travel Distance (Unloaded)	20 miles (32.2 km)
Energy Consumption	264 watt/hr/mile
Drive Axle	Automotive differential
Transmission	"Power Traction" drive operating in oil bath, 14:1 reduction
Motor	NEMA rated 36v, 6.0 hp @ 1,200 rpm, intermittent duty to 2.0 hp @ 2,800 rpm, normal duty
Speed	9.0 mph (14 km/h) standard (empty)
Gradeability	15% empty, 5% loaded
Tires	4.80 x 8 load range B
Steering	Chain and sprocket reduction to front fork
Brakes	Mechanical brake through differential to both rear wheels, hand operated parking brake
Frame	All-steel unitized body and frame, heavy duty 16 gauge diamond plate facing on all exterior surfaces
Bumper	Heavy duty steel, welded to frame
Color	Safety orange, traffic yellow
Seat	Adjustable individual seat with backrest
Controller	Solid state speed control, 400 amp, 36 volt
Instrumentation	Battery status indicator
Horn	12 volt electric horn
Charger	25 amp, 36v Lestronic II built-in charger
Conformance Standards	Type E OSHA requirements 1910.178, ANSI B56.8-1987 requirements

MODEL C4-33: 802 lbs. unit weight; 1,200 lbs. load capacity; 150 lb. draw bar pull; 220 ah batteries; 25 amp, 24 volt built-in charger; NEMA rated 24-volt, 4.5 hp @ 8,000 rpm, intermittent duty to 1.5 hp @ 1,600 rpm, normal duty motor; 6.5 mph (10 km/h) standard (empty) speed

* Specifications based on standard vehicle configuration on smooth level surface with unit unloaded.

MULE OPTIONAL FEATURES

Accessories

- Headlight, taillight
- Hour meter
- Light on top of cab
- Stoplight
- Windshield wiper
- Mirrors
- Reverse warning beeper

Batteries

- 244 ah batteries

Tires

- 16 1/4 x 4 x 11 1/4 extra cushion solid tires
- Soft solid tires

Brakes

- Hydraulic

Deck

- Stake sides
- Diamond plate deck

Hitches

- Hitch automatic coupling
- Hitch pintle

Cab

- Fiberglass cab & vinyl doors

Color

- Special paint color
- Undercoating



TAYLOR-DUNN CORPORATION
Commercial and Industrial Vehicles Since 1949



2114 West Ball Road, Anaheim, CA 92804 • (714) 956-4040 • FAX (714) 956-3130
Toll Free (800) 688-8680 Visit our website: www.taylor-dunn.com