


Display Modules

S7810M ModBus Module

Supports remote mounting of a Keyboard Display Module, personal computer PLC interface for multi-dropped 7800 SERIES subnetworks, and remote reset.

- Multi-dropped communications bus interface.
- Remote reset.
- Ability to remotely mount a Keyboard Display Module.

Dimension Diagrams

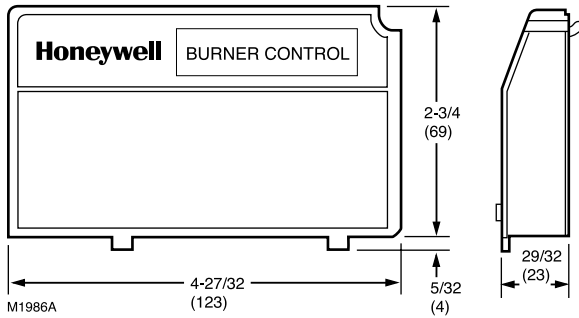

Ambient Temperature Rating: -40 F to 140 F (-40 C to 60 C)

Vibration: 0.5 G environment

Weight (lb): 4 oz (113 g)

Approvals:

Canadian Standards Association: Certified, File No. LR95329-3.

Underwriters Laboratories, Inc: Listed: File No. MP268, Guide No. MCCZ.

Product Number	Electrical Ratings, Power Supply (Vac)	Comments	Description
S7810M1003	13 Vdc peak fullwave rectified (+20/-15%).	Includes 208727 8 pin electrical connector	Modbus Module
S7810M1029	13 Vdc peak fullwave rectified (+20/-15%).	Includes 208727 8 pin electrical connector	ControlBus(tm) Module-MODBUS - CE Certified


S7820 Remote Reset Module



Serves as link between remote reset pushbutton and relay module. Allows 7800 SERIES relay module to be reset from a remote location.

- Reset button can be installed up to 1000 feet away.
- Installs directly on the front of 7800 SERIES relay module.

Dimension Diagrams

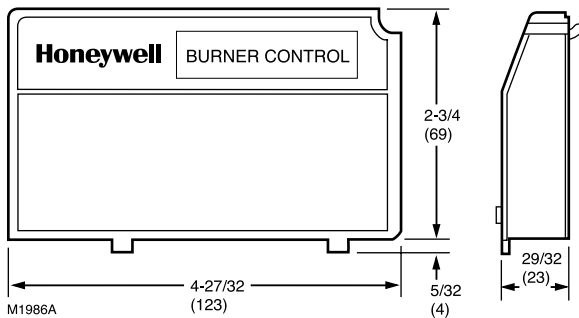

Ambient Temperature Rating: -40 F to 140 F (-40 C to 60 C)

Vibration: 0.5 G environment

Weight (lb): 3 oz (113 g)

Approvals:

Underwriters Laboratories, Inc: Listed: File No. MP268, Guide No. MCCZ.

Product Number	Comments	Description
S7820A1007	Includes 203541 5-wire Connector	Remote Reset Module