

PRINT

E-660

The E-660 is built to handle the heaviest loads, up to 10,000 lb.

Its low cargo deck ensures stability and safety of operation.

The standard configuration, with a single seat and half-cowl, provides full-length space on the right side to carry long loads. A second seat is optional.

Low maintenance is guaranteed by automotive differential and self-adjusting disc brakes, with large bolt-on discs.

Benefits

VERSATILITY. Powerful 15 hp motor.

RUGGEDNESS. Automotive ring gear differential, axle shafts on roller bearings.

DEPENDABILITY. Automotive self-adjusting disc brakes, large bolt-on discs.

COMFORT. Bucket seats on slide adjusters.

LONG RANGE. 48-volt battery pack provides 40% more running time.

BATTERY EFFICIENCY. DC/DC converter to equalize battery cells.


ROUND-THE-CLOCK OPERATION. Lift-out battery box.

MOTREC
Industry driven
www.motrec.com



E-660

Dimensions

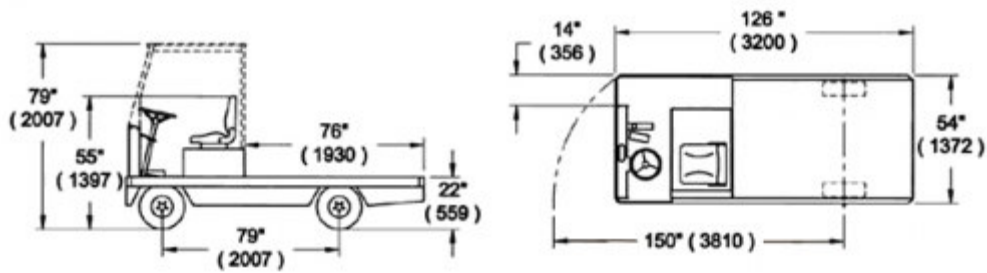

Technical specs

Type	48-volt Burden Carrier
Capacity	*3,000 lb. (1 364 kg). 5,000, 7,000 or 10,000 lb. cargo capacity options.
Speed (Max)	8 mph (13 kmh)
Motor	15 hp
Controller	Electronic speed controller
Battery	Not included. 22.5"L x 24.8"W x 20"H maximum size (571L x 630W x 508H cm)
Charger	Not included
Transmission	GOODYEAR Eagle Synchronous drive
Drive axle	Differential with automotive ring gear
Brakes	4-wheel brakes, 11 inch diameter automotive discs.
Steering	Automotive steering wheel
Suspensions	Dual leaf springs on front and rear.
Seats	One bucket seat on slide adjusters
Indicators	Battery status indicator
Safeties	Deadman seat switch, optional reverse alarm
Lights	Dual head lights, dual tail/brake lights
Accessories	48VDC/12VDC converter, horn
Wheels	5.7x8 LRD pneumatic tires
Unit Weight	1,500 lb. (682 kg) without battery
Options	Reverse alarm. Two-passenger seating. Lift-out battery box with eight 6V-244AH batteries. Digital battery status indicator, hour meter. Maintenance meter. Strobe light. Turn signals. Steel cab and doors. Welding or vacuum truck kit. 5000, 7,000 or 10,000 lb. cargo capacity options. 48" wide deck. 96" long deck.
Standard	Conforms to requirements for type E as stated in UL 583 and ANSI B56.8
Notes	*includes 200 lb. per passenger. Specifications and standard equipment are subject to change without notice.



MOTREC
Industry driven

www.motrec.com