

Vertical Balers

A broad range of balers to fulfill your specific needs

Bales Corrugated, Plastic, Newspaper, and other non-ferrous materials

Reduces waste and associated disposal costs

"Time under Pressure" produces a denser bale

Meets or exceeds ANSI Z245.5

Baler design ensures operator safety

TEFC high efficiency motor

Expert installation available

UL® and CUL® listed panels

Easy to operate

Operator safety video included to ensure safe operation

Soft-shift shockless hydraulic circuit provides longer life

Full hinge on main door provides durability

Semi-automatic bale ejection for easy bale ejection

Adjustable bale sizing on all models (3"-6" height range)

Authorized Distributors provide local sales and service



200 Clover Reach Drive
Peachtree City, GA 30269

www.harriswaste.com

(800) 373-9131 • (770) 631-7290 • (770) 631-7299 fax


Harris/Selco Vertical Balers

| Model Name | | V5-HD * | V5-HD EXP | V5-SLP * | V5-XHD | VNF-5 | V-6 * | VS-6M * | VDC-1 |
|---------------------------------|-----------------|-----------|-----------|------------|-----------|-------------------|-----------|-----------|---|
| Bale Size , in baler | Length: in.(mm) | 60 (1524) | 60 (1524) | 60 (1524) | 60 (1524) | 60 (1524) | 72 (1829) | 72 (1829) | Crushed Drum Height 6 - 8 (152-203) |
| | Width: in.(mm) | 30 (762) | 30 (762) | 30 (762) | 30 (762) | 30 (762) | 30 (762) | 42 (1067) | |
| | Height: in.(mm) | 48 (1219) | 44 (1118) | 33 (838) | 48 (1219) | 48 (1219) | 48 (1219) | 48 (1219) | |
| Bale Weight (OCC) | (lb) | 900-1100 | 850-1050 | 600-700 | 1350-1450 | 1300-1500 | 900-1200 | 900-1300 | Varies with Drum |
| | (kg) | (408-499) | (386-476) | (272-318) | (612-658) | (590-680) | (408-544) | (408-590) | |
| Cycle Time | No Load (sec) | 50 | 50 | 29 | 71 | 41 | 50 | 50 | 42 |
| Motor Horsepower | | 10 | 10 | 10 | 15 | 15 | 10 | 10 | 5 |
| Hydraulic Pressure (Max) | (psi) | 1,800 | 1,800 | 1,600 | 1,800 | 2,800 | 1,800 | 1,800 | 1,600 |
| | (BAR) | (124) | (124) | (110) | (124) | (193) | (124) | (124) | (110) |
| Platen Force Maximum | (lb) | 50,900 | 50,900 | 45,239 | 69,272 | 140,743 | 50,900 | 50,900 | 20,106 |
| | (kg) | (23,088) | (23,088) | (20,520) | (31,422) | (63,719) | (23,088) | (23,088) | (9,120) |
| Main Cylinder | Bore: in.(mm) | 6 (152) | 6 (152) | 6 (152) | 7 (178) | 8 (203) | 6 (152) | 6 (152) | 4 (102) |
| | Stroke: in.(mm) | 48 (1219) | 48 (1219) | 27 (686) | 48 (1219) | 54 (1372) | 48 (1219) | 48 (1219) | 36 (914) |
| Hydraulic Pump Capacity | gpm(lpm) | 12 (45.4) | 12 (45.4) | 12 (45.4) | 12 (45.4) | 28.5/7.5 (108/28) | 12 (45.4) | 12 (45.4) | 4.5 (17) |
| Oil Reservoir Capacity | gal(L) | 18 (68.1) | 18 (68.1) | 12 (45.4) | 18 (68.1) | 44 (166.6) | 18 (68.1) | 18 (68.1) | 12 (68.1) |
| Feed Opening | Width: in.(mm) | 60 (1524) | 60 (1524) | 60 (1524) | 60 (1524) | 60 (1524) | 72 (1829) | 72 (1829) | 39 (991) |
| | Height: in.(mm) | 27 (686) | 22 (559) | 19.5 (495) | 24 (610) | 27 (686) | 25 (635) | 32 (813) | 30 (762) |
| Shipping Weight | (lb) | 4,300 | 4,200 | 3,860 | 6,500 | 9,750 | 5,500 | 6,500 | 2,800 |
| | (kg) | (1,950) | (1,905) | (1,751) | (2,948) | (4423) | (2,495) | (2,948) | (1,270) |

* Entire Baler UL® listed

Performance Rates, Bale Weights, and Bale Densities are Subject to Moisture Content, Material Pre-bale Densities, Feed Rates, and Other Variables in Baling.

(SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE)

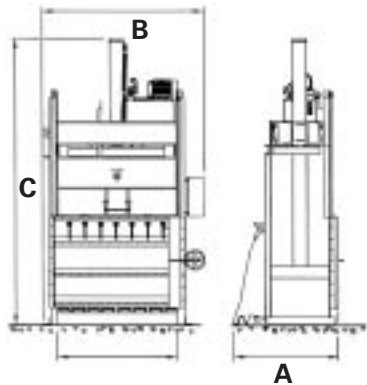

Dimensions in. (mm)

| Model | A | B | C |
|-----------|-----------|-----------|------------|
| V5-HD | 47 (1194) | 80 (2032) | 144 (3658) |
| V5-HD EXP | 47 (1194) | 88 (2235) | 138 (3505) |
| V5-SLP | 50 (1270) | 80 (2032) | 107 (2718) |
| V5-XHD | 47 (1194) | 83 (2108) | 148 (3759) |
| VNF-5 | 47 (1194) | 83 (2108) | 147 (3734) |
| V-6 | 47 (1194) | 93 (2362) | 147 (3734) |
| VS-6M | 58 (1473) | 93 (2362) | 150 (3810) |
| VDC-1 | 36 (914) | 51 (1295) | 94 (2388) |

Dimensions in. (mm)

| Model | D | E | F |
|-----------|----------|----------|------------|
| V5-HD | 18 (457) | 24 (610) | 103 (2616) |
| V5-HD EXP | 18 (457) | 24 (610) | 103 (2616) |
| V5-SLP | 18 (457) | 24 (610) | 108 (2743) |
| V5-XHD | 18 (457) | 24 (610) | 104 (2641) |
| VNF-5 | 18 (457) | 24 (610) | 104 (2641) |
| V-6 | 18 (457) | 24 (610) | 117 (2972) |
| VS-6M | 18 (457) | 24 (610) | 117 (2972) |
| VDC-1 | 18 (457) | 24 (610) | 68 (1727) |

