





AC Power Module



550-070

- Provides central 120VAC power for FastHome[™] modules
- Mounts in FastHome™ or similar surface-mount enclosure
- Snaps into place without tools
- Features UL Listed NEMA 5-15R duplex receptacle
- Includes rear 1/2" knock-out hole with push-in NM-B cable connector
- Dimensions: 6¹/2″ (W) x 2⁷/8″ (H) x 1″ (D)
- Also available: FastHome[™] enclosures and phone, TV, data and audio modules

Product Description

The FastHome[™] AC Power Module provides central 120VAC power for modules in the FastHome[™] surface-mount enclosure. It features a UL-listed NEMA 5-15R duplex receptacle and a rear ¹/2″ knock-out hole with push-in NM-B cable connector. This module features 18-gauge cold rolled steel construction for strength and excellent RFI shielding. It also offers a white textured powder-coated corrosion-resistant finish. Installation of the module in a FastHome[™] enclosure is easy, as nylon pins snap the unit into place without tools.

PR-014








FastHome™ AC Power Module



Specifications

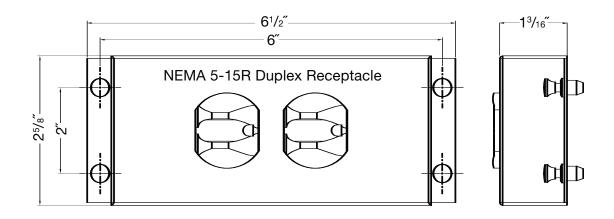

Mechanical Construction

Body: 18-Gauge Cold Rolled Steel

White Textured Powder-Coated Corrosion-Resistant Finish

Pins: Nylon, Black

Electrical Construction

UL Listed Duplex NEMA 5-15R 125V, 15A, 2-Pole, 3-Wire Receptacle

Other FastHome™ Products

550-010 Telephone/TV Hub Module 550-020 Telephone Hub Module 550-030 Data Hub Module 550-040 TV Combiner/Splitter Module 550-050 Audio Splitter Module Ethernet Switch Module 550-060 550-080 RF Modulator Module 550-100 11" Surface Mount Enclosure (7" W x 11" H x 35/16" D) 550-105 19" Surface Mount Enclosure (149/16" W x 19" H x 45/16" D) 550-200 19" Flush Mount Enclosure (143/8" W x 19" H x 31/2" D) 550-205 32" Flush Mount Enclosure (143/8" W x 32" H x 31/2" D) 44" Flush Mount Enclosure 550-210

Packaging

Each FastHome™ module is boxed individually.

(143/8" W x 44" H x 31/2" D)

Ordering Information:

550-070 FastHome™ AC Power Module