



MINI-SPRAYFAST™ Adhesive Applying System

**A Low Cost
Water Based
Adhesive
Spray System!**



Item# 39047

Machine is complete as shown.
(Adhesive not included.)

Easy Operation

Place the supply tube from the pump into the adhesive container. Attach the air line to the pump. The pump is self-priming and charges the gun quickly. Hold the spray gun about 10-12" from the work. Simply depress the trigger switch to produce the spray pattern.

Versatile

The Mini-Sprayfast is lightweight; the complete unit weighs approximately 9 pounds. Its unique design allows it to be mounted in any position and it can be used with any size adhesive container - 1 gallon, 5 gallon or 55 gallon. For ease of operation, it comes complete with 10 feet of hose between the pump and the spray gun.

Easy Clean-Up

For quick clean-up disconnect the air, press the trigger switch to relieve fluid pressure and submerge the spray gun and air cap in water. For extended clean-up, simply place the adhesive supply tube into warm water, press the gun trigger and let the water run through the pump. Place the spray gun in a damp towel until its next use.

Durability

The pump is manufactured of a high strength, shock resistant, polypropylene polymer and uses a proven diaphragm pump design. The spraygun is constructed of corrosion resistant aluminum and stainless steel.


Safe

The mini-sprayfast is specifically designed for use with Duro Dyne water based adhesive. These adhesives are nonflammable and do not contain toxic solvents. No venting is required.

Duro Dyne East Division, Farmingdale, NY 631-249-9000 Fax: 631-249-8346
Duro Dyne Midwest Division, Fairfield, OH 513-870-6000 Fax: 513-870-6005
Duro Dyne West Division, Santa Fe Springs, CA 562-926-1774 Fax: 562-926-5778
Duro Dyne Canada, Lachine, Quebec, Canada 514-422-9760 Fax: 514-636-0328
www.durodyne.com E-mail: durodyne@durodyne.com



©2000 Duro Dyne Corporation
Printed in USA 10/2000
BC039047

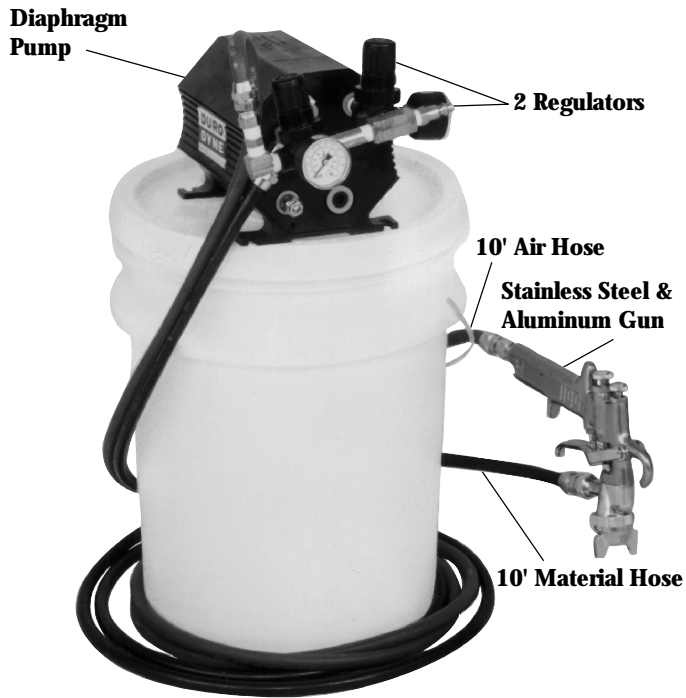

SPECIFICATIONS

Air Recommendations:

Pump: 80 PSI 1 CFM

Atomization: 50 - 90 PSI 15 - 24 CFM

PUMP SPECIFICATIONS

Type: Non-Metallic Diaphragm

Dimensions: 7³/₈ x 5¹/₂" x 5⁵/₈" (LxWxH)

Ratio: 1:1

Maximum G.P.M. (Litres): 5(18.9)

Suction Lift: 20+ Feet

Max. Gallons (CC's) Per Cycle: .014 (53)

Air Inlet: 1/4" (F)

Fluid Inlet: 1/4" (F)

Fluid Outlet: 1/4" (F)

Max. Op. Pressure PSI (bar): 100(6.8)

Pass Solids Max. Dia. In. (mm): 1/32" (.79)

Weight-Lbs. (kgs): 3.6 (1.63)

Polypropylene, 4.1
(1.86) Acetal

The Mini-Sprayfast is specifically designed for use with Duro Dyne Fast-tack Water-Base Adhesives.

WIT

Suggested Use: Adhesive for bonding insulation to sheet metal

Product Feature: Water base, good wet tack, non-flammable

TYPICAL PROPERTIES

Type: Resin Emulsion

Solids: 55% ± 2%

Weight: 9.1 ± .2lbs. per gal.

Color: White

Odor: Bland

Viscosity: 1500-2500 CPS.

Brookfield LVF #4 spindle, 60 RPM, 25°C

Flammability: Non-Flammable

Effect of Freezing: No Damage

Storage Life: 6 months @ 70°F

Thin with: Warm Water

Clean with: Warm Water/Detergent

Suggested Surface

Preparation: Surfaces should be clean and dry, free of dust, dirt, grease, oil and other foreign material.



Method of Application: Designed for use with Duro Dyne Adhesive Applying Equipment. As a general practice, it is advisable that liquid products be stirred prior to use.

Available in:

Item#	Description
5056	WIT-1 1 Gal. Can
5057	WIT-5 5 Gal. Pail
5058	WIT-55 55 Gal. Drum



Method of Application: Designed for use with Duro Dyne Adhesive Applying Equipment. As a general practice, it is advisable that liquid products be stirred prior to use.

Available in:

Item#	Description
5036	WSA-5 5 Gal. Pail
5037	WSA-55 55 Gal. Drum

WSA

Suggested Use: Adhesive for bonding insulation to sheet metal

Product Feature: Water base, non-flammable when wet, designed for spray use

TYPICAL PROPERTIES

Type: Resin Emulsion

Solids: 55% ± 2%

Weight: 9.1 ± .2lbs. per gal.

Color: Dark Grey

Odor: Bland

Viscosity: 1500-2500 CPS.

Brookfield LVF #4 spindle, 60 RPM, 25°C

Flammability: Non-Flammable

Effect of Freezing: No Damage

Storage Life: 6 months @ 70°F

Thin with: Water

Clean with: Warm Water

Suggested Surface

Preparation: Surfaces should be clean and dry, free of dust, dirt, grease, oil and other foreign material.