


FLEXIBLE DUCT CONNECTOR DISPENSER

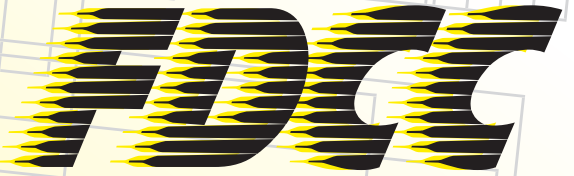

CONVENIENTLY DISPENSES CONNECTOR ANYWHERE IN THE SHOP

Flexible duct connector is generally a 100 ft. long coil packaged in a two foot by two foot carton. Depending upon the specific type, its weight ranges between thirty five and eighty five pounds. Due to its size and weight; moving, uncoiling, and laying out material is often awkward at best. The Duro Dyne Connector Dispenser can relieve many of the difficulties associated with the handling of flexible connector.

Duro Dyne's Model FDCC-2 keeps up to three rolls of flexible duct connector or vane rail within easy reach, anywhere in the shop. Full swivel casters make movement around the shop possible, and ball bearing rollers quickly dispense connector with a simple pull. A foot actuated brake locks the FDCC-2 in place when dispensing the connector. The shear attachment cuts the duct connector accurately and effortlessly.



**ITEM# 43002
FDCC-2 WITH SHEAR**

DISPENSER FEATURES:

- Handles all common configurations of Duro Dyne Flexible Duct Connector
- Wheels lock to prevent dispenser from moving
- 360° casters for easy maneuverability around the shop
- Capacity for up to 3 rolls of Duro Dyne Flexible Duct Connector or Vane Rail
- Ball bearing rollers for effortless dispensing
- Shear attachment
Dimensions: 35 1/2" high to table
40" wide
56" long

**DURO
DYNE**®

See the reverse side for complete information on Duro Dyne's Flexible Duct Connector Dispenser Shear.

**ITEM# 43010
FDCCS-10**



FLEXIBLE DUCT CONNECTOR SHEAR

SAVE TIME AND EASE WORKER FATIGUE

Both cutting flexible duct connector and making straight cuts in light gauge steel can be difficult and tedious with hand shears or snips. The FDCS-10 significantly speeds up this operation and eases worker fatigue.

To operate it, simply insert the material, (up to 18 gauge), into the 10" clear throat and pull the handle down. Hardened steel blades cut quickly, cleanly and effortlessly.

The FDCS-10 can be mounted to any workbench by passing bolts or lag screws through the pre-drilled holes in the feet of the shear.

For safety, the FDCS-10 has a safety pin to lock the shear in the open position and hold the 30" long handle upright and out of the way.



DURO
DYNE

MACHINERY DIVISION

© 2005 Duro Dyne Corporation
Printed in USA 04/2005
BC043010

Handle length: 30"

Capacity: 18 gauge

Height
(not including handle): 11"

Throat depth: 10 inches

Tool steel blades are easily removable for replacement or sharpening

Safety Pin to secure shear when not in use



Duro Dyne East Division, Bay Shore, NY
Duro Dyne Midwest Division, Fairfield, OH
Duro Dyne West Division, Santa Fe Springs, CA
Duro Dyne Canada, Lachine, Quebec, Canada

631-249-9000 Fax: 631-249-8346
513-870-6000 Fax: 513-870-6005
562-926-1774 Fax: 562-926-5778
514-422-9760 Fax: 514-636-0328

www.durodyne.com E-mail: durodyne@durodyne.com