

CertainTeed

# YELOMINE IB™

New Product – The Next Generation

WITH CERTAINTEED'S PROVEN CERTA-LOK™ RESTRAINED JOINT SYSTEM

CertainTeed developed the Yelomine restrained joint system over thirty years ago, and has successfully applied this technology in demanding applications, including International Mining, Irrigation and Trenchless water distribution systems. We now introduce the next generation of restrained joint products — YELOMINE IB.

## ALL THE ADVANTAGES OF THE PERFORMANCE PROVEN CERTA-LOK YELOMINE PVC RESTRAINED JOINT SYSTEM.

- Lightweight and easy to handle.
- Corrosion-resistant.
- No solvent cements or butt fusion equipment required.
- Easily disassembled for system changes, extension, movement or expansion.
- Designed for above ground as well as underground or buried applications.

## NOW AVAILABLE FOR THE INTERNATIONAL MINING, IRRIGATION AND TRENCHLESS MARKETS.

- Eliminates the costs associated with fusible pipe products.
- 20' lengths facilitate rapid assembly.
- Compatible with existing Certa-Lok Yelomine installations.
- Eliminates need for restrained joint couplings.

HIGH IMPACT STRENGTH  
AND UV PROTECTION FOR  
MINING, IRRIGATION AND  
TRENCHLESS APPLICATIONS

(U.S. Patent Number 6,086,297)

**CertainTeed** 

Quality made certain. Satisfaction guaranteed.

# YELOMINE IB™

The next generation in PVC restrained joint piping systems from the industry leader.



## DIMENSIONS, WEIGHTS AND PERFORMANCE DATA

SIZE	SDR	PRESSURE RATING PSI	O.D.	MIN. WALL	MAX FLOWRATE GPM	FRICTIONAL LOSS FT H <sub>2</sub> O/100 FT <sup>①</sup>	APPROX. WEIGHT LBS/FT	BOD	X	P	PART NUMBER <sup>②</sup>
4"	21	200	4.500	.214	203	1.99	1.86	5.12	3.000	1/8	266225
4"	17	250	4.500	.265	193	2.05	2.26	5.27	3.000	1/8	266218
6"	21	200	6.625	.316	440	1.27	3.99	7.55	3.000	3/16	266249
6"	17	250	6.625	.390	418	1.31	4.87	7.80	3.000	3/16	266232
8"	21	200	8.625	.411	746	0.94	6.72	9.80	3.163	5/8	266379

① Calculated at velocity of 5 ft./sec.

② Specify Perm or Non-Perm.

Note: All dimensions are in inches and are subject to normal manufacturing tolerances.

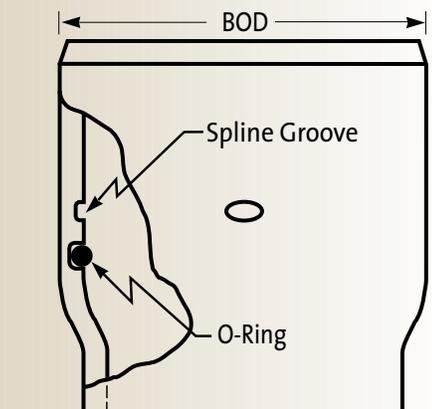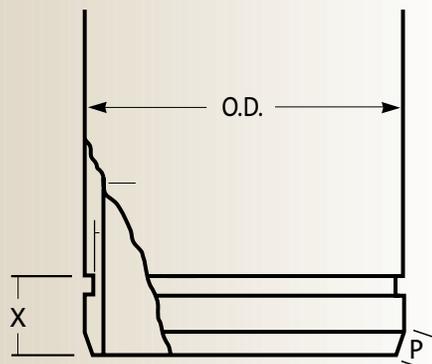

## PRODUCT PACKAGING

SIZE	SDR	PACKAGING FEET PER FAST-PAK	FAST-PAKS PER TRUCKLOAD	FEET PER TRUCKLOAD	WEIGHT PER TRUCKLOAD LBS.
4"	21	580	28	16,240	30,206
4"	17	580	28	16,240	36,702
6"	21	400	20	8,000	31,920
6"	17	400	20	8,000	38,960
8"	21	280	16	4,480	30,106



## ASK ABOUT OUR OTHER CERTAINTEED PRODUCTS:

ROOFING • SIDING • WINDOWS • INSULATION • FENCE • DECKING • RAILING • FOUNDATIONS • PIPE

CertainTeed Corporation  
Pipe & Plastics Group  
P.O. Box 860  
Valley Forge, PA 19482

Phone: 866-CT4-PIPE  
Fax: 610-254-5428  
www.certainteed.com

**CertainTeed** 