



One Piece ADA Tub/Shower Module Cast Acrylic

FEATURES

- **A 7532.20G R/L**

The unit is molded with an integral 15" seat . The seat is located at the head end and is 17" above the finished floor. Two soap / shampoo shelves shall be molded at each corner, 48" above the finished floor.

The tub/shower module shall be pre-drilled for a valve and a hand-held shower head when factory supplies components. All units have slip-resistant floor treatment.

The factory supplied components are to include two 50" stainless steel grab bars, one 25" stainless steel horizontal grab bar, integral seat and a stainless steel curtain rod.

The unit is thermoformed from a solid color Lucite XL® high gloss acrylic sheet into a one piece, totally seamless unit. This unit is reinforced on the back with a composite matrix which has a backside fire rating of "A" and a flame spread of 25.

NOTES

- Slip-resistant floor treatment meets performance requirements of ASTM F-462-78.
- The basic shower conforms to ANSI Z124.1 and ANSI A-117.1 when fully equipped.
- Nominal Dimensions: *Inside: 75" x 32"*
 Outside: 82 3/4" x 32 1/2"
 Roughing-In: 83 1/4" x 33"

OPTIONS

- Pressure balanced, single lever mixing valve with intergral diverter, check stops and tub filler. (185AA)
- Thermostatically controlled single lever mixing valve with intergral diverter, check stops and tub filler. (T167AA)
- Hand-held shower with swivel fitting, 69" flexible stainless steel hose, and in-line vacuum breaker. (H11)
- 24" slide guide. (For hand-held shower attachment.) (H12)
- Dome light. (ATP1)
- Shower curtain. (C8)




ADA TUB/SHOWER MODULE

A 7532.20G

One Piece Cast Acrylic ADA Tub/Shower Module

A 7532.20GR - Right Hand Drain
A 7532.20GL - Left Hand Drain

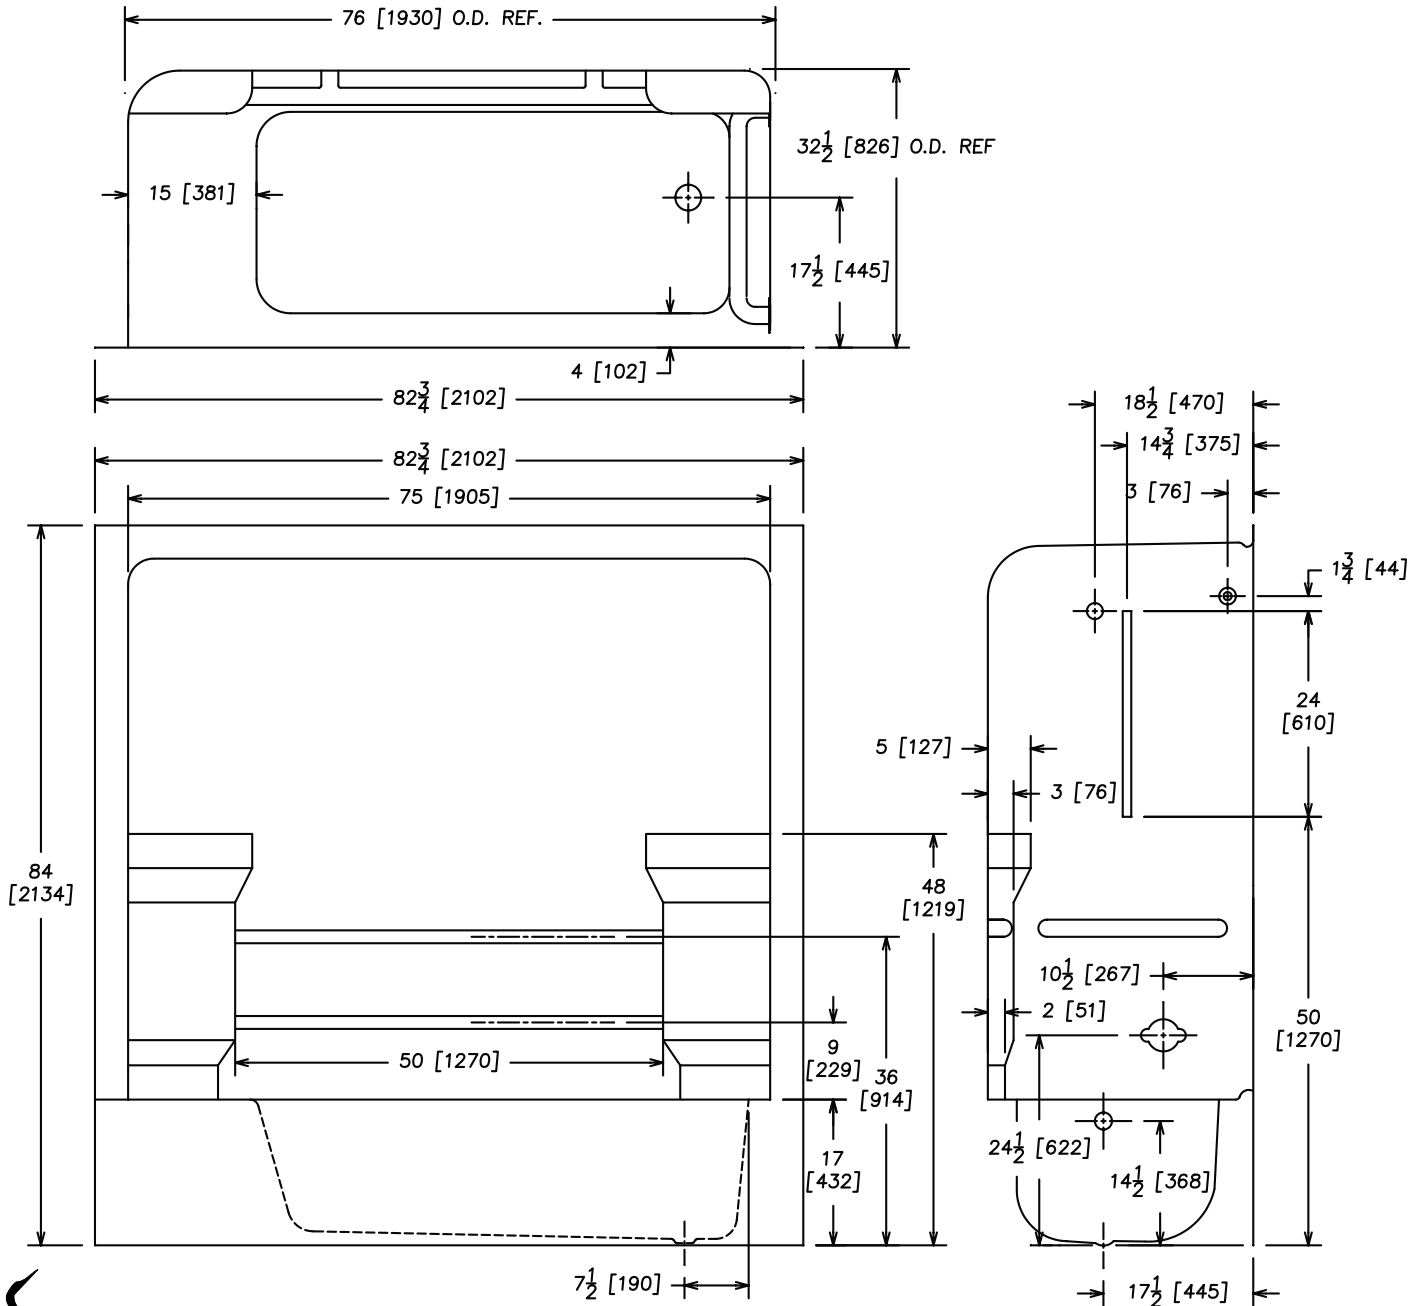

NOTE : LEFT HAND UNIT SHOWN.

IMPORTANT: Roughing-in dimensions may vary 1/2" and are subject to change or cancellation without prior notice.
No responsibility is assumed for use of superseded or voided leaflets.