


# Special Application Close Coupled Pump Three Phase Open Dripproof (ODP) Standard Efficient

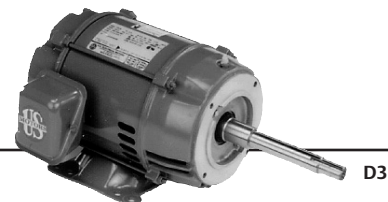

## APPLICATIONS:

Designed for the specific requirements of centrifugal pumps where the pump impeller is mounted directly on the motor shaft. Used where dirt and moisture are minimal.

## FEATURES:

- Class F Insulation, Class B Rise At Full Load
- Rolled Steel Frame
- Aluminum End Shields
- Oversized Ball Bearings w/Locked Shaft End Construction
- Premasked Mylar Nameplate (with CE Mark)
- Regreasable Bearings
- Double Shielded Bearings
- 40C Ambient, NEMA® Design B Performance (4)
- Conversion Kits: Canopy Kits

## Westcoast Shaft — Footed

HP	RPM	Voltage	Frame	Catalog Number	List	Discount Symbol	SF	"C" Dim. (inches)	Ship Wt. (lbs.)	Full Load Eff.	Full Load Amps	Notes
7-1/2	1800	208-230/460	213TCZ	DJ7S2AJ	\$693	DS-3PO	1.15	20.8	100	84.0	21.8-19.5/9.7	
10	3600	208-230/460	213TCZ	DJ10S1AJ	\$846	DS-3PO	1.15	20.8	100	87.5	28.3-25.7/12.9	
	1800	208-230/460	215TCZ	DJ10S2AJ	\$815	DS-3PO	1.15	20.8	110	86.5	29.1-26.6/13.3	
15	3600	208-230/460	215TCZ	DJ15S1AJ	\$994	DS-3PO	1.15	20.8	125	87.5	43-37/18.6	

Note 04 On 60 Hertz Sine Wave power

† All non-Emerson Electric Co. marks shown within this document are properties of their other respective owners