

Shaded Pole 21/29 Frame Replacement Motor

5.0" Diameter, Open Dripproof, Air Over




APPLICATIONS:

Designed to replace most original 21 and 29 frame GE motors.

FEATURES:

- Four Motors Replace Most Original 21 Frame GE® Motors (see below)
- Sleeve Bearings
- Holes Provided for Attaching a BX Connector
- Resilient Hub Rings, 2 1/4" Diameter
- Rotation CCW Lead End except 1468
- 30" Leads
- Dual Voltage Easily Changed by Quick Connects
- Class B Insulation
- 3/8" Diameter Shafts with 1/2" Adapters
- Extended Thru-bolts
- Automatic Reset Thermal Overload Protector
- Mounting Bracket Provided at Shaft End
- Can be Moved on Extended-Thru bolts to Fit Most Existing Bases
- Has Mounting Holes and Bolts to Match 21 Frame Bolt Circle for Stud Mounting
- Can be Resilient Mounted, Band Mounted or End Mounted
- Discount Symbol: DS-3HAC

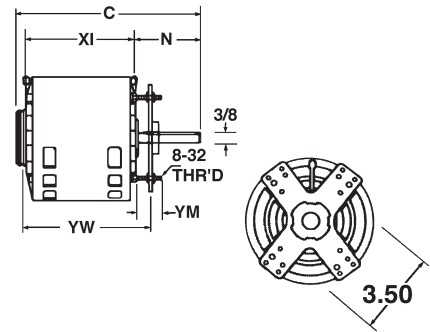

Hub Mount Bracket (2-1/4") Single Speed


HP	RPM	Volts	Catalog Number	List Price	Bearings	Amps	Shaft N	Shaft Dia.	Shell XI	Total C	Stud YM	Max. Ext. YW	Ship Wgt.	Notes
1/20	1550	115/208-230	1468	\$118	Slv	2.2/1.1	3.3	0.375	3.3	7.1	1.5	5.6	7	1
1/15	1550	115/208-230	1469	\$124	Slv	2.8/1.4	3.5	0.375	3.3	7.4	1.5	5.8	7	
1/10	1550	115/208-230	1470	\$125	Slv	3.8/1.9	3.5	0.375	3.6	7.6	1.5	6.1	7	
	1050	115/208-230	1471	\$126	Slv	3.8/1.9	3.3	0.375	3.8	7.6	1.5	6.1	7	

Replacement Cross Reference

Catalog Number	GE Number
1468	DG3001, DG3002, DG3003, DG3004, DG3021, DG3022, DG3023, DG3024
1469	FG3101, FG3102, FG3103, FG3104, FG3121, FG3122, FG3123, FG3124
1470	HG3201, HG3202, HG3203, HG3204, HG3221, HG3222, HG3223, HG3224
1471	HG3253, HG3254, HG3275, HG3263, HG3264

FEATURES:

- 36" Leads
- Mechanically Reversible Rotation
- Sleeve Bearings have All Angle Thrust System
- BX Connector
- CW Lead End
- Class B Insulation
- Continuous Duty, Air Over
- Automatic Reset Thermal Overload Protector
- Connection Instructions Included in Nameplate Data
- Green Ground Lead
- Discount Symbol: DS-3HAC

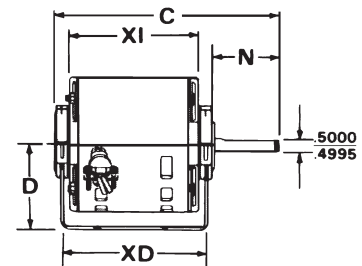

Resilient Base Single Speed

HP	RPM	Volts	Catalog Number	List Price	Bearings	Amps	Shaft N	Shaft Dia.	Shell XI	Total C	Stud YM	Max. Ext. YW	Ship Wgt.	Notes
1/10	1550	115	723	\$170	Slv	42Y	5.2	2.4	3.9	3.3	6.9	2.6	10	LA
	1550	230	721	\$175	Slv	42Y	2.6	2.4	3.9	3.3	6.9	2.6	9	
1/6	1550	115	724	\$186	Slv	42Z	5.4	2.4	4.4	3.8	7.4	2.6	11	LA
	1550	230	722	\$191	Slv	42Z	2.7	2.4	4.4	3.8	7.4	2.6	11	

Note 1 Rotation CWLE

Note LA Limited Availability

† All non-Emerson Electric Co. marks shown within this document are properties of their other respective owners