



PolyFlo™ P Polypropylene Vessels Industrial and Potable Water

Behringer PolyFlo™ P Series Vessels are an excellent choice and an economical solution to low flow industrial water, as well as potable and residential water applications. They are constructed of a reinforced polypropylene head and a reinforced polypropylene or clear styrene acrylonitrile (SAN) bowl. All materials of construction are ANSI/NSF Standard 42 registered materials, and meet FDA standards for acceptable materials for potable water use. The P Series Vessels accept industry standard 2 ½” diameter filter cartridges in 5, 10 and 20 inch nominal lengths. Additional accessories such as mounting brackets, differential pressure gauges, and pressure relief valves are available to ease installation and operation of the unit.

Applications

- Potable Water
- Juices / Beverages
- RO Pre-filters
- Chemicals
- Food Processing
- Food Products
- Coolants
- Waste Effluent

Features and Benefits

- White talc reinforced polypropylene head with blue talc reinforced or clear styrene acrylonitrile (SAN) bowl: These materials are NSF listed materials and meet FDA material requirements for food-grade applications
- Standard 3/4” NPT Connections
- Bowl-To-Head seal by securely retained Buna-N O-ring: The unique O-ring sealing filter ensures a reliable seal every time by positive tangential contact, without the possibility of dislodging the seal. This ensures a leak-free seal every time.
- Bowl-To-Head thread stop: The unique thread design incorporates a “stop thread” that prevents over-tightening commonly associated with tapered-end threads.
- Mounting threads in head, with optional mounting brackets for pipe and wall mounting
- Accepts industry standard cartridges with 2 ½” diameter in three standard lengths: 4-7/8”, 9-3/4”, and 20”
- Available with or without pressure relief vent button or differential pressure gauge.
- Installation wrenches are available to facilitate faster element change-outs
- Accepts Behringer’s string wound, melt-blown, pleated polypropylene, resin bonded, and activated carbon cartridges

Specifications

Recommended Operating Conditions

Type:	PolyFlo™ Inline T-Type
Connections:	3/4" NPTF
Max Operating Pressure:	150 psi (10 bar)*
Max Operating Temperature:	125° F (52° C)
Recommended Flow Rate:	
5"	2.5 gpm (9.5 lpm)
10"	8 gpm (30 lpm)
20"	16 gpm (60.5 lpm)

Materials of Construction


Head:	White talc-reinforced polypropylene
Bowl:	
Blue:	Blue talc-reinforced polypropylene
Clear:	Clear styrene acrylonitrile (SAN)
O-Ring Seal:	Buna-N (standard) Silicone, Viton, EPR, Encapsulated Teflon (on request)

Cartridge Specifications

Cartridge OD:	2.50 in. (63.5mm)
Cartridge ID:	1.06 in. (27mm)
Cartridge Ends:	Double Open End
Cartridge Lengths:	5 in.: 4.875 in. (124 mm) 10 in.: 9.75 in. (248 mm) 20 in.: 20.0 in. (508 mm)

* Max operating pressure of 150 psi is at ambient operating temperatures of 70° F (21° C)

Please note: maximum operating temperature is for the housing only, and is not indicative of the maximum operating pressure of the filter cartridge.

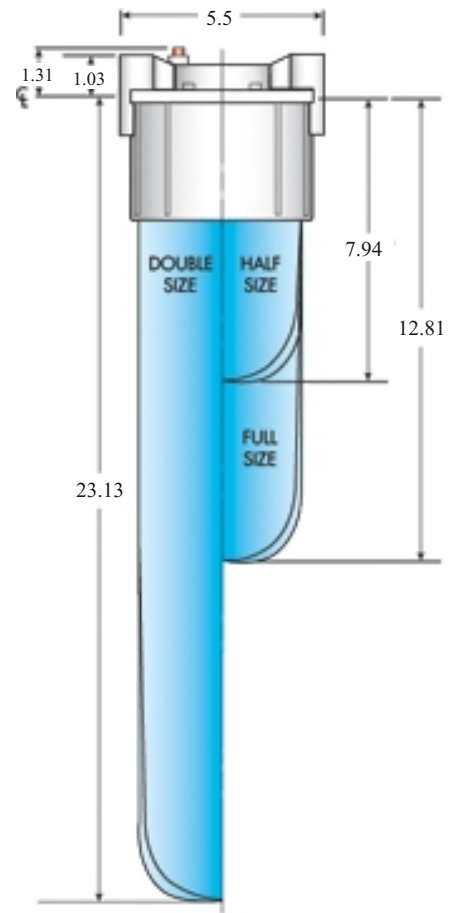

Filter Vessel Accessories

U-Shape Bracket	PFPB-U
L-Shape Bracket	PFPB-L
Wrench for 5/10 in. Shell	PFPW-1
Wrench for 20 in. Shell	PFPW-2

Ordering Information

Table1 Table2 Table3 Table4

PFP

Length <small>Table1</small>		Bowl <small>Table2</small>		Seals <small>Table3</small>		Options <small>Table4</small>	
5	4.875 in. (124 mm)	B	Blue polypropylene	B	Buna-N	omit	Without relief valve button
10	9.75 in. (248 mm)	C	Clear SAN	S	Silicone	V	With relief valve button
20	20.0 in. (508 mm)			V	Viton	DP	Diff. Pressure Gauge (With no relief valve)
				E	EPR		
				T	Teflon (Encapsulated)		

The information contained in this document is provided as an aid in properly selecting products and/or options. It is intended to be used by technically experienced users for general reference only. The supplier assumes no responsibility or liability for the accuracy or completeness of this document, as well as results obtained by the use of this information. Due to the variety of possible operating conditions, it is highly recommended that the user make their own tests to determine the safety and suitability of all products and combinations thereof. The user is solely responsible for final determination of such conditions.