

FIRE PUMP

Designed for fire pump applications per NFPA®† 20 where contaminants are minimal.

HP - 1 through 60 HP

Phase – Single and Three Phase

RPM - 1800 and 3600

Voltage

- 115/230
- 230
- 575
- 208-230/460
- 200
- 230/460

<u>Efficiency</u> – Standard and Energy Efficient

Enclosure


- Open Dripproof (ODP)
- Totally Enclosed Fan Cooled (TEFC)

Mounting - Footed

Shaft Types

- JM
- |P
- Westcoast



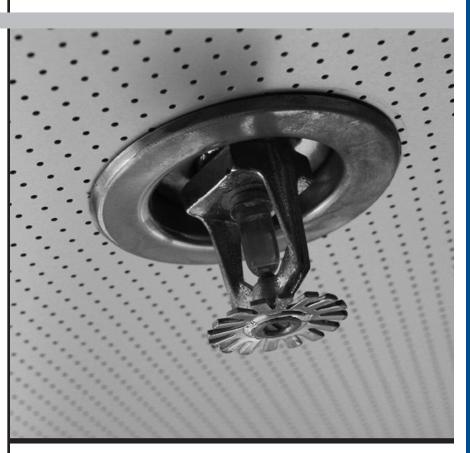

NFPA®†: National Fire Protection Association

A worldwide leader in providing fire, electrical, and life safety to the public since 1896. The mission of the international non-profit NFPA®† is to reduce the worldwide burden of fire and other hazards on the quality of life by providing and advocating scientifically-based consensus codes and standards, research, training and education. NFPA®† membership totals more than 75,000 individuals from around the world and more than 80 national trade and professional organizations.

For more information, go to www.nfpa.org.

EMERSON. CONSIDER IT SOLVED.™