

# Manifold Accessories

## Mani-Mount Manifold Mounting System\*


This installation method provides for rigid mounting of a Trifold or Rotofold manifold to a 2 inch pipe stand instead of a differential pressure transmitter. Only the manifold is mounted during construction, which permits storage of the transmitter until needed. The Mani-Mount not only provides a simple universal mounting solution, but also converts the manifold to a single flange design for direct mounting to the transmitter. The Mani-Mount can be used with any standard transmitter having 2 1/8" center to center process connections. Typical installation hardware costs are reduced because transmitter mounting brackets are not necessary.

*\*Available for Special Application Trifold 8122F8Y and Rotofold 8221F8Y models only*



### Features & Benefits

- Allows for rigid mounting of the manifold, instead of the transmitter.
- Simple universal mounting system for vertical, horizontal or either side of 2 inch pipe stand.
- Only the manifold needs to be mounted during construction; the transmitter can be securely stored until final installation.
- Transmitter mounting bracket is not necessary, reducing costs.
- Provides easy access to the transmitter by loosening 4 flange bolts.
- Fast installation process, saving time and money on costly conventional installations.
- Converts the manifold to a single flange style for direct mounting to the transmitter cell.
- Special High Tolerance NPT Thread

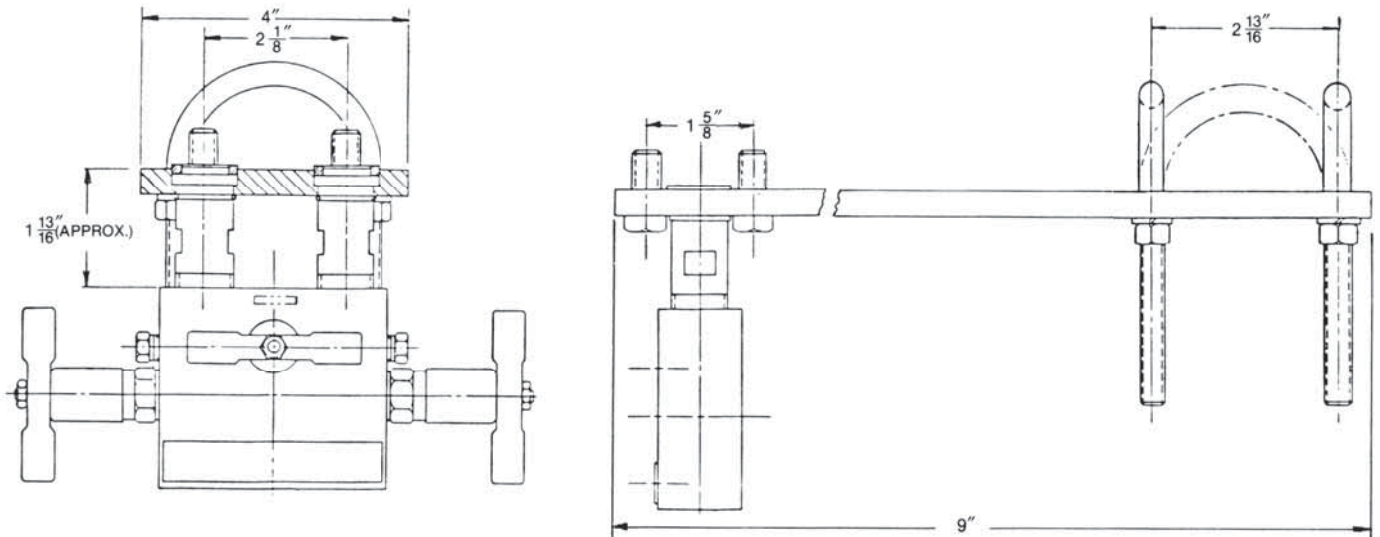

### How to Order Kit\*

PART NUMBER  
8200K9

\* manifold not included