

FITTINGS


Figure 316 Reducing Base Support Elbow Figure 315 Groove x Male Thread 90° Elbow Figure 320 Groove x Groove x Male Thread Tee

FITTINGS

| 316 Fabricated | | | | | |
|------------------------------|--------------------------------|-------------------------------|-------------------|----------------------------|------------------------------|
| Nominal Size Inches mm | Grooved End OD Inches mm | Center to End Inches mm | H Inches mm | B Dia. Threaded NPSC | Approx. Wt. Ea. Lbs Kg |
| 6 x 4 150 x 100 | 6.625 168.3 | 12.00 304.8 | 2.50 63.5 | 1.50 38.1 | 38.5 17.5 |
| 6 x 5 150 x 125 | 6.625 168.3 | 12.50 317.5 | 2.50 63.5 | 1.50 38.1 | 45.4 20.6 |
| 8 x 5 200 x 125 | 8.625 219.1 | 16.00 406.4 | 3.00 76.2 | 1.50 38.1 | 65.5 29.7 |
| 8 x 6 200 x 150 | 8.625 219.1 | 16.00 406.4 | 3.00 76.2 | 1.50 38.1 | 73.0 33.1 |
| 10 x 6 250 x 150 | 10.750 273.1 | 19.00 482.6 | 3.50 88.9 | 1.50 38.1 | 100.0 45.4 |
| 10 x 8 250 x 200 | 10.750 273.1 | 19.00 482.6 | 3.50 88.9 | 1.50 38.1 | 127.0 57.6 |
| 12 x 8 300 x 200 | 12.750 323.9 | 22.00 558.8 | 4.00 101.6 | 1.50 38.1 | 155.0 70.3 |
| 12 x 10 300 x 250 | 12.750 323.9 | 22.00 558.8 | 4.00 101.6 | 1.50 38.1 | 186.0 84.4 |



FIGURE 316 REDUCING BASE SUPPORT ELBOW GROOVED X FLANGED FABRICATED



| Nominal Size Inches mm | Pipe OD Inches mm | 315 Fabricated | | | 320 Fabricated | | |
|------------------------------|-------------------------|---------------------------------|---------------------------------|-----------------------------|---------------------------------|---------------------------------|-----------------------------|
| | | Nominal C to GE Inches mm | Nominal C to TE Inches mm | Approx Weight Lbs. Kg | Nominal C to GE Inches mm | Nominal C to TE Inches mm | Approx Weight Lbs. Kg |
| 1/4 32 | 1.660 42.4 | 2.75 69.9 | 2.75 69.9 | 1.0 0.5 | 2.75 69.9 | 2.75 69.9 | 1.5 0.7 |
| 1/2 40 | 1.900 48.3 | 2.75 69.9 | 2.75 69.9 | 1.2 0.5 | 2.75 69.9 | 2.75 69.9 | 1.9 0.9 |
| 2 50 | 2.375 60.3 | 3.25 82.6 | 4.25 108.0 | 2.3 1.0 | 3.25 82.6 | 4.25 108.0 | 3.2 1.5 |
| 2 1/2 65 | 2.875 73.0 | 3.75 95.3 | 3.75 95.3 | 3.7 1.7 | 3.75 95.3 | 3.75 95.3 | 4.0 1.8 |
| 3 80 | 3.500 88.9 | 4.25 108.0 | 6.00 152.4 | 6.5 2.9 | 4.25 108.0 | 6.00 152.4 | 6.0 2.7 |
| 4 100 | 4.500 114.3 | 5.00 127.0 | 7.25 184.2 | 11.0 5.0 | 5.00 127.0 | 7.25 184.2 | 11.0 5.0 |
| 5 125 | 5.563 141.3 | - | - | - | 5.50 139.7 | 5.50 139.7 | 23.0 10.5 |
| 6 150 | 6.625 168.3 | 6.50 165.1 | 6.50 165.1 | 19.8 9.0 | 6.50 165.1 | 6.50 165.1 | 23.0 10.5 |
| 8 200 | 8.625 219.1 | - | - | - | 7.75 196.9 | 7.75 196.9 | 38.7 17.6 |
| 10 250 | 10.750 273.0 | - | - | - | 9.00 228.6 | 9.00 228.6 | 72.1 32.8 |
| 12 300 | 12.750 323.9 | - | - | - | 10.00 254.0 | 10.00 254.0 | 92.5 42.0 |



FIGURE 320 GROOVE X MALE THREAD TEE FABRICATED

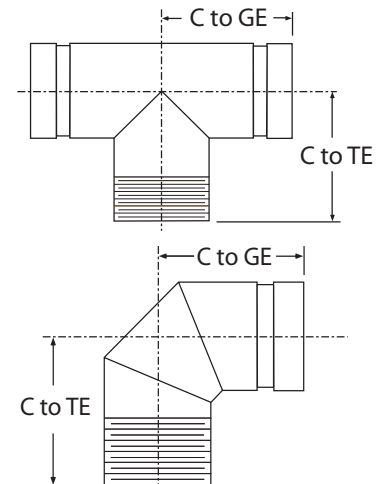


FIGURE 315 FABRICATED

Please refer to General Notes on page 17.