


CleanFLOW ball valves are engineered to be a true process piping component to specifically meet the demanding processes found in the pharmaceutical industries. The SB79 features Hastelloy construction along with full compliance with the latest ASME-BPE guidelines.

**Features**

**1/2 - 2"**

- ▲ Hastelloy-C Construction
- ▲ ASME-BPE compliant
- ▲ Drainable design with "Tube-ID" dimensions
- ▲ Weld bosses for easy purging on ends and body
- ▲ Encapsulated body seals to facilitate inline weldability without disassembly
- ▲ Integral ISO mounting pad to ISO-5211
- ▲ Full Range of versatile options

**HASTELLOY Type C-276 (UNSN10276).** □  
**ASTM A494-CW12MW**

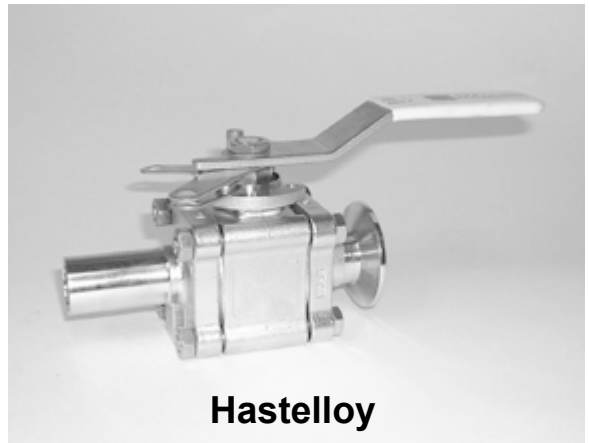

**Materials**

Item	Description	Material
1	Body	Hastelloy
2	Body Connector	Hastelloy
3	Ball	Hastelloy
4	Stem	Hastelloy
5	Seat	PTFE-TFM
6	Body Connector Seal	PTFE

**Dimensions & Weights (ins., lbs)**

Size	A	A1	B	C	D	E	Wt.
1/2"	3.50	5.50	4.49	4.50	0.37	1.78	1.50
3/4"	4.00	6.00	4.49	4.50	0.62	1.87	1.75
1"	4.50	6.50	5.75	5.75	0.87	2.40	3.20
1-1/2"	5.50	7.50	5.75	7.00	1.37	3.16	8.00
2"	6.25	8.00	7.00	7.00	1.87	3.35	13.00

