

Fig. 200WON - "Trimline" Adjustable Band Hanger w/o Swivel Nut

Size Range — 1/2" thru 8" pipe

Material — Carbon Steel

Function — Recommended for the suspension of fire sprinkler and non-insulated pipe or insulated pipe with Fig. 220 shield. Generally installed with two hex nuts.

Features — Flared edges on sizes 1/2" thru 2". Eases installation and protects CPVC pipe from any abrasion.


Approvals — Underwriters' Laboratories listed (1/2" thru 8") in the USA (**UL**) and Canada (**cUL**) for steel and CPVC plastic pipe. Conforms to Federal Specifications WW-171E, Type 7 and Manufacturers Standardization Society SP-69, Type 7

Maximum Temperature — 650°F

Finish — Mil. Galvanized to G-90

Note — Available in Stainless Steel materials

Order By — Figure number and pipe size

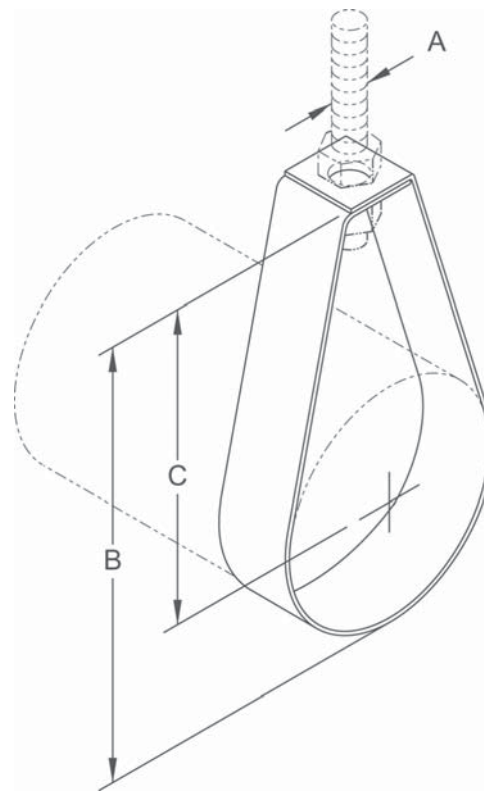

Dimensions • Weights

Pipe Size	Rod Size A	B	C	Max. Rec. Load Lbs.	Approx. Wt./100
1/2	3/8	2½	2	400	8
3/4	3/8	2½	2	400	8
1	3/8	2¾	2½	400	9
1¼	3/8	3¾	2½	400	10
1½	3/8	3½	2½	400	11
2	3/8	3¾	2½	400	12
2½	3/8	5½	3¾	600	24
3	3/8	5¾	3½	600	27
3½	3/8	6¾	4¾	600	32
4	3/8	6¾	4½	1000	33
5	1/2	8¾	5½	1250	60
6	1/2	9¾	6	1250	68
8	1/2	12¾	8	1250	130