


C-ODV

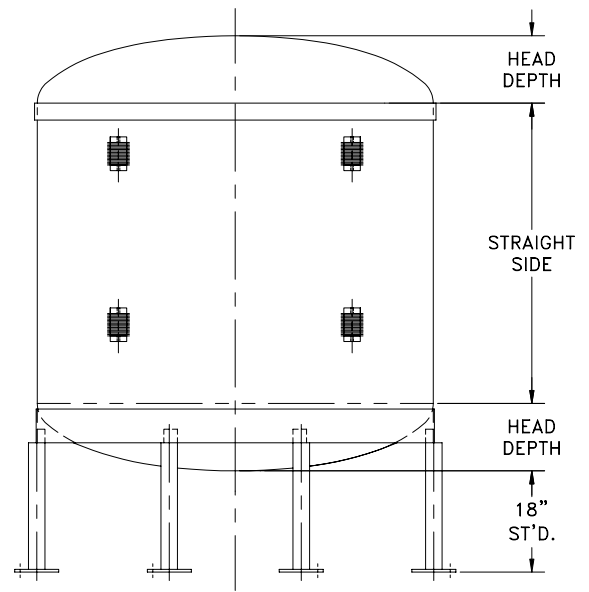

C-CDV

CAPACITIES (U.S. Gallons)

	ONE Section				STRAIGHT SIDE LENGTH (Inches)								TWO Section		
	24	30	36	42	48	54	60	66	72	78	84	90	96	108	120
24	51	62	74	86	97	109	121	132	144	155	167	178	190	213	237
30	83	102	121	139	158	177	196	215	234	254	273	293	312	345	383
36	110	134	159	184	209	234	260	286	312	338	364	391	417	455	506
42	167	203	239	275	312	348	385	421	458	496	533	570	608	671	744
48	210	255	300	345	391	437	482	529	575	622	668	716	763	840	931
54	292	352	411	471	530	590	649	709	768	828	887	947	1006	1125	1244
60	340	409	479	549	619	690	760	831	903	974	1046	1118	1191	1336	1483
66	455	544	633	722	810	899	988	1077	1166	1255	1344	1432	1521	1699	1877
72	524	627	729	832	935	1039	1143	1247	1352	1457	1562	1668	1774	1987	2202
84	751	891	1032	1174	1316	1458	1601	1745	1889	2033	2178	2324	2470	2763	3058
90	915	1081	1246	1411	1576	1742	1907	2072	2237	2403	2568	2733	2898	3229	3559
96	1022	1205	1389	1574	1759	1945	2131	2318	2505	2692	2880	3069	3258	3637	4019
108	1303	1529	1756	1983	2211	2439	2667	2896	3126	3356	3586	3817	4048	4512	4978
120	1726	2014	2304	2594	2884	3176	3467	3760	4053	4347	4641	4936	5231	5824	6420
132	1456	2581	2937	3292	3648	4003	4359	4714	5069	5425	5780	6136	6491	7202	7913
138	2399	2781	3164	3547	3930	4314	4699	5085	5470	5857	6244	6632	7020	7798	8579
144	2704	3127	3550	3975	4400	4826	5253	5681	6109	6539	6969	7400	7832	8698	9568
156	3312	3809	4305	4802	5298	5795	6291	6788	7284	7780	8277	8773	9270	10263	11256
168	3856	4407	4960	5513	6067	6622	7177	7734	8291	8848	9407	9967	10527	11650	12775

DIA. Inches	Gallons Per Inch	Head Depth	Head Capacity
24	1.93	4	5
30	3.14	5	10
36	4.19	6	14
42	6.06	7	26
48	7.58	8	34
54	9.90	9	55
60	11.80	10	66
66	14.80	11	100
72	17.46	12	120
84	24.02	14	194
90	27.53	15	255
96	31.66	16	292
108	38.72	18	403
120	49.49	20	577
132	59.22	22	804
138	64.82	23	878
144	72.39	24	1022
156	82.68	26	1327
168	93.08	28	1657

**General Notes:**

1. Diameters smaller than 72" are Contact Molded per ASTM D-4097.
2. Diameters 72" and larger are Filament Wound per ASTM D-3299.
3. Carbon steel primed pipe legs with floor pads.
4. Heavy powder coated carbon steel lifting lugs, as required for handling.

**OPTIONAL FEATURES**

- FRP Skirt Support
- Integral FLAT Top Head
- Flat Cover for Open Top (1 pc. / 2 pc. / 3 pc.)

**CAPACITIES (U.S. Gallons)**

Tank Nominal DIAMETER (Inches)	STRAIGHT SIDE LENGTH (Inches)														
	ONE Section												TWO Section		
	132	144	156	168	180	192	204	216	228	240	252	264	276	288	312
24	260														
30	421	459	498	537	576										
36	558	610	662	715											
42	817	891	966	1040	1115										
48	1024	1117	1210	1303											
54	1363	1482	1601	1720	1839	1958	2077	2196	2315	2434	2553	2672	2791	2910	3148
60	1597	1740	1883	2027	2171	2316	2461	2607	2754						
66	2054	2232	2410	2588	2765	2943	3121	3299	3476	3654	3832	4009	4187	4365	4720
72	2419	2637	2794	3005	3216	3429	3642	3855	4070	4285	4501	4718			
84	3355	3655	3873	4163	4454	4746	5038	5332	5627	5923	6220	6517			
90	3890	4220	4551	4881	5212	5542	5873	6203	6534	6864	7195	7525	7856	8186	8847
96	4402	4788	5175	5564	5956	6349	6744	6983	7364	7746	8129	8513	8898	9284	10059
108	5445	5915	6386	6859	7334	7811	8289	8770	9087	9553	10020	10488	10957	11427	12369
120	7018	7618	8221	8826	9434	10045	10658	11273	11667	12263	12860	13459	14059	14660	15865
132	8624	9335	10046	10757	11468	12178	12889	13600	14311	15022	15733	16444	17155	17866	19287
138	9361	10147	10934	11724	12516	13311	14108	14719	15499	16280	17062	17845	18630	19416	20991
144	10441	11317	12197	13080	13966	14856	15749	16646	17243	18114	18986	19860	20735	21612	23372
156	12249	13241	14234	15227	16220	17213	18206	19199	20192	21185	22178	23170	24163	25156	27142
168	13904	15037	16172	17310	18277	19397	20519	21643	22768	23894	25023	26152	27284	28417	30687