

TECHNICAL SPECIFICATIONS

DIN PN10, PN16

Flanged Ball Valves Sizes 1" - 6" (Series 410, 1"-4")

Series 300, 310, 410, 500XP, 610XP



1. SCOPE

Ball valves for corrosive chemical service used in construction of pressurized piping systems requiring DIN PN10, 16 flange connections.

2. SERVICE RATING

Temperature rating from -50 to 300° F as shown on pressure/temperature chart on the reverse side. See Catalog 1000 for temperature limits for specific chemicals.

3. MATERIALS OF CONSTRUCTION

- (1) **Body:** Compression molded thermoset (300, 310, 500XP, 610XP) and Engineered Thermoplastic Resin (410)
- (2) **Gland:** Hastelloy-C with integral locking plate.
- (3) **Stem:** Hastelloy-C metal insert with molded composite on all wetted surfaces.
- (4) **Gland Bolts:** Hastelloy-C
- (5) **Stem Packing:** PTFE V-Rings.
- (6) **Thrust Washer:** Glass and carbon-filled PTFE
- (7) **Insert:** Same material as body
- (8) **Seals:** PTFE-coated Viton O-ring.
- (9) **Ball:** Same material as body (except 300 GR/VE ball used in 310 and 300 body)
- (10) **Seats:** Virgin PTFE. Glass-filled and cavity-filler seats available.
- (11) **Handle:** PPA-FRP (1"-4"). Stainless Steel handle adapter (6"). All handles have locking provision.

4. DESIGN

- Valves shall be flanged and conform to the face-to-face dimensions of ANSI/ASME B16.10.
- Valve shall have integral 4-bolt mounting pads and threaded holes for actuator mounting.
- Stems shall be blowout proof.
- Valves shall have a regular port with ball dimensions as shown on Page 2.
- Flanges shall be flat-faced with serrated finish to allow installation in metallic, lined metal, FRP, and thermoplastic piping systems.
- Flange bolt sizes and spacing shall conform to DIN PN 10 or 16 where applicable.
- Disassembly, maintenance and replacement of any parts shall not require machining or bonding.
- Ball and stem strength shall be sufficient to operate with abrasive particles filling the cavity.

5. QUALITY ASSURANCE

- The Manufacturer's facility shall be certified to ISO 9001 or equivalent. The Manufacturer shall be certified to the European Pressure Equipment Directive (PED) and the "CE" mark shall be affixed to each valve label.
- Each valve shall be hydrostatically shell tested at no less than 1.43x its rated cold working pressure for 3 minutes.
- Each valve shall be seat tested with air at 20 and 80 psig. The seat test pressure shall be applied successively to each end of the closed valve with the other end open to the atmosphere. No visible leakage shall be permitted for the duration of the tests.


6. PACKING AND SHIPPING

Valves shall be shipped in a closed position with both ends capped to exclude dirt and properly boxed to avoid damage. Each valve shall be marked with the manufacturer, valve size, model, serial number, and valve component designations.



7. AVAILABILITY

Valves meeting this specification are available from:


Nil-Cor[®], LLC
4855 Broadmoor Ave.
Kentwood, MI 49512
P: 616-554-3100
F: 616-554-5623
www.nilcor.com

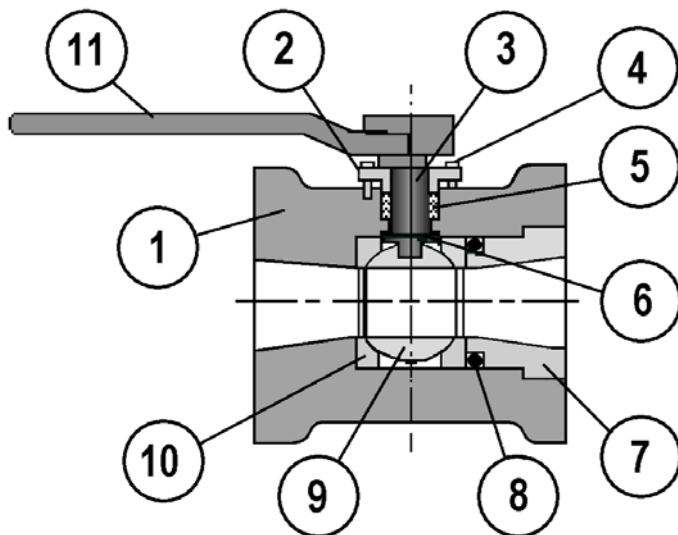

Pressure/Temperature Rating

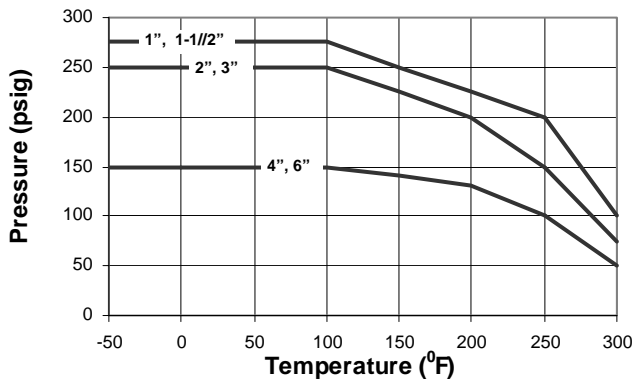

Note: Use 18" length of 1" sched. 40 pipe with 6" handle adapter

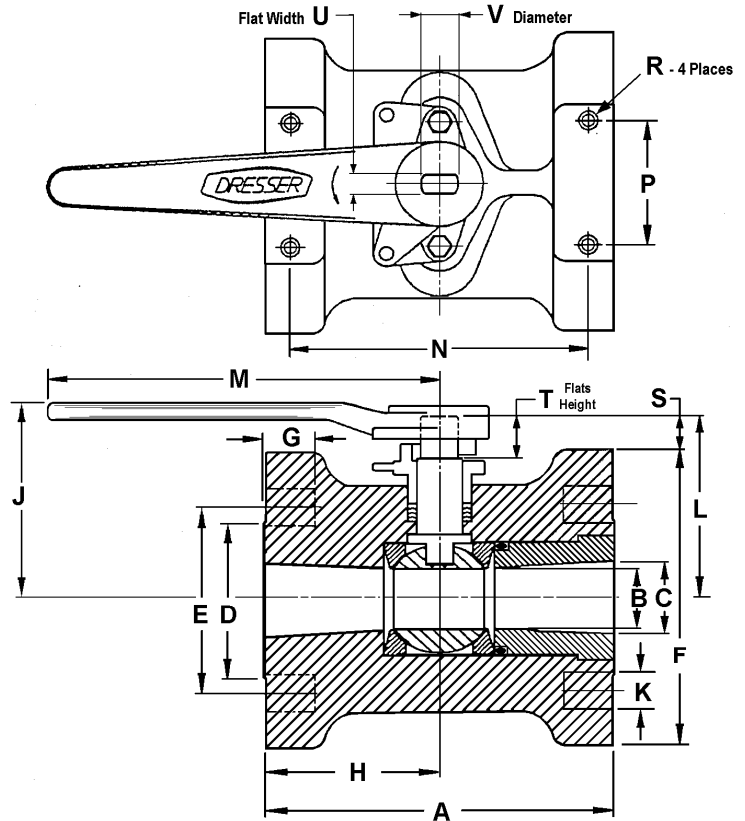

DIMENSIONS - All dimensions in inches, unless noted otherwise (mm)

SIZE	A	B	C	D	E*	F	G	H	J	K**	K (QTY)	L	M
1" (25 mm)	5.00	.88	1.00	2.25	85 mm	4.25	.88	2.50	3.08	14 mm	4	2.77	6.25
1-1/2" (40 mm)	6.50	1.25	1.50	3.00	110 mm	5.00	1.00	3.25	3.73	18 mm	4	3.55	6.25
2" (50 mm)	7.00	1.50	2.00	3.66	125 mm	6.00	1.00	3.50	4.18	18 mm	4	3.96	9.00
3" (80 mm)	8.00	2.31	3.00	5.00	160 mm	7.50	1.36	4.00	5.58	18 mm	4	5.42	9.00
4" (100 mm)	9.00	3.00	4.00	6.19	180 mm	9.00	1.50	4.50	7.05	18 mm	8	6.50	11.44
6" (150 mm)	10.50	4.50	6.00	8.50	240 mm	11.00	1.63	5.25	10.51	22 mm	8	7.91	*

*Flange bolt holes notched on size 1-1/2" (40 mm) due to larger bolts and BC for DIN compared to ANSI 150.

** All flange bolt holes drilled through.

Actuation Mounting Dimensions								Actuation Torque (in-lbs.)			Flow Coeff.	Weight
Valve Size	N	P	R x (deep ¹)	S	T	+0.000-.010 U	+0.000-.010 V	Valve Running Torque ⁽²⁾	Breakaway Torque ⁽³⁾			
									0-100 psi	100-275 psi	Max. Cv	(lbs.)
1	4.18	1.75	5/16 - 18 x 1/2	0.64	0.50	0.375	0.500	90	140	160	75	3
1-1/2	5.62	1.75	5/16 - 18 x 1/2	1.05	0.70	0.375	0.500	125	190	230	115	6
2	6.18	2.25	5/16 - 18 x 5/8	0.96	0.75	0.375	0.625	150	230	270	135	8
3	7.12	3.50	3/8 - 16 x 3/4	1.67	0.75	0.500	0.875	370	570	680	350	14
4	8.00	4.00	7/16 - 14 x 7/8	2.00	1.13	0.750	1.000	680	1040	1250	540	23
6	9.00	5.25	7/16 - 14 x 1-1/8	2.41	1.13	0.750	1.000	1400	2100	2400	1240	40

1. Minimum thread engagement required to develop design joint strength on the actuator mounting pad (composite valve body).
2. Flowing fluid, ball in motion between 0 and 90 deg.
3. Maximum breakaway torque for clean liquid service.