


Penn Machine

Class 6000 Socketweld Coupling





PENN CATALOG F2002 FIG NO. 16007
ASME-B16.11-2001

| NOMINAL PIPE SIZE | 1/8" | 1/4" | 3/8" | 1/2" | 3/4" | 1" | 1-1/4" | 1-1/2" | 2" | 2-1/2" | 3" | 4" |
|-------------------|-------|-------|-------|-------|--------|--------|--------|--------|--------|--------|--------|--------|
| "A" | 1-1/8 | 1-1/8 | 1-1/8 | 1-1/4 | 1-7/16 | 1-9/16 | 1-9/16 | 1-9/16 | 2-1/16 | 2-1/16 | 2-1/16 | 2-5/16 |
| "B" | 7/8 | 1 | 1-1/4 | 1-1/2 | 1-3/4 | 2 | 2-1/2 | 2-3/4 | 3-5/8 | 4-1/4 | 5 | 6 |
| "C" | .426 | .560 | .693 | .859 | 1.071 | 1.335 | 1.682 | 1.922 | 2.410 | 2.910 | 3.536 | 4.545 |
| "D" | 7/16 | 7/16 | 7/16 | 7/16 | 17/32 | 17/32 | 17/32 | 17/32 | 21/32 | 21/32 | 21/32 | 25/32 |
| "E" | .157 | .250 | .359 | .466 | .614 | .815 | 1.160 | 1.338 | 1.689 | 2.125 | 2.625 | 3.438 |
| APPROX. WEIGHT | .18 | .16 | .29 | .08 | .12 | 1.08 | 1.61 | 2.58 | 4.74 | 6.36 | 7.06 | 18.35 |

Penn Machine

Class 6000 Socketweld Reducer

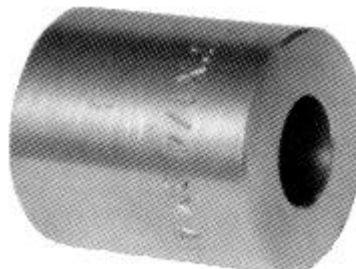

PENN CATALOG F2002 FIG NO. 16008
ASME-B16.11-2001

| NOMINAL PIPE SIZE | 1/8" | 1/4" | 3/8" | 1/2" | 3/4" | 1" | 1-1/4" | 1-1/2" | 2" | 2-1/2" | 3" | 4" |
|-------------------|-------|-------|-------|-------|--------|--------|--------|--------|--------|--------|--------|--------|
| "A" | 1-1/8 | 1-1/8 | 1-1/8 | 1-1/4 | 1-7/16 | 1-9/16 | 1-9/16 | 1-9/16 | 2-1/16 | 2-1/16 | 2-1/16 | 2-5/16 |
| "B" | 7/8 | 1 | 1-1/4 | 1-1/2 | 1-3/4 | 2 | 2-1/2 | 2-3/4 | 3-5/8 | 4-1/4 | 5 | 6 |
| "C" | .426 | .560 | .693 | .859 | 1.071 | 1.335 | 1.682 | 1.922 | 2.410 | 2.910 | 3.536 | 4.545 |
| "D" | 7/16 | 7/16 | 7/16 | 7/16 | 17/32 | 17/32 | 17/32 | 17/32 | 21/32 | 21/32 | 21/32 | 25/32 |
| APPROX. WEIGHT | .18 | .16 | .29 | .08 | .12 | 1.08 | 1.61 | 2.58 | 4.74 | 6.36 | 7.06 | 18.35 |

*The waterway bore of the reducer is determined by the schedule of the small end.

Web site created by Penn Machine. Send questions or comments to [James Friant](#).