


# PRODUCT SPECIFICATION DRAWING

## HOLDRITE® FLAME FIGHTER™ #221-S & #222-S

(25/50 Plenum rated)

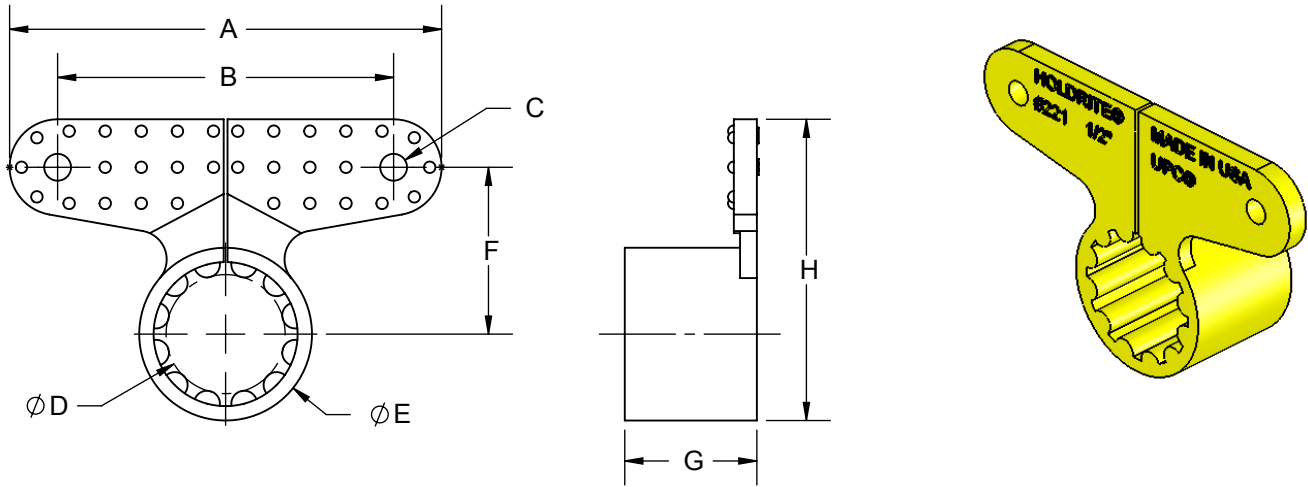


MODEL	SIZE	A	B	C	D	E	F	G	H
#221-S	1/2"	2.25	1.75	Ø.14	Ø.62	Ø.90	0.87	0.69	1.57
#222-S	3/4"	2.25	1.75	Ø.14	Ø.87	Ø1.17	0.89	0.69	1.72

All dimensions in inches. Dimensions (approximate)

**Fire retardant and low smoke plastic clamp for 1/2" and 3/4" tubing. Meets ASTM E-84 25/50 and UL94V-0. Helps to minimize noise transfer and isolates against dissimilar metal contact. Compatible with Copper, PEX, CPVC and other tubing.**

### Product Information:

- Material: Kynar Flex, yellow, UL94V-0
- Temperature range: -20°F to +200°F
- Meets ASTM E-84 25/50 & UL94V-0
- UPC / IPC / IAPMO listed



THIS INFORMATION IS PROPRIETARY TO HUBBARD ENTERPRISES AND IS SUBJECT TO CHANGE WITHOUT NOTICE. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF HUBBARD ENTERPRISES IS PROHIBITED.

.....HUBBARD ENTERPRISES.....  
**HOLDRITE®**  
*"Converting Makeshift Methods into Engineered Solutions"*

Product Submittal	
Job Name:	
Date:	
Part Number:	Qty:
Architect / Owner:	
Contractor:	
Notes:	