

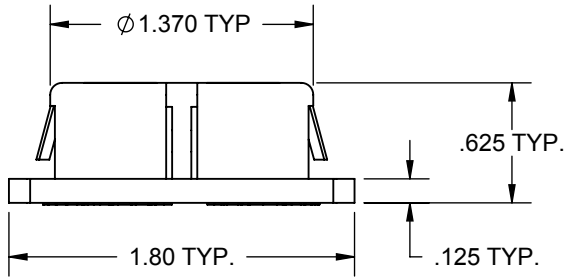


PRODUCT SPECIFICATION DRAWING


HOLDRITE® #404-R, #405-R & #406-R

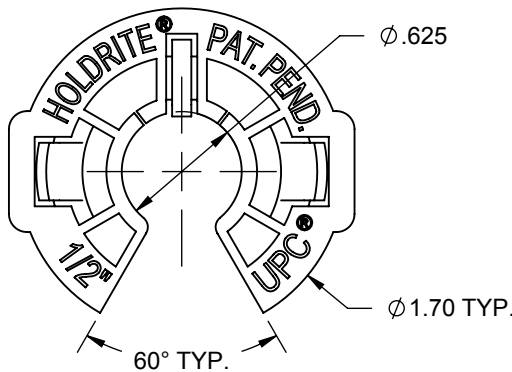


ALL DIMENSIONS IN INCHES



#404-R

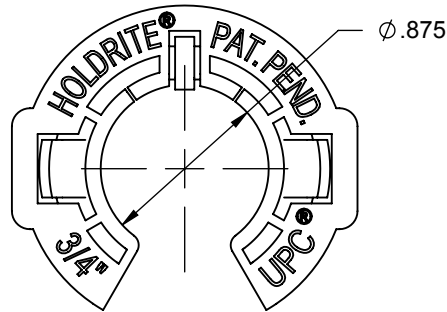

#405-R

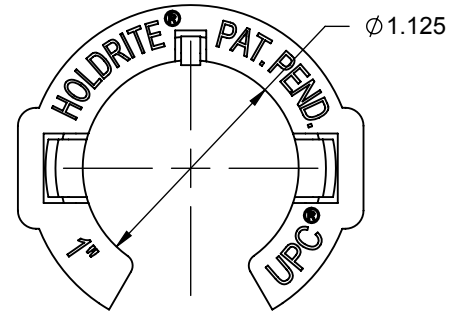


#406-R

Fire retardant plastic insert for 1/2", 3/4" and 1" CTS tubing. Fits in 1-3/8" hole in metal framing. Designed for use up to 14 gage metal penetrations. Ideal for isolation of Copper, PEX or CPVC tubing in fire rated environments.

Product Information:

- Material: Polyethylene, blue, FR UL94V-2
- Rated to 180 °F service temperature
- UPC / IPC / IAPMO listed



THIS INFORMATION IS PROPRIETARY TO HUBBARD ENTERPRISES AND IS SUBJECT TO CHANGE WITHOUT NOTICE. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF HUBBARD ENTERPRISES IS PROHIBITED.

.....HUBBARD ENTERPRISES.....
HOLDRITE®
 "Converting Makeshift Methods into Engineered Solutions"

Product Submittal	
Job Name:	
Date:	
Part Number:	Qty:
Architect / Owner:	
Contractor:	
Notes:	