



Orwak LE FL

Benefits

- Savings on your waste collection
- Tidy premises
- Space saving
- Improves the workplace environment

Features


- Lightweight, strong and hygienic aluminium structure
- Quiet operation
- Front-loading
- Compacts waste into bags, standard containers or bales
- Easy and safe to use



Technical specifications

Dimensions

	FL80	FL100
A:	2350 mm	2350 mm
B:	810 mm	960 mm
C:	810 mm	810 mm
D:	1060 mm	1060 mm
E:	1210 mm	1360 mm

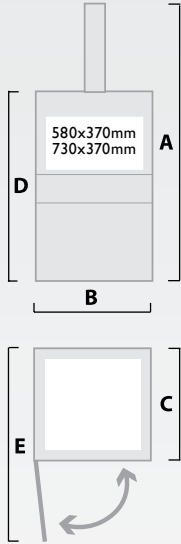

Loading aperture

Width: 580/730* mm
Height: 370/370* mm

Cycle time

34 secs

Press force

1.5 ton, 15 kN, per cm² 1.2 kg
Bin size 240/370* litre

Weight (machine)

Total: 102/109* kg

Noise level

< 55 db (A)

Protection class

IP 55

Operating power

Single Phase 230 V, 50 Hz, 5 A
115 V, 60 Hz, 5 A

Anodized aluminium structure

Oil volume/type
2,5 l ISO VG 32-68 SAE 10
from 5° C and warmer

Hydraulical data

Working pressure: 60 bar
Relief pressure: 80 bar
Press force: 1.5 ton, 15 kN
Piston stroke: 600 mm

*FL-100

Orwak LE


Based on an ingenious modular system and made from maintenance-free aluminium. Easy to feed waste material through large front loading door.



Choose FL80 for 240 l bins and FL100 for up to 370 l bins.



The optional BOB (Bag Or Bale) trolley for easy compacting of light waste material into bags or bales.

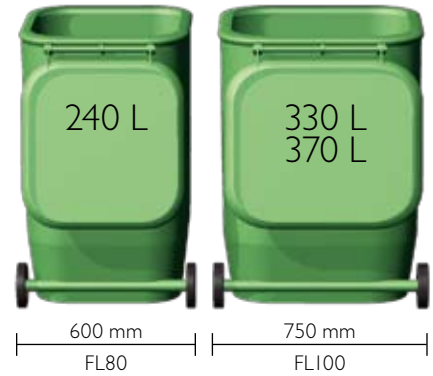

Our promise to You!

- Orwak financial solutions
- Orwak non-stop service

For further information please contact Your local Orwak dealer.

The Orwak LE FL takes care of most of your waste

Paper

- Cardboard
- Shredded
- Paper sacks

Metal Cans

- Aluminium cans
- Food cans
- Paint cans

Other metals

- Steel straps

Plastic foil

- Shrink film
- Plastic bags

Plastic containers

- PET bottles
- Jugs/bottles

Other plastics

- Plastic straps

Semi-dry Waste

- Bagged general waste

Wet

- Juice boxes,
- Tetra paks

Special

- Steel drums
- Hazardous waste

● Perfect choice ● OK Other materials contact us

For more info. contact us or visit our website www.orwak.com
We reserve the right to make changes to specifications without prior notice.
Bale/bin weights are dependent upon material type.

AB Orwak

Box 58, SE-576 22 Sävsjö, Sweden
Tel: +46 382-157 00, Fax: +46 382-106 07
E-mail: info@orwak.se



Making sure less is more

www.orwak.com