



BAL650C-2

FLUORESCENT EMERGENCY BALLAST

Economical alternative for one 2-pin compact fluorescent lamp (with integral starter)



APPLICATION


The BAL 650C-2 fluorescent emergency ballast works in conjunction with the AC ballast to convert new or existing compact fluorescent fixtures into emergency lighting. The emergency ballast consists of a high-temperature nickel cadmium battery, charger and electronic circuitry in one compact red case. This ballast can be used with most 10W through 26W compact fluorescent lamps with integral starters, including (2-pin) quad or triple twin-tube compacts. It is also compatible with most electronic, standard, and energy-saving AC ballasts. If used in an emergency-only fixture, no AC ballast is necessary. The BAL 650C-2 is not suitable for use in air handling heated air outlet fixtures, and wet or hazardous location fixtures. For information about specific lamps and ballast compatibility, please call the factory.

OPERATION

When AC power fails, the BAL 650C-2 immediately switches to the emergency mode operating one lamp at full light output for the first few seconds to start the lamp, then at reduced lumen output for a minimum of 90 minutes. When AC power is restored, the BAL 650C-2 automatically returns to the charging mode.

INSTALLATION

The BAL 650C-2 does not affect normal fixture operation and may be used with either a switched or unswitched fixture. If an switched fixture is used, an unswitched hot lead must be connected to the emergency ballast. The emergency ballast must be fed from the same branch circuit as the AC ballast. The BAL 650C-2 may be easily installed with a variety of compact fluorescent fixtures; however, some fixtures may not accommodate emergency equipment. In these situations, the BAL 650C-2 may be remote-installed up to half the distance the AC ballast manufacturer recommends removing the AC ballast from the lamp, or up to 50 feet, whichever is less. For installation on top of the fixture, model BAL 650C-2 provides two feet of flexible conduit at each end of the ballast. Installation is not recommended with fixtures where the ambient temperature may fall below 0°C for extended periods. For simple visual inspection of the charging indicator light and operational testing, the test switch/monitor plate may be installed in the ceiling near the fixture or remote-installed by the fixture's wall switch.

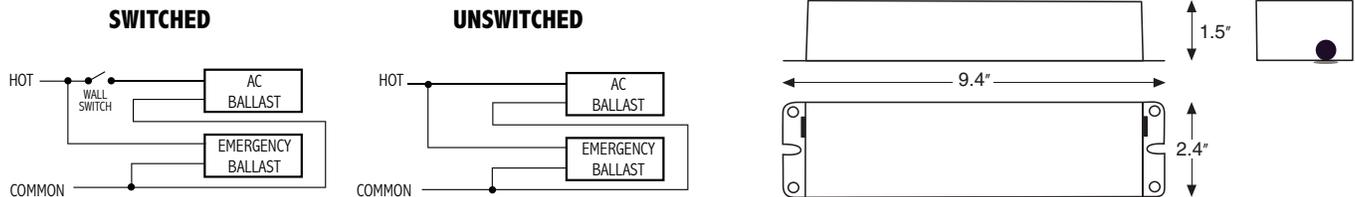

Primary circuit only. Lamp leads not shown.

UL AND CODE COMPLIANCE

The BAL650C-2 has been tested by Underwriters Laboratories in accordance with the standards set forth in UL 924, "Emergency Lighting and Power Equipment," and is UL Listed for factory or field installation. Emergency illumination time exceeds the National Electrical Code (NEC), Life Safety Code (NFPA-LSC) and UL 90-minute requirements.

BATTERY

Since high temperatures exist in fluorescent fixtures, the BAL 650C-2 uses a specially constructed, high-temperature nickel cadmium battery. This battery requires no maintenance, and has a life expectancy of 7 to 10 years.

EMERGENCY ILLUMINATION

Depending on the wattage and type of lamps selected, the BAL 650C-2 produces 300 to 650 lumens of emergency initial light output. During emergency illumination, one lamp is illuminated, even if installed with a multilamp AC ballast.



SPECIFICATION

Emergency lighting shall be provided by using a quad or triple twin-tube compact fluorescent fixture equipped with a BAL 650C-2 emergency ballast. This emergency ballast shall consist of a high-temperature, maintenance-free nickel cadmium battery, charger and electronic circuitry contained in one 9 3/8" x 2 3/8" x 1 1/2" white metal case with two feet of flexible conduit at each end of the ballast. A test switch/monitor plate with test switch and charging indicator light shall be provided to monitor the charger and battery. The emergency ballast shall be capable of operating one 10W – 26W Quad or Triple tube 2-pin compact fluorescent lamp (with no Integral starter) in the emergency mode for a minimum of 90 minutes. The BAL 650C-2 shall have 3.5 Watts of input power, a 14.4 Watt-hour battery capacity, and comply with emergency standards set forth by the current NEC. The emergency ballast shall be UL Listed for installation inside, on top of, or remote from the fixture, warranted for a full five years from date of purchase, and made in the U.S.A.

WARRANTY

Model BAL 650C-2 is warranted for five (5) full years from date of purchase. This warranty covers only properly installed BEST emergency ballasts used under normal conditions. For the warranty period Best will, at its option, repair or replace without charge a defective emergency ballast, provided it is returned to the factory transportation prepaid, and our inspection determines it to be defective under terms of the warranty. Repair or replacement, as stated above, shall constitute the purchaser's exclusive warranty, which does not extend to transportation, installation, labor or any other charges; nor does it apply to any equipment of another manufacturer used in conjunction with the emergency ballast.

PRODUCT SUMMARY

UL LISTED Factory or Field Installation	DUAL VOLTAGE INPUT 120/277 VAC 60 Hz	BATTERY High-Temperature Maintenance-Free Nickel-Cadmium Battery 7-10 Year Life Expectancy	TEMPERATURE RATING (AMBIENT) 0°C TO +55°C (32°F TO 131°F)
ILLUMINATION 90 Minutes	AC INPUT CURRENT 280mA	BATTERY CHARGING CURRENT 270mA	DIMENSIONS 9.4" x 2.4" x 1.5" (238mm x 60mm x 38mm) 2' (610mm) Flexible conduit Mounting center 8.9" (226mm)
INITIAL LIGHT OUTPUT 300-650 Lumens	AC INPUT POWER RATING 3.5 Watts	RECHARGE TIME 24 Hours	WEIGHT 2.1 lbs (1 kg)
FULL WARRANTY 5 Years (NOT pro-rata)	TEST SWITCH Single pole	CHARGING INDICATOR LIGHT LED	

BAL650C-2

FLUORESCENT EMERGENCY BALLAST
Economical alternative for one 2-pin compact fluorescent lamp (with integral starter)

