


- **Sales Tip:** Use in toughest industrial environments where worker fatigue prevention is most critical. Ideal for multi-shift environments.
- **Where to Specify:** Any work cell where worker is at the station for prolonged periods of time.

- One of the 4 most comfortable mats available for dry area applications.
- Durable vinyl diamond-plate top surface is combined with dense closed cell foam base utilizing NOTRAX® exclusive UniFusion™ technology.
- UniFusion™ bond guaranteed for the life of the mat – See warranty for details
- Overall mat thickness is a full ONE-INCH.
- Sloped beveled foam on all 4 undersides affords easy access onto and off of mat.
- Manufacturer's warranty of 3 years is provided.
- Custom widths available



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® INDUSTRIAL MATS

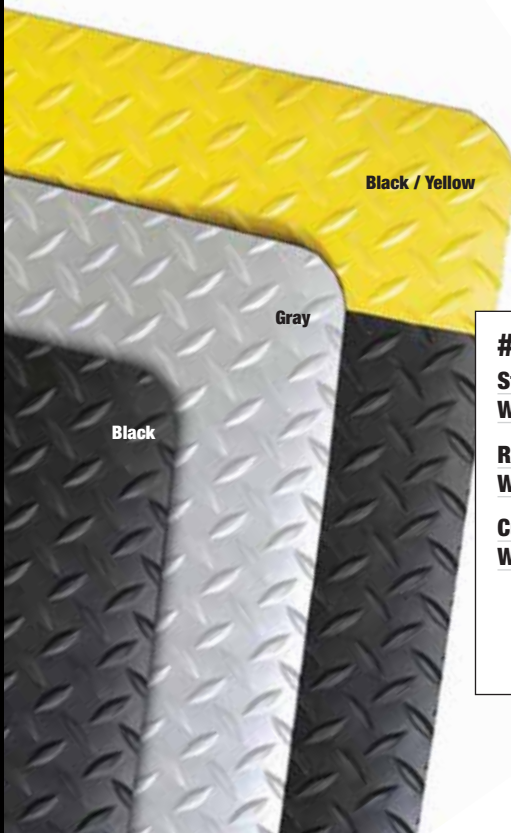

#979 SADDLE TRAX™

	2' x 3'	3' x 5'	3' x 12'	Custom Widths
<b>Stock Sizes</b>	2' x 3'	3' x 5'	3' x 12'	Custom Widths
<b>Weight (lbs.)</b>	12	30	72	2.0/sq.ft.
<b>Roll Sizes</b>	2' x 75'	3' x 75'	4' x 75'	
<b>Weight (lbs.)</b>	300	450	600	
<b>Custom Sizes</b>	2' Widths	3' Widths	4' Widths	5' Widths
<b>Weight (lbs.)</b>	2.0/sq.ft.	2.0/sq.ft.	2.0/sq.ft.	2.0/sq.ft.


Shipping Location: Superior Manufacturing Group - Moselle, MS 39459  
 \* For applications on carpeted, finished or polished surfaces, Mat Hold (090 – pg.63) is recommended to minimize mat movement






- **Sales Tip:** Easy to sweep clean or damp mop top surface. Recommend where there is attention to fatigue prevention and concern for the mat to match a décor.
- **Where to Specify:** Lab testing areas, Check-out counters, Order fulfillment lines, Pharmacies.

- One of the 4 most comfortable mats available for dry area applications.
- Smooth marble-pattern top surface of heavy-duty rubber is combined with dense closed cell foam base utilizing NOTRAX® exclusive UniFusion™ technology.
- UniFusion™ bond guaranteed for the life of the mat – See warranty for details
- Overall mat thickness is a full ONE-INCH.
- Sloped beveled foam on all 4 undersides affords easy access onto and off of mat.
- Manufacturer's warranty of 3 years is provided.
- Custom widths available



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NOTRAX® INDUSTRIAL MATS

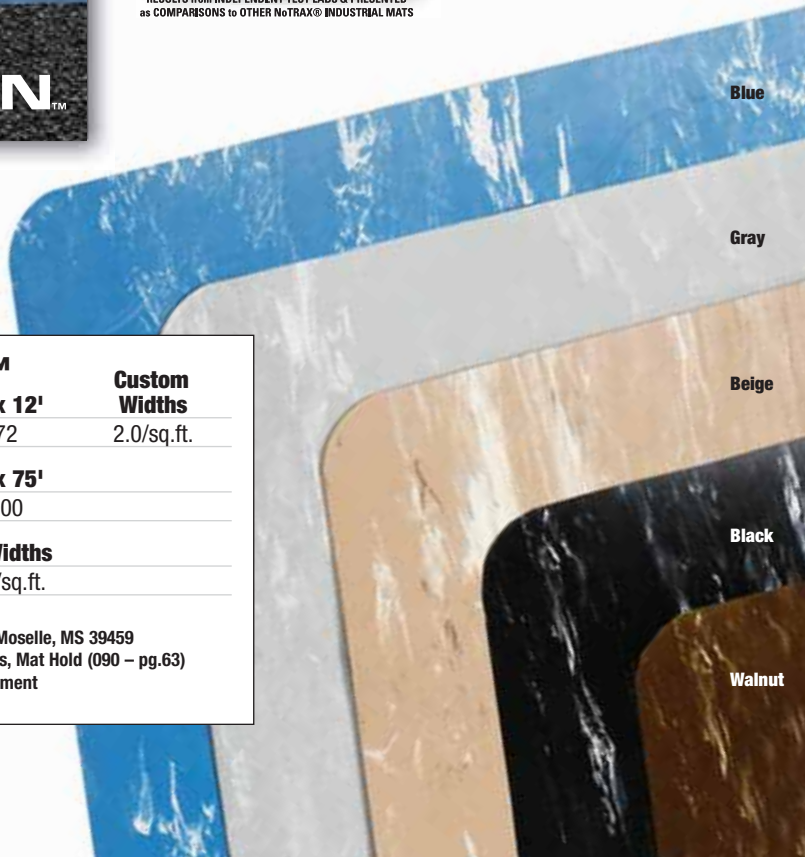

#970 MARBLE SOF-TYLE™ GRANDE™				
<b>Stock Sizes</b>	<b>2' x 3'</b>	<b>3' x 5'</b>	<b>3' x 12'</b>	<b>Custom Widths</b>
<b>Weight (lbs.)</b>	12	30	72	2.0/sq.ft.
<b>Roll Sizes</b>	<b>2' x 75'</b>	<b>3' x 75'</b>	<b>4' x 75'</b>	
<b>Weight (lbs.)</b>	300	450	600	
<b>Custom Sizes</b>	<b>2' Widths</b>	<b>3' Widths</b>	<b>4' Widths</b>	
<b>Weight (lbs.)</b>	2.0/sq.ft.	2.0/sq.ft.	2.0/sq.ft.	

Shipping Location: Superior Manufacturing Group - Moselle, MS 39459  
 \* For applications on carpeted, finished or polished surfaces, Mat Hold (090 – pg.63) is recommended to minimize mat movement



- **Sales Tip:** Rubber top resists exposure to sparks from welding. Easy to clean non-directional top surface. Ideal for multi-shift environments.
- **Where to Specify:** Welding locations; work cells that are subjected to extreme traffic.

- One of the 4 most comfortable mats available for dry area applications.
- Pebble-embossed top surface of resilient SBR rubber is combined with dense closed cell foam base utilizing NOTRAX® exclusive UniFusion™ technology.
- UniFusion™ bond guaranteed for the life of the mat – See warranty for details
- Overall mat thickness is a full ONE-INCH.
- Sloped beveled foam on all 4 undersides affords easy access onto and off of mat.
- Manufacturer's warranty of 3 years is provided.
- Custom widths available



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NOTRAX® INDUSTRIAL MATS



Black

#980 PEBBLE TRAX® GRANDE™

Stock Sizes	2' x 3'	3' x 5'	3' x 12'	Custom Widths		
Weight (lbs.)	12	30	72	2.0/sq.ft.		
Roll Sizes & Custom Sizes	2' x 75'	3' x 75'	4' x 75'	2' Widths	3' Widths	4' Widths
Weight (lbs.)	180	270	360	2.0/sq.ft.	2.0/sq.ft.	2.0/sq.ft.

Shipping Location: Superior Manufacturing Group - Moselle, MS 39459


\* For applications on carpeted, finished or polished surfaces, Mat Hold (090 - pg.63) is recommended to minimize mat movement






- **Sales Tip:** Ribs run the length of the mat. Rubber top resists exposure to sparks from welding. Ideal for multishift environments.
- **Where to Specify:** All busy work cells that require more slip resistance than average.

- One of the 4 most comfortable mats available for dry area applications.
- Corrugated ribbed top surface of resilient SBR rubber is combined with dense closed cell foam base utilizing NOTRAX® exclusive UniFusion™ technology.
- UniFusion™ bond guaranteed for the life of the mat – See warranty for details
- **Overall mat thickness is a full ONE-INCH.**
- Sloped beveled foam on all 4 undersides affords easy access onto and off of mat.
- Manufacturer's warranty of 3 years is provided.
- Custom widths available



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NOTRAX® INDUSTRIAL MATS

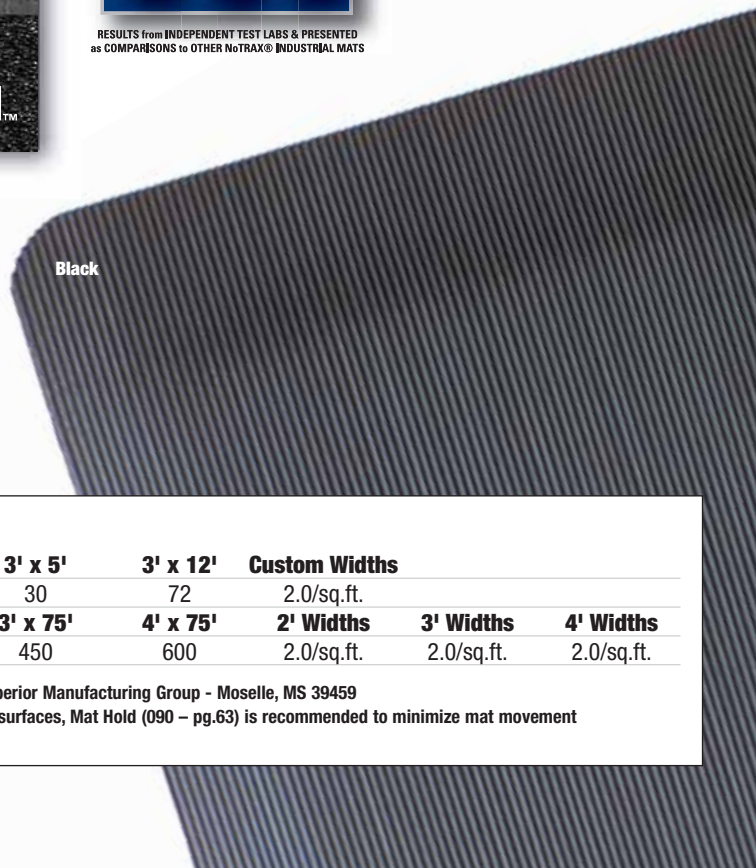

<b>#974 ERGO MAT™ GRANDE™</b>						
<b>Stock Sizes</b>	<b>2' x 3'</b>	<b>3' x 5'</b>	<b>3' x 12'</b>	<b>Custom Widths</b>		
<b>Weight (lbs.)</b>	12	30	72	2.0/sq.ft.		
<b>Roll Sizes &amp; Custom Sizes</b>	<b>2' x 75'</b>	<b>3' x 75'</b>	<b>4' x 75'</b>	<b>2' Widths</b>	<b>3' Widths</b>	<b>4' Widths</b>
<b>Weight (lbs.)</b>	300	450	600	2.0/sq.ft.	2.0/sq.ft.	2.0/sq.ft.

Shipping Location: Superior Manufacturing Group - Moselle, MS 39459

\* For applications on carpeted, finished or polished surfaces, Mat Hold (090 – pg.63) is recommended to minimize mat movement




# CUSHION TRAX®

- **Sales Tip:** Diamond surface provides non-directional slip resistance.
- **Where to Specify:** Machine operating stations needing fatigue prevention and sure footing.

- Durable vinyl diamond-plate top surface is combined with dense closed cell foam base utilizing NOTRAX® exclusive UniFusion™ technology.
- UniFusion™ bond guaranteed for the life of the mat – See warranty for details
- Overall mat thickness is 9/16 inch.
- Sloped beveled foam on all 4 undersides affords easy access onto and off of mat.
- Custom widths available



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NOTRAX® INDUSTRIAL MATS



## #479 CUSHION TRAX™

Stock Sizes	2' x 3'	3' x 5'	3' x 12'	Custom Widths
Weight (lbs.)	9	20	48	1.36/sq.ft.
Roll Sizes	2' x 75'	3' x 75'	4' x 75'	
Weight (lbs.)	215	320	425	
Custom Sizes	2' Widths	3' Widths	4' Widths	5' Widths
Weight (lbs.)	1.36/sq.ft.	1.36/sq.ft.	1.36/sq.ft.	1.36/sq.ft.

Shipping Location: Superior Manufacturing Group - Moselle, MS 39459  
 \* For applications on carpeted, finished or polished surfaces, Mat Hold (090 – pg.63) is recommended to minimize mat movement


SAFETY / ANTI-FATIGUE • "DRY • BEST"






- **Sales Tip:** Easy to sweep clean or damp mop top surface. Recommended where there is a minimal amount of debris in the environment and a concern for the mat to match a décor.
- **Where to Specify:** Lab testing areas, Check-out counters, Order fulfillment lines.

- Smooth marble-pattern top surface of heavy-duty rubber is combined with dense closed cell foam base utilizing NOTRAX® exclusive UniFusion™ technology.
- UniFusion™ bond guaranteed for the life of the mat – See warranty for details
- Overall mat thickness is 1/2 inch.
- Sloped beveled foam on all 4 undersides affords easy access onto and off of mat.
- Custom widths available



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NOTRAX® INDUSTRIAL MATS

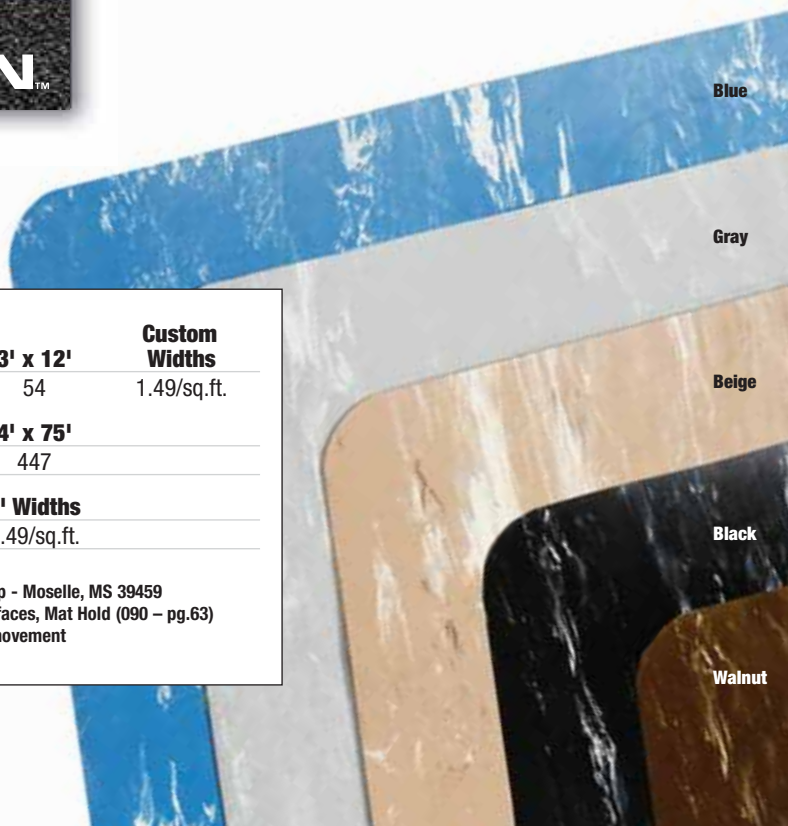

#470 MARBLE SOF-TYLE™				Custom Widths
<b>Stock Sizes</b>	<b>2' x 3'</b>	<b>3' x 5'</b>	<b>3' x 12'</b>	
<b>Weight (lbs.)</b>	9	23	54	1.49/sq.ft.
<b>Roll Sizes</b>	<b>2' x 75'</b>	<b>3' x 75'</b>	<b>4' x 75'</b>	
<b>Weight (lbs.)</b>	224	335	447	
<b>Custom Sizes</b>	<b>2' Widths</b>	<b>3' Widths</b>	<b>4' Widths</b>	
<b>Weight (lbs.)</b>	1.49/sq.ft.	1.49/sq.ft.	1.49/sq.ft.	

Shipping Location: Superior Manufacturing Group - Moselle, MS 39459  
 \* For applications on carpeted, finished or polished surfaces, Mat Hold (090 - pg.63) is recommended to minimize mat movement




- **Sales Tip:** Rubber top resists exposure to sparks from welding. Easy to clean nondirectional top surface.
- **Where to Specify:** Welding locations.

- Pebble-embossed top surface of resilient SBR rubber is combined with dense closed cell foam base utilizing NOTRAX® exclusive UniFusion™ technology.
- UniFusion™ bond guaranteed for the life of the mat – See warranty for details
- Overall mat thickness is 1/2 inch.
- Sloped beveled foam on all 4 undersides affords easy access onto and off of mat.
- Custom widths available



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NOTRAX® INDUSTRIAL MATS

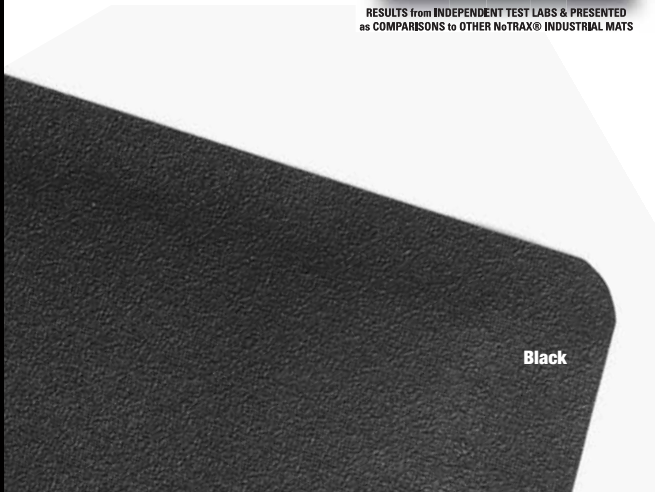

#480 PEBBLE TRAX®

Stock Sizes	2' x 3'	3' x 5'	3' x 12'	Custom Widths		
Weight (lbs.)	9	20	50	1.17/sq.ft.		
Roll Sizes & Custom Sizes	2' x 75'	3' x 75'	4' x 75'	2' Widths	3' Widths	4' Widths
Weight (lbs.)	176	264	351	1.17/sq.ft.	1.17/sq.ft.	1.17/sq.ft.

Shipping Location: Superior Manufacturing Group - Moselle, MS 39459


\* For applications on carpeted, finished or polished surfaces, Mat Hold (090 – pg.63) is recommended to minimize mat movement





- **Sales Tip:** *Ribs run the length of the mat. Rubber top resists exposure to sparks from welding.*
- **Where to Specify:** *Any work cell that requires added slip resistance.*

- Corrugated ribbed top surface of resilient SBR rubber is combined with dense closed cell foam base utilizing NOTRAX® exclusive UniFusion™ technology.
- UniFusion™ bond guaranteed for the life of the mat – See warranty for details
- Overall mat thickness is 1/2 inch.
- Sloped beveled foam on all 4 undersides affords easy access onto and off of mat.
- Custom widths available



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NOTRAX® INDUSTRIAL MATS



Black

**#474 ERGO MAT™**

Stock Sizes	2' x 3'	3' x 5'	3' x 12'	Custom Widths		
Weight (lbs.)	9	20	50	1.31/sq.ft.		
Roll Sizes & Custom Sizes	2' x 75'	3' x 75'	4' x 75'	2' Widths	3' Widths	4' Widths
Weight (lbs.)	210	310	415	1.31/sq.ft.	1.31/sq.ft.	1.31/sq.ft.

Shipping Location: Superior Manufacturing Group - Moselle, MS 39459

\* For applications on carpeted, finished or polished surfaces, Mat Hold (090 – pg.63) is recommended to minimize mat movement





- **Sales Tip:** The only mid-priced/high performance anti-fatigue sponge mat available; durability approaching that of competitive "laminated" mats. Extends service life by 50%.
- **Where to Specify:** Four top patterns to fit the needs of work stations where longer lasting fatigue protection is required.


- Unlike urethane or acrylic top coats that are applied after the mat is produced, Dyna-Shield® is manufactured into the mat to provide a long-wearing protection to the sponge anti-fatigue mat - Outperforms competitive products in tear resistance and tensile strength.
- Four designs of Dyna-Shield® sponge mats feature a 1/2 inch thickness.
- All four sides are beveled to minimize trip hazards.



**DYNA-SHIELD®**



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® INDUSTRIAL MATS

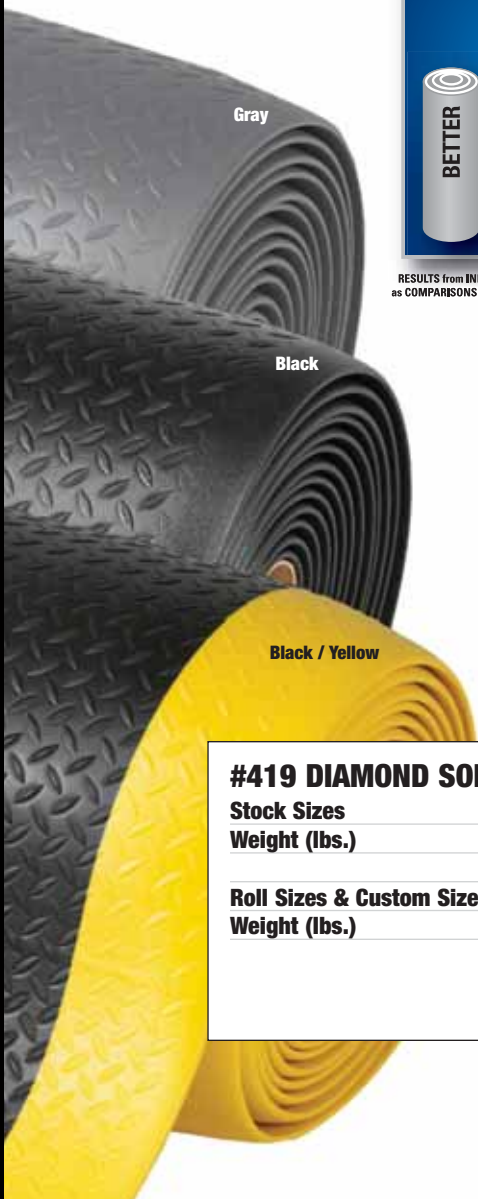

**#419 DIAMOND SOF-TRED™ (& #406,#413,#417)**

<b>Stock Sizes</b>	<b>2' x 3'</b>	<b>2' x 6'</b>	<b>3' x 4'</b>	<b>3' x 5'</b>	<b>3' x 6'</b>	<b>3' x 12'</b>
<b>Weight (lbs.)</b>	5	9.7	10	12.2	14.4	28.5
<b>Roll Sizes &amp; Custom Sizes</b>	<b>2' x 60'</b>	<b>3' x 60'</b>	<b>4' x 60'</b>	<b>2' Widths</b>	<b>3' Widths</b>	<b>4' Widths</b>
<b>Weight (lbs.)</b>	94	151	184.5	.78/sq.ft.	.78/sq.ft.	.78/sq.ft.


Shipping Location: Superior Manufacturing Group - Moselle, MS 39459





**RAZORBACK® w/DYNA-SHIELD®**

**#406**

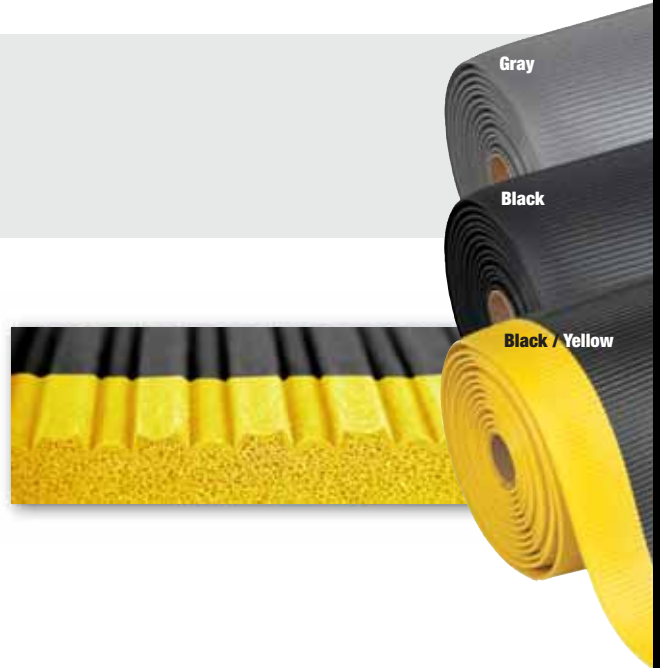

**BLADE RUNNER® w/DYNA-SHIELD®**

**#413**



**BUBBLE SOF-TRED™ w/DYNA-SHIELD®**

**#417**



# PEBBLE STEP SOF-TRED™

w/DYNA-SHIELD®

- **Sales Tip:** Offers better than average fatigue relief in a mat that outlasts traditional "sponge" matting.
- **Where to Specify:** Work stations where the need for longer lasting fatigue protection is required.

- Pebble-embossed PVC sponge manufactured with NOTRAX® exclusive Dyna-Shield® protective top layer - Outperforms competitive products in tear resistance and tensile strength.
- Non-directional top surface ensures excellent traction while remaining easy to clean.
- Overall thickness is 3/8 inch.
- All four sides are beveled to minimize trip hazards.



## #415 PEBBLE STEP SOF-TRED™

Stock Sizes	2' x 3'	2' x 6'	3' x 4'	3' x 5'	3' x 6'	3' x 12'
Weight (lbs.)	4.1	7.56	7.56	10.2	12	23.7
Roll Sizes & Custom Sizes	2' x 60'	3' x 60'	4' x 60'	2' Widths	3' Widths	4' Widths
Weight (lbs.)	76	114.6	150.9	.64/sq.ft.	.64/sq.ft.	.64/sq.ft.

Shipping Location: Superior Manufacturing Group - Moselle, MS 39459



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® INDUSTRIAL MATS

# SUPERFOAM®



- **Sales Tip:** Extremely light-weight anti-fatigue mat designed especially for ease of handling and ergonomic comfort.
- **Where to Specify:** For environments where traditionally much heavier and bulkier mats are used such as: assembly lines, workstations, laboratories, and even home workshops.

- Made from a closed cell PVC Nitrile foam blend, does not absorb liquids and is highly resistant to greases, oils, animal & vegetable fats.
- Overall thickness is 5/8 inch.
- Available in rolls & custom lengths.
- All four sides are beveled to minimize trip hazards (even on rolls and custom lengths).



Black

## #T17 SUPERFOAM®

Stock Sizes	3' x 2'	3' x 3'	3' x 4'	3' x 5'	3' x 6'	3' x 8'
Weight (lbs.)	4.8	7.3	9.7	12.1	14.5	19.4
Roll Sizes & Custom Sizes	3' x 75'	4' x 75'	3' Widths	4' Widths		
Weight (lbs.)	181.4	241.9	.81/sq.ft.	.81/sq.ft.		

Shipping Location: Superior Manufacturing Group - Moselle, MS 39459



# AIRUG® SOF-TRED™

#410  
#411

SAFETY / ANTI-FATIGUE • "DRY • GOOD"



#410

- **Sales Tip:** Recommend the AIRUG® ribbed version for gripping features; SOF-TRED™ version for easy sweeping.
- **Where to Specify:** Work stations where anti-fatigue matting is needed at a low cost.



#411


- Basic anti-fatigue protection provided through 2 versions of this Industry standard.
- PVC closed cell foam relieves leg and back discomfort; provides a barrier to cold floors.
- Overall thickness is 3/8 inch (Sof-Tred also available in 9/16")
- All four sides are beveled to minimize trip hazards.



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® INDUSTRIAL MATS



#410

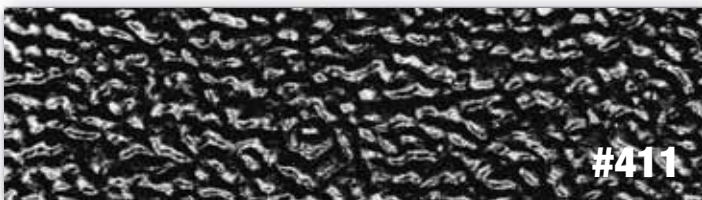

#411



#411 Black

#410 Gray

#410 Black

#410 Black / Yellow

## #410 AIRUG® (& #411)

Stock Sizes	27" x 3'	27" x 5'	2' x 3'	3' x 5'	3' x 12'		
Weight (lbs.) 3/8" thick	3.5	5.6	3	7.4	17		
Weight (lbs.) 9/16" thick	N/A	N/A	6	16	37		
Roll Sizes & Custom Sizes	2' x 60'	3' x 60'	4' x 60'	*6' x 60'	2' Widths	3' Widths	4' Widths
Weight (lbs.) 3/8" thick	53.6	80.9	106	162	0.45/sq.ft.	0.45/sq.ft.	0.45/sq.ft.
Weight (lbs.) 9/16" thick	125	185	250	N/A	1.00/sq.ft.	1.00/sq.ft.	1.00/sq.ft.

\*Black Only

Shipping Location: Superior Manufacturing Group - Moselle, MS 39459

